(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
4 December 2008 (04.12.2008)

PCT

(10) International Publication Number
WO 2008/145168 A1

(51) International Patent Classification:
E21B 33/038 (2006.01)

(21) International Application Number:
PCT/EP2007/004834

(22) International Filing Date: 31 May 2007 (31.05.2007)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant *(for all designated States except US)*: **CAMERON INTERNATIONAL CORPORATION** [US/US]; Suite 1700, 1333 West Loop South, Houston, TX 77027-9109 (US).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **BIESTER, Klaus** [DE/DE]; Am Maschsee 2, 29342 Wienhausen (DE).

(74) Agent: **HILGERS, Hans**; Grünecker, Kinkeldey, Stockmair & Schwanhäusser, Maximilianstraße 58, 80538 München (DE).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

(54) **Title:** MULTICOUPLER

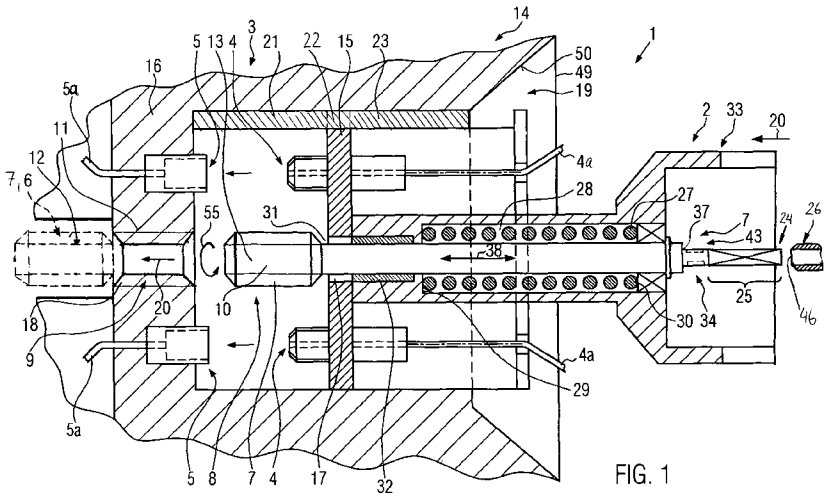


FIG. 1

(57) **Abstract:** A multicoupler, particularly for gas or oil production, comprises at least one male (2) and one female part (3). Said parts (2, 3) comprise a plurality of fluid coupling members (5, 13) which can be assigned to one another and which are in engagement with one another when male part and female part are in the coupling position. One of the parts comprises a connecting means (8) including a spindle (7), which connecting means in the coupling position (6) is in engagement with a mating connecting means on the other part. To improve a multicoupler of this type such that with a simplified constructional configuration and without destruction of parts of the multicoupler a coupling position can also be reliably maintained upon further rotation of the spindle (7), the connecting means comprises a threaded section (10) rotatable by said spindle and the mating connecting means comprises a mating threaded section and a free-rotating chamber, the threaded section being helically movable along the mating threaded section up into the free-rotating chamber (12) while occupying the coupling position.

WO 2008/145168 A1