

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 June 2002 (20.06.2002)

PCT

(10) International Publication Number
WO 02/48487 A1

(51) International Patent Classification⁷: **E05C 1/06**,
1/12, 9/10

(21) International Application Number: PCT/US01/48653

(22) International Filing Date:
11 December 2001 (11.12.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/255,625 13 December 2000 (13.12.2000) US

(71) Applicant: **ASYST TECHNOLOGIES, INC.** [US/US];
48761 Kato Road, Fremont, CA 94538 (US).

(72) Inventor: **BONORA, Anthony, C.**; 270 Family Farm
Road, Woodside, CA 94062 (US).

(74) Agents: **MILLER, Mark, E.** et al.; O'Melveny & Myers
LLP, Embarcadero Center West, 275 Battery Street, Suite
2600, San Francisco, CA 94111-3305 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: LATCH HUB ASSEMBLY

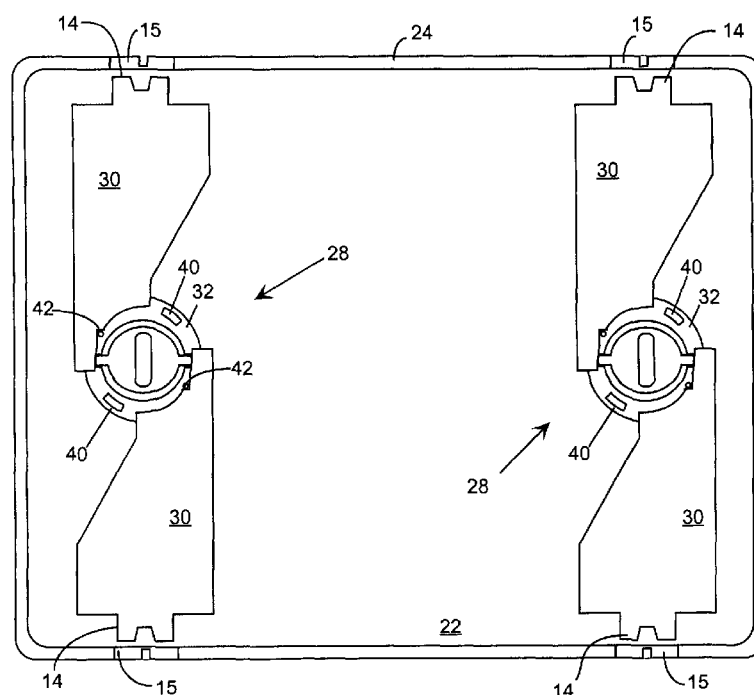

(57) Abstract: A laterally floating latch hub assembly (28) includes a latch key receptor (60) translatablely mounted within a rotatable latch actuation cam (32). Latch keys (33) within a port door (26) are received within the latch key receptor, which is capable of translating laterally to ensure a proper fit of the latch key within the receptor. Once received within the receptor, torque from the latch keys is transmitted to the latch actuation cam via the latch key receptor.



WO 02/48487 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.