



(10) International Publication Number
WO 2011/069504 A1

(43) International Publication Date
16 June 2011 (16.06.2011)

PCT

- | | |
|--|--|
| <p>(51) International Patent Classification:
 F03D 1/00 (2006.01) B66C 23/20 (2006.01)
 E04H 12/34 (2006.01)</p> <p>(21) International Application Number:
 PCT/DK2009/050327</p> <p>(22) International Filing Date:
 9 December 2009 (09.12.2009)</p> <p>(25) Filing Language: English</p> <p>(26) Publication Language: English</p> <p>(71) Applicant (for all designated States except US): WIDEX A/S [DK/DK]; Nymoellevej 6, DK-3540 Lyngby (DK).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): PALUDAN-MULLER, Carsten [DK/DK]; Provst Beckers Vej 7, DK-3650 Olstykke (DK). NOERGAARD, Peter Magnus [DK/DK]; Bygholmvej 11, DK-2720 Vanløse (DK).</p> <p>(74) Agents: NIELSEN, Kim Garsdal et al.; Awapatent A/S, Rigersgade 11, DK-1316 København K (DK).</p> | <p>(81) Designated States (<i>unless otherwise indicated, for every kind of national protection available</i>): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.</p> <p>(84) Designated States (<i>unless otherwise indicated, for every kind of regional protection available</i>): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).</p> |
|--|--|

[Continued on next page]

- (54) Title:** METHOD OF PROCESSING A SIGNAL IN A HEARING AID, A METHOD OF FITTING A HEARING AID AND A HEARING AID

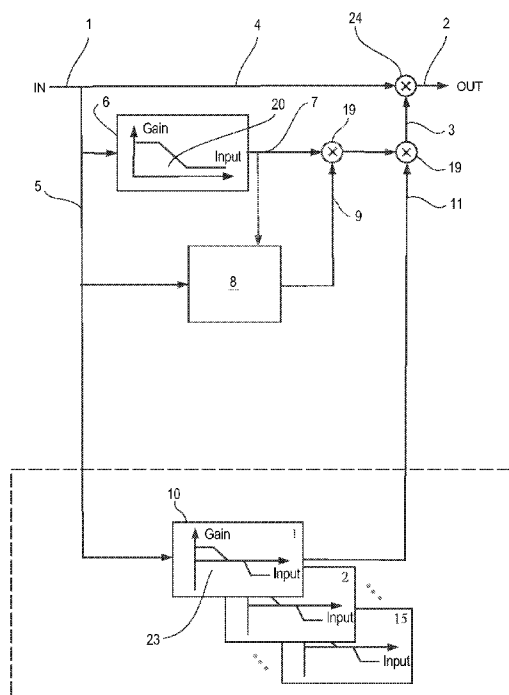


Fig. 1

- (57) Abstract:** The present invention relates in a first aspect to a method of processing a signal in a hearing aid, in a second aspect to a method of fitting a hearing aid to a hearing aid user, and in a third aspect to a hearing aid. The method according to the first aspect of the invention comprises deriving a control signal (3) from an input signal (1). The process of deriving the control signal comprises a standard processing (6) so as to provide a standard processed control signal component (7) 10 based on a standard compressor characteristic, and an individualized processing (10) so as to provide an individualized processed control signal component (11) based on an individualized compressor characteristic. The standard and individualized processed control signal components are multiplied together to form the control signal.



Published:

— *with international search report (Art. 21(3))*