



(51) International Patent Classification:

B03C 3/08 (2006.01) *B03C 3/41* (2006.01)
B03C 3/10 (2006.01) *B03C 3/47* (2006.01)
B03C 3/36 (2006.01) *B03C 3/09* (2006.01)

(21) International Application Number:

PCT/NL2012/050792

(22) International Filing Date:

9 November 2012 (09.11.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2007755	9 November 2011 (09.11.2011)	NL
2008621	11 April 2012 (11.04.2012)	NL
12178153.8	27 July 2012 (27.07.2012)	EP

(71) Applicant: **TECHNISCHE UNIVERSITEIT DELFT**
[NL/NL]; Stevinweg 1, NL-2628 CN Delft (NL).

(72) Inventors: **URSEM, Willibrordus Nicolaas Johannes**;
p/a TU Delft Valorisation Centre, Postbus 5, NL-2600 AA
Delft (NL). **VAN DE VORLE - HOUBEN, Elisabeth Jo-**
hanna Jacoba; Torenstraat 28, NL-5438 AP Gassel (NL).
DE HAAR, Johannes Anthonius Wilhelmus; Tuinlaan
26, NL-6681 ET Bemmelen (NL).

(74) Agent: **ELLENS, Andries**; Agro Business Park 20, NL-
6708 PW Wageningen (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: APPARATUS WITH CONDUCTIVE STRIP FOR DUST REMOVAL

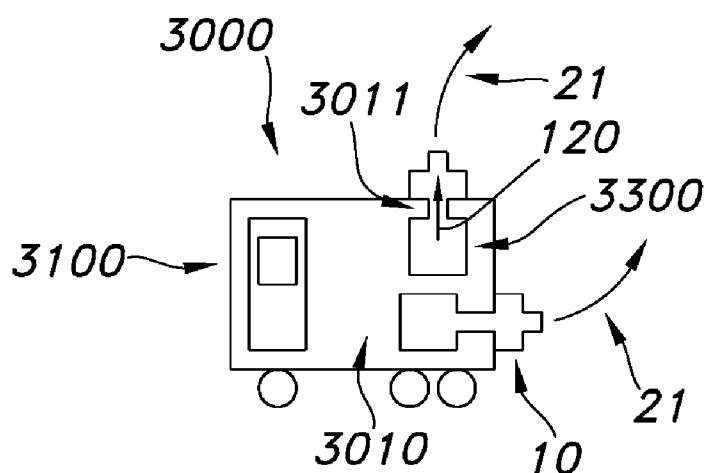


FIG. 8d

(57) Abstract: The invention provides a gas puri-
fication system, for instance for agricultural applica-
tion comprising a corona discharge system, the
corona discharge system comprising a counter elec-
trode, a conductive strip with a longitudinal edge
comprising tooth structures, wherein the tooth
structures have tooth tops with shortest distances
selected from the range of 2-200 mm; and a voltage
generator configured to apply a DC voltage of at
least 10 kV to the conductive strip.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*