

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 February 2005 (03.02.2005)

PCT

(10) International Publication Number
WO 2005/009884 A1

(51) International Patent Classification⁷: **B66B 13/30**

(21) International Application Number:
PCT/JP2004/010372

(22) International Filing Date: 14 July 2004 (14.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-202455 28 July 2003 (28.07.2003) JP

(71) Applicant (for all designated States except US):
TOSHIBA ELEVATOR KABUSHIKI KAISHA
[JP/JP]; 5-27, Kitashinagawa 6-chome, Shinagawa-ku,
Tokyo 1410001 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MURAKAMI, Shin**
[JP/JP]. **KINOSHITA, Toru** [JP/JP].


(74) Agents: **SUZUYE, Takehiko** et al.; c/o **SUZUYE & SUZUYE**, 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo, 1000013 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: SEALING DEVICE FOR ELEVATOR

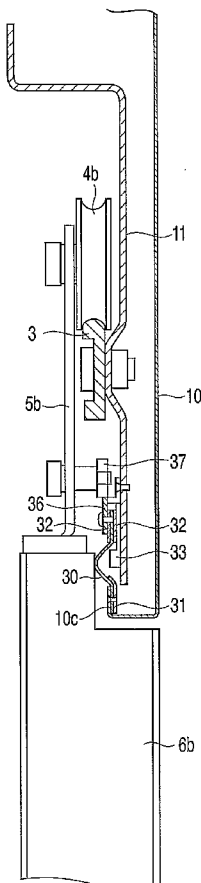

(57) Abstract: A sealing device for an elevator door includes a doorway member (10), doors (6a, 6b), a movable member (32), a push-down mechanism (36, 37) and a sealing mechanism (30). The doorway member (10) is provided for a gate. The doors (6a, 6b) open or close along the doorway member (10). The movable member (32) is set horizontally and provided to be movable in a vertical direction in the doorway member (10), and it is urged upwards by an urging unit (35). The push-down mechanism (36, 37) pushes down the movable member (32) against the force of the urging unit (35) just before the doors (6a, 6b) are closed. The sealing mechanism (30) is kept non-contact with the doors (6a, 6b) while they are moving, and seals the gap between the doors (6a, 6b) and the doorway member (10) as it is brought into contact with upper section of the doors (6a, 6b) when the movable member (32) is pushed down by the push-down mechanism (36, 37).

WO 2005/009884 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*