

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 March 2003 (27.03.2003)

PCT

(10) International Publication Number
WO 03/024535 A1

(51) International Patent Classification⁷: **A62C 35/58**

(21) International Application Number: PCT/FI02/00727

(22) International Filing Date:
10 September 2002 (10.09.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20011841 19 September 2001 (19.09.2001) FI

(71) Applicant (*for all designated States except US*): **MAR-IOFF CORPORATION OY** [FI/FI]; Hakamäenkuja 4, P.O. Box 25, FIN-01511 Vantaa (FI).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **SUNDHOLM, Göran** [FI/FI]; Ilmari Kiannon kuja 3, FIN-04310 Tuusula (FI).

(74) Agent: **HEINÄNEN OY**; Annankatu 31-33 C, FIN-00100 Helsinki (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SPRAYING APPARATUS

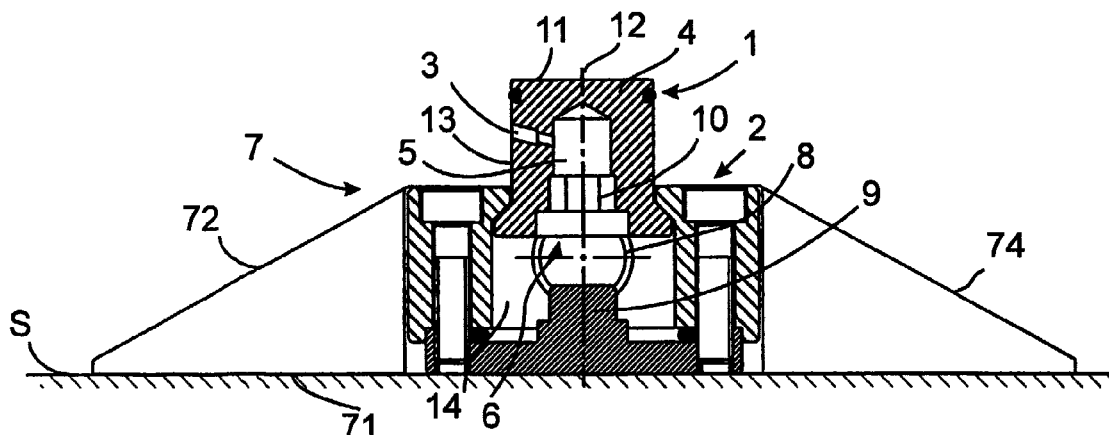

(57) Abstract: Spraying apparatus, designed especially for fire-fighting purposes, comprising at least one spray head (1) and one holder (2), in which the spray head can be moved between at least two positions, the spray head being in a retracted position when in an inactive state, and when it is in an active state, at least one of the nozzles of the spray head lies above the edges of the holder. The spray head (1) is disposed in a surface-mounted structural part (7) comprising at least one spray head holder (2) and means (8) for supplying a medium to be sprayed, such as an extinguishing medium, into the spray head.



WO 03/024535 A1