

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 February 2003 (06.02.2003)

PCT

(10) International Publication Number
WO 03/009901 A3

(51) International Patent Classification⁷: **B63C 9/08**

(21) International Application Number: PCT/US02/23350

(22) International Filing Date: 24 July 2002 (24.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/307,392 25 July 2001 (25.07.2001) US
10/200,496 23 July 2002 (23.07.2002) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: **SIMULA, INC.** [US/US]; 2625 South Plaza Drive, Suite 100, Tempe, AZ 85282 (US).

Published:
— with international search report


(72) Inventor: **BRADLEY, Gary**; 111 Glenwood Lane, Hendersonville, NC 28792 (US).

(88) Date of publication of the international search report:
30 October 2003

(74) Agents: **GOTTS, Lawrence, J.** et al.; Shaw Pittman LLP, 1650 Tysons Boulevard, McLean, VA 22102-4859 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MULTI-CHAMBERED FLOTATION DEVICE

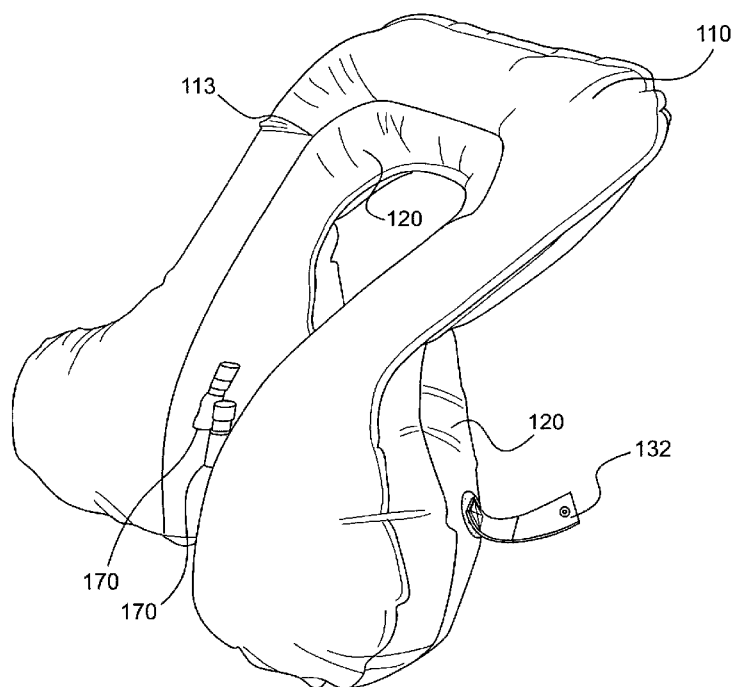

(57) **Abstract:** A system (100) for maintaining a afloat in a fluid environment is disclosed. The system includes multiple chambers (110, 120) such that if one chamber fails to operate, redundant chambers will function to maintain the user afloat in a face-up position. In a preferred embodiment, there are multiple activation mechanisms (170, 705) to ensure inflation of the chambers if a single activation mechanism fails to function.



WO 03/009901 A3