



- (51) **International Patent Classification:**
H04W 72/04 (2009.01)
- (21) **International Application Number:**
PCT/US2020/023284
- (22) **International Filing Date:**
18 March 2020 (18.03.2020)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
201941012235 28 March 2019 (28.03.2019) IN
201941033642 21 August 2019 (21.08.2019) IN
16/821,678 17 March 2020 (17.03.2020) US
- (71) **Applicant: QUALCOMM INCORPORATED** [US/US];
ATTN: International IP Administration, 5775 Morehouse
Drive, San Diego, California 92121-1714 (US).
- (72) **Inventors: BHATTAD, Kapil;** 5775 Morehouse Drive,
San Diego, California 92121 (US). **SUN, Jing;** 5775 More-

house Drive, San Diego, California 92121 (US). **ZHANG, Xiaoxia;** 5775 Morehouse Drive, San Diego, California 92121 (US). **THYAGARAJAN, Ananta Narayanan;** 5775 Morehouse Drive, San Diego, California 92121 (US).

(74) **Agent: HARRITY, John E.** et al.; 11350 Random Hills Road, Suite 600, Fairfax, Virginia 22030 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

(54) **Title:** CONFIGURING A STARTING OFFSET FOR A CONFIGURED GRANT UPLINK COMMUNICATION

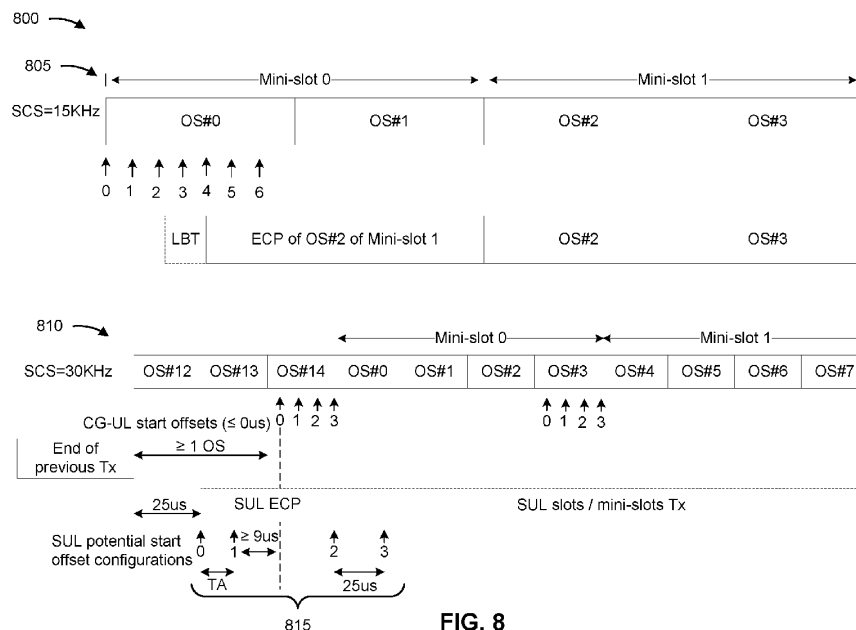


FIG. 8

(57) **Abstract:** Various aspects of the present disclosure generally relate to wireless communication in a shared spectrum. In some aspects, a user equipment may receive an indication of a set of starting offsets for an uplink communication, wherein the set of starting offsets includes at least one negative starting offset relative to a start of a slot or a mini-slot in which the uplink communication is configured to start; select a starting offset from the set of starting offsets; and transmit the uplink communication, wherein the uplink communication starts at a time indicated by the selected starting offset. Numerous other aspects are provided.

[Continued on next page]

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))