



(51) International Patent Classification:

A47J 31/00 (2006.01) A47J 31/46 (2006.01)
A47J 31/36 (2006.01)

(21) International Application Number:

PCT/IB2011/001190

(22) International Filing Date:

31 May 2011 (31.05.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PCT/IB2010/001300 31 May 2010 (31.05.2010) IB

(71) Applicant (for all designated States except US): **TUT-TOESPRESSO S.R.L.** [IT/IT]; Via per Caronno, 23/25, I-21040 Origgio (VA) (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DOGLIONI MAJER, Luca** [IT/IT]; Via Dei Cristoforis, 14/16, I-22010 Carate Uriò (IT).

(74) Agent: **GISLON, Gabriele**; Marietti, Gislone e Trupiano S.r.l., Via Larga, 16, I-20122 Milan (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: DEVICE AND METHOD FOR PREPARATION OF BEVERAGES WITH DIFFERING TASTES

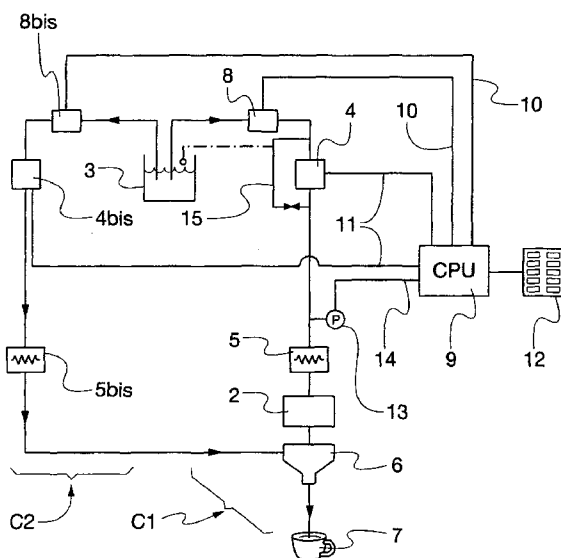


Fig. 1

(57) Abstract: A beverage dispensing machine comprises a first hydraulic circuit including a water source, a pump, a water heating means, a brewing means selected from a brewing chamber and a capsule, the brewing means having inlet and outlet means, beverage collecting means for collecting brewed beverage leaving said brewing means and for dispensing said beverage to a container, further comprises a second hydraulic circuit that includes a second pump and second water heating means, the outlet of said second water heating means being connected to said first circuit at a location that is downstream to the said brewing means with respect to the water flow in said first circuit. The first circuit comprises means to maintain in the brewing means a pressure substantially constant for a pre-set time, the pressure being less than the opening pressure for the brewing means.