

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 May 2007 (03.05.2007)

PCT

(10) International Publication Number
WO 2007/049847 A1

(51) International Patent Classification:

F21V 8/00 (2006.01) **G09F 13/18** (2006.01)
F21V 29/00 (2006.01) **G02F 1/13357** (2006.01)

(21) International Application Number:

PCT/KR2006/001700

(22) International Filing Date: 4 May 2006 (04.05.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

10-2005-0101018 26 October 2005 (26.10.2005) KR
10-2005-0126542
21 December 2005 (21.12.2005) KR
10-2006-0001562 6 January 2006 (06.01.2006) KR

(71) Applicant (for all designated States except US): **FA-WOO TECHNOLOGY CO., LTD.** [KR/KR]; #102-802, Bucheon Technopark, 364 Samjeong-dong, Ojeong-gu, Bucheon-si, Gyeonggi-do 421-809 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **YOO, Tae Kun** [KR/KR]; 304-1202 Hugok Village, Ilsan-3-dong, Ilsan-gu, Gyeonggi-do 411-730 (KR).

(74) Agents: **KIM, Byung Jin** et al.; #101 Cheongwon Bldg., 828-5 Yeoksam-dong, Gangnam-gu, Seoul 135-080 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(48) Date of publication of this corrected version:


26 July 2007

(15) Information about Correction:

see PCT Gazette No. 30/2007 of 26 July 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: BACKLIGHT UNIT CAPABLE OF EASILY FORMING CURVED AND THREE-DIMENSIONAL SHAPE

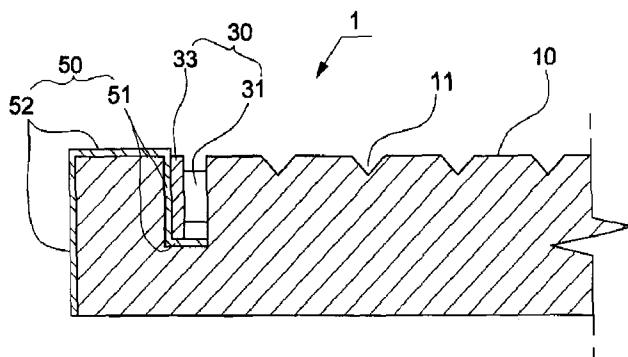

(57) Abstract: Disclosed herein is a backlight unit (1), capable of easily forming a curved or three-dimensional shape. The backlight unit (1) according to the present invention comprises a light guide panel (10) which includes a light guide plate having on one surface of both surfaces thereof a plurality of notches (11), an uneven dot pattern, a printed dot pattern or a sanded surface, of a light diffusion plate; a luminous means which includes a lamp (31) mounted on a PCB (33) to emit light to the light guide panel (10); a groove (13) formed along an edge of the light guide panel (10) so that the luminous means is installed in the light guide panel; and a thin heat radiating plate (50) fixed on a back surface of the PCB (33) along the groove.

WO 2007/049847 A1