

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 March 2003 (27.03.2003)

PCT

(10) International Publication Number
WO 2003/026342 A3

(51) International Patent Classification⁷: **H04R 1/10**,
H01Q 1/00, H04B 1/18

[GB/GB]; Harrogate, Canada Common, West Wellow,
Romsey, Hampshire SO51 6DH (GB).

(21) International Application Number:
PCT/EP2002/010612

(74) Agents: **ALLEN, Derek** et al.; Siemens Shared Services
Limited, Intellectual Property Department, c/o Siemens
AG, P.O. Box 16 22 34, 80506 Munich (DE).

(22) International Filing Date:
17 September 2002 (17.09.2002)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,
SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0122261.1 17 September 2001 (17.09.2001) GB
0203361.1 13 February 2002 (13.02.2002) GB

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **ROKE
MANOR RESEARCH LIMITED** [GB/GB]; Roke
Manor, Old Salisbury Lane, Romsey, Hants SO51 0ZN
(GB).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **CORK, Peter**
[GB/GB]; Risdon, The Crescent, Romsey, Hampshire
SO51 7NG (GB). **CORNFORTH, John, Anthony**

Published:

— with international search report

[Continued on next page]

(54) Title: A HEADPHONE

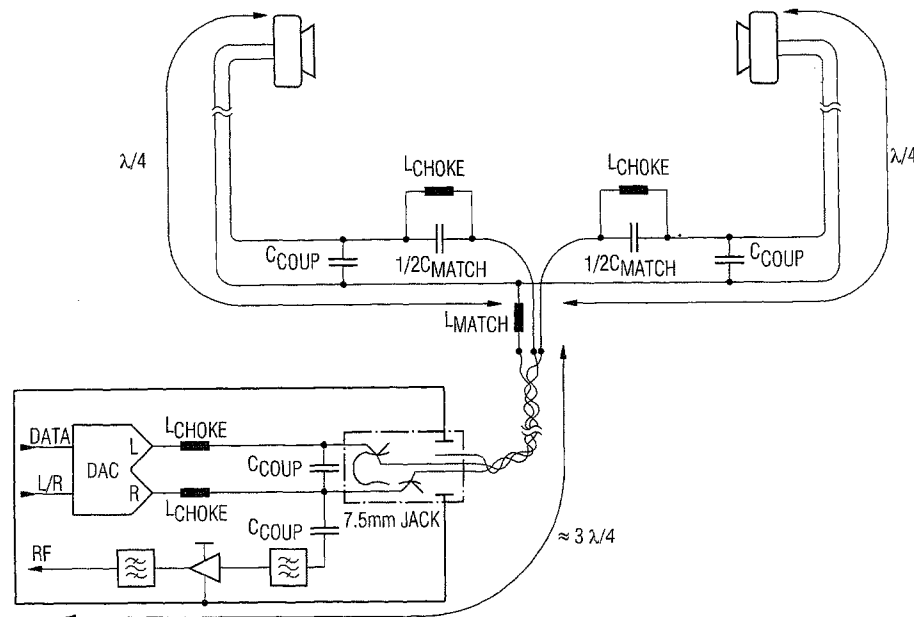

(57) Abstract: A receiver assembly comprising a housing, receiver unit, and having left and right audio stereo output lines which connect to a connection for connection to a headphone each of left and right lines having an impedance in series and also having a capacitance connecting the left and right audio lines said capacitance being located at a point between the connector and non output side of the inductance and wherein the receiver unit and audio lines are connected via an inductance.

WO 2003/026342 A3



(88) Date of publication of the international search report:

11 March 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.