

AI

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
7 March 2002 (07.03.2002)

PCT

(10) International Publication Number
WO 02/18277 A1

(51) International Patent Classification⁷: C02F 1/48, 1/46

(21) International Application Number: PCT/AU01/01096

(22) International Filing Date: 31 August 2001 (31 08 2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PQ 9894 1 September 2000 (01.09.2000) AU

(71) Applicant (for all designated States except US): **Q-TECH LABORATORIES** [AU/AU], 367 - 375 Taylor Street, TOOWOOMBA, Queensland 4350 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SKRINJAR, Terrence, John** [AU/AU], Q-TECH LABORATORIES, 367 - 375 Taylor Street, TOOWOOMBA, Queensland 4305 (AU).

(74) Agent: **CULLEN & CO.**, Level 26, 239 George Street, MLC Centre, BRISBANE, Queensland 4000 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette

(54) Title: WATER TREATMENT APPARATUS

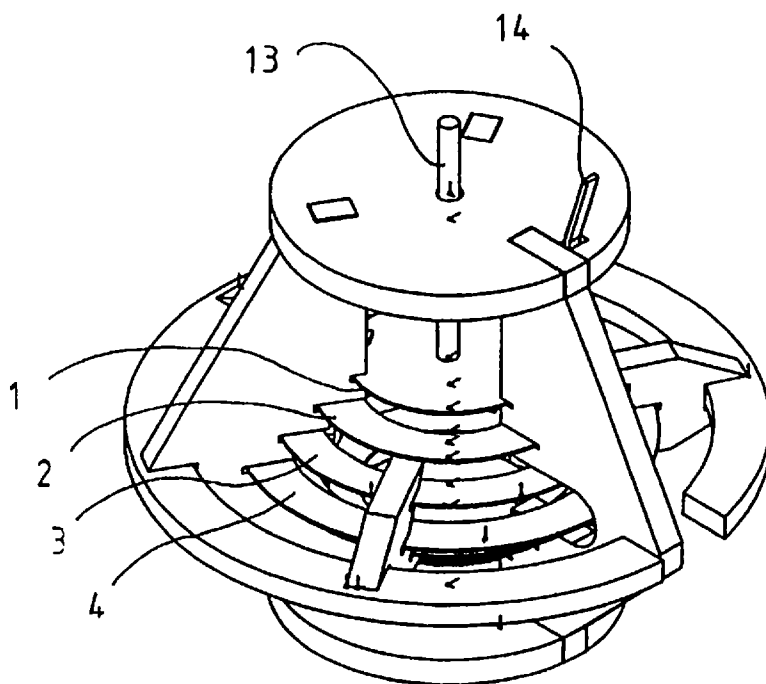

(57) Abstract: An apparatus for generating an electromagnetic field in water. The apparatus comprises a set of spaced electrically conductive rings, which are respectively positively charged (rings 2, 6) and negatively charged (rings 3, 5). The rings are on a common axis between a negative plate (1) and a positive plate (7) and have precise spacings and dimensions. A central neutral ring (4) separates the pairs of rings. The electromagnetic field generated is such as to produce increases in the organic electrolytic functionality of living cellular material which is contacted with the water.

WO 02/18277 A1