

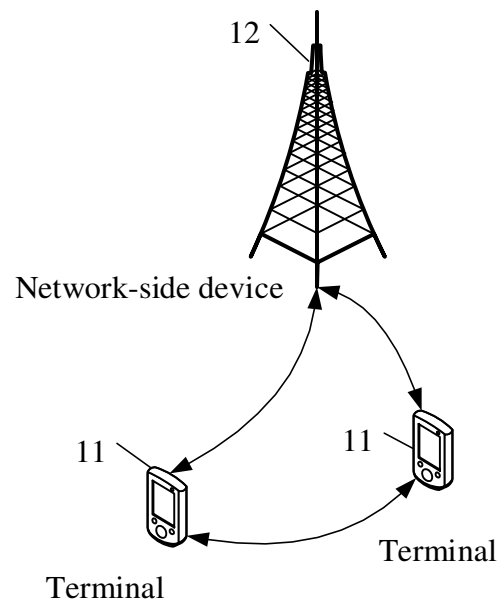


FIG. 1

200

Determine a sidelink configuration of a sidelink relay architecture based on at least one of the following: pre-configuration information; a system message received from a camping cell or serving cell; first configuration information from a relay terminal; and second configuration information from a network-side device

~ S202

FIG. 2

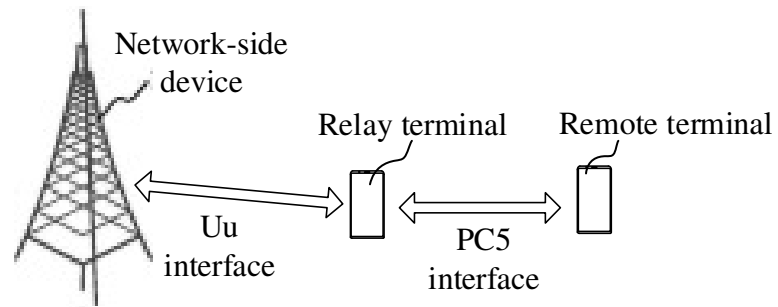


FIG. 3

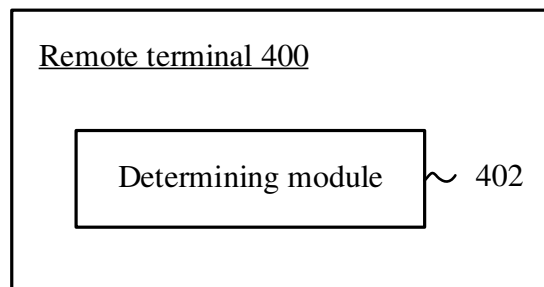


FIG. 4

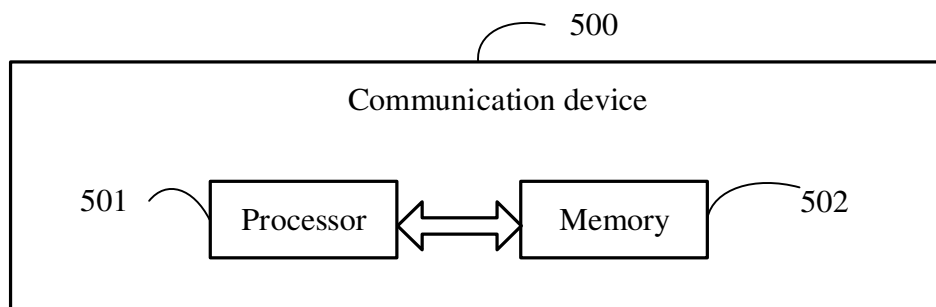


FIG. 5

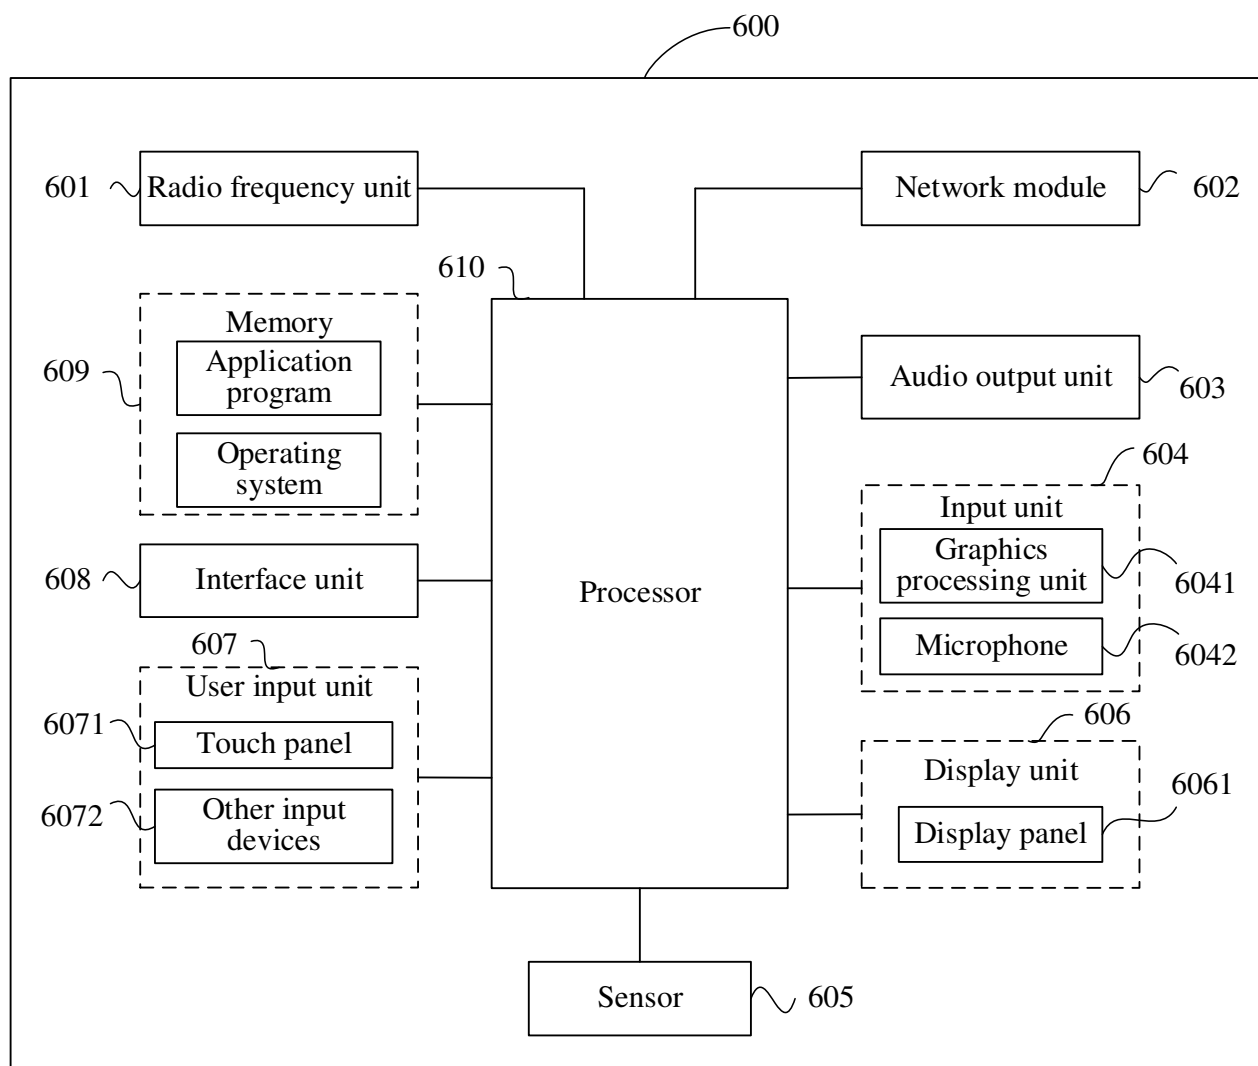


FIG. 6