

## Description.

## BACKGROUND OF THE INVENTION

This invention relates to a silane-containing dispersing agent intended for use in the dispersion of ferromagnetic particles employed in magnetic coating. More particularly, this invention relates to compositions containing silylated polyethers or isocyanato silanes with organophosphates as the silane-containing dispersing agent.

## PRIOR ART

Audio and video tape and other information-storing magnetic media, can be prepared by coating Mylar® or some other non-magnetic substrate with a solvent-based magnetic coating containing fine ferromagnetic particles dispersed in a suitable polymeric binder. In conventional practice, the acicular (needlelike) ferromagnetic particles are oriented in a magnetic field and the solvent is evaporated.

The current trend in the electronics industry is toward higher information density which can be achieved with suitable dopants (often cobalt) and by the use of progressively smaller ferromagnetic particles of high coercive strength. These factors increase dispersion viscosity enormously. Consequently, effectively dispersing agents are needed to achieve the high particle loading density required.

Prior art teaching dispersing agents for magnetic media dates back 15-20 years. US-A-3,144,352 describes the use of lecithin. GB-A-1,080,614 describes the use of oleic acid lubricant and monobutyl phosphate dispersant. DE-A1-2,543,962 teaches the use of aminosilanes for improved dispersibility and abrasion resistance. US-A-4,076,890 teaches a range of organofunctional silanes as dispersing agents (including alkyl, amino, mercapto, epoxy, vinyl, chloro) in magnetic media for abrasion resistance and reduced drop-out.

Organofunctional silanes have likewise been reported as improving the squareness ratio in magnetic coatings. Japanese Kokai 81 49 767 and CA 95-99506.

Phosphate dispersants are widely reported in the literature. Sodium metaphosphate (CA 86-199032). Potassium dihydrogen phosphate (Japanese Kokai 79,143,894). Polyethylene-polypropylene glycol monoether phosphates (Japanese Kokai 82,205,461). Dioctylphosphate (EP-A1-48456). Phosphoric acid alkyl ester (US-A-4,244,987). Lecithin (US-A-3,144,352 and 4,196,258).

Combinations of aminosilanes with a surfactant are disclosed in Japanese Kokai 58,155,517 and US-A-4,244,987.

In broad strokes, the prior art mentions the use of a range of organofunctional silanes for various benefits in magnetic coating. Notably absent, however, are references to polyether silanes or isocyanato silanes. Cited dispersing agents also include a range of candidates, chiefly the phosphates.

The fragile needle-like ferromagnetic particles have an unusually high propensity to form strong aggregates primarily because of magnetic attraction between particles. To a lesser degree, particle asymmetry, surface area, surface roughness and sorbed species (air, water) also favor agglomeration. When an inappropriate dispersing agent is used, mechanical dispersion can fracture the ferromagnetic particle causing a performance loss. This is of particular concern with fine ferromagnetic particles designed for higher information density. Thus an effective dispersing agent, such as presently set forth, performs an important function.

This present invention is novel in that it provides the use of a combination of a polyether silane or isocyanato silane and an organophosphate as an effective dispersing agent for use in magnetic coatings. Unexpected benefits in the reduction of viscosity is an important aspect of this invention not previously described in the prior art.


## SUMMARY OF THE INVENTION

The composition of a silylated polyether or an isocyanato silane with an organophosphate outperformed "state of the art" dispersing agent. The dispersant of the present invention was found to be effective when integrally added or pretreated on the ferromagnetic particle. Because dispersion viscosity is effectively reduced, higher pigment loadings without the loss of film integrity; reduced grinding times; reduced surfactant demand; magnetic coatings with improved tensile strength, squareness (ratio of remnant magnetic flux density to saturation magnetic flux density) magnetic properties, surface appearance and less migration of dispersing agent to the surface of the magnetic coating are expected as concomitant benefits.

## DETAILED DESCRIPTION OF THE INVENTION













In accordance with the instant invention there is provided a dispersing composition useful in the dispersion of ferromagnetic particles in the manufacture of magnetic coatings. This dispersing composition comprises a silylated polyether or an isocyanato silane with a phosphate.

The silylated polyether employed as a component in the dispersing agent of the present invention is of the general formula:



where R<sup>1</sup> is individually a hydrogen atom, an alkyl group having from 1 to 12 carbon atoms, an alkoxy alkyl group having from 2 to 12 carbon atoms, or an acyl group having from 6 to 12 carbon atoms; R<sup>2</sup> is individually a hydrogen atom, an alkyl group having from 1 to 18 carbon atoms or an aryl group having from 6 to 18 carbon atoms; R<sup>3</sup> is individually a hydrogen atom, an alkyl group having from 1 to 12 carbon atoms, an aryl group having from 6 to 18 carbon atoms or an aryl alkyl group having from 7 to 18 carbon atoms; R<sup>4</sup> is individually an alkyl group having 1 to 4 carbon atoms; the sum of x + y has a value of from 2 to 100, preferably 10 to 60; z has a value of 1, 2 or 3 and preferably is equal to 1; w has a value 0 to 6, preferably 3; m has a value of 1, 2 or 3; and a has a value of 0 or 1.

Exemplary silylated copolyethers which are useful in practicing the present invention include

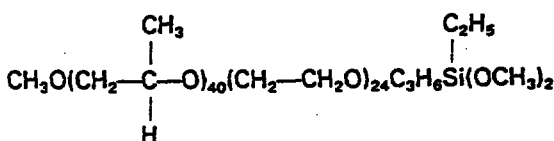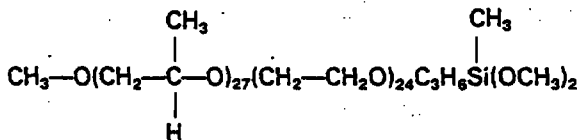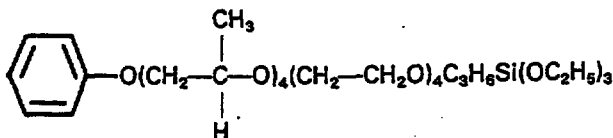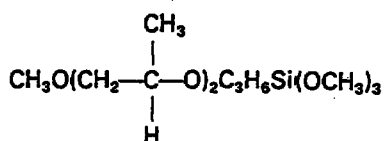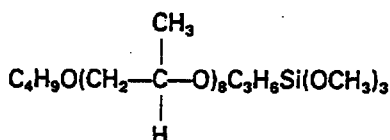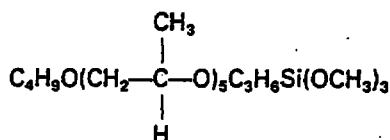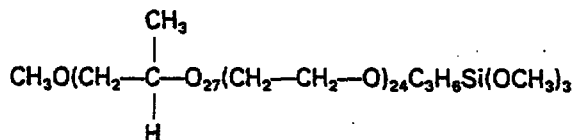


Generally, the silylated copolyethers are commercially available or they may be prepared by reacting a hydroxyl end capped polyether with allyl chloride followed by the hydrosilylation of the adduct, i.e., as taught in US-A-2,868,824 and 2,846,458.





The isocyanato silane employed as an alternative to the silylated copolyether component in the dispersing agent is of the general formula



where  $\text{R}^6$  is individually an alkyl group having 1 to 4 carbon atoms;  $\text{R}^7$  is individually a hydrogen atom, an alkyl group having from 1 to 12 carbon atoms, an alkoxy alkyl group having from 2 to 12 carbon atoms or an acyl group having from 6 to 12 carbon atoms;  $b$  is 0, 1, 2 or 3; and  $\text{R}^5$  is an alkylene, arylene or aralkylene group having from 1 to 18 carbon atoms or  $\text{OCN}-\text{R}^5-$  can be a group of the formula:

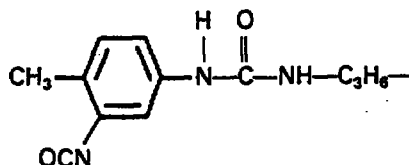


Exemplary isocyanato silanes include

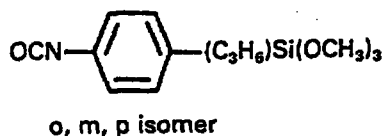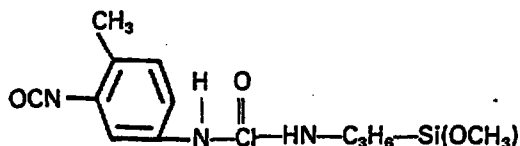












The isocyanato silanes are commercially available or they may be prepared by forming the carbamate adduct of an alkylchloroformate with an aminoalkyltrialkoxysilane and cracking the carbamate to form the isocyanato silane and alkanol. See for instance US-A-3,607,901.

The organo phosphate employed as a second component in the dispersing agent of the present invention is of the general formula:

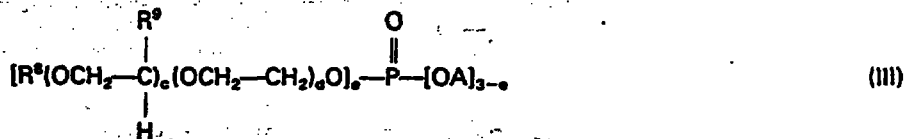

where  $\text{R}^8$  is a hydrogen atom or an alkyl group containing from 1 to 20 carbon atoms;  $\text{R}^9$  is a hydrogen atom, an alkyl group containing from 1 to 4 carbon atoms, an aryl group containing from 6 to 18 carbon atoms; or an alkylaryl group containing from 7 to 17 carbon atoms; the sum of  $c + d$  has a value of from 0 to 100, preferably 0, 1 or 2 when the sum of  $c + d$  is greater than zero most preferably  $c$  is at least 1;  $e$  has a value of 1 or 2; and  $\text{A}$  is a hydrogen, sodium, potassium or lithium atom or an  $\text{NH}_4$  group.

Exemplary organo phosphates which are useful in practicing the present invention include

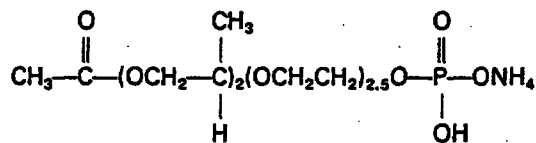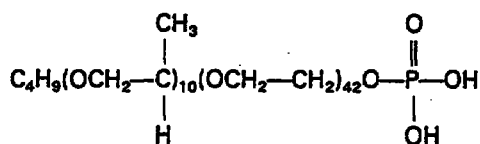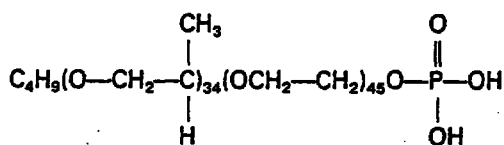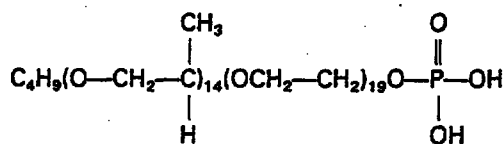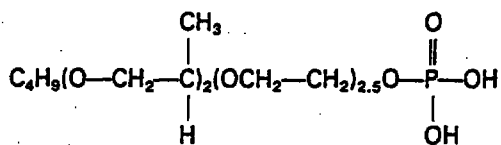

Generally, the phosphates may be prepared by the phosphorylation of a hydroxy endblocked polyalkylene oxide or a primary alcohol with polyphosphoric acid or phosphorus pentoxide. It is believed that phosphorylation is preferably conducted in such a manner as to maximize mono-ester formation and minimize formation of diorgano phosphate esters and free phosphoric acid. See US-A-3,235,627 and 4,416,830.

In addition to the silylated copolyethers and the phosphates, the dispersing agent may optionally contain the following:

- (a) Ancillary wetting agents (e.g. lecithin);
- (b) Acid scavengers (e.g. propylene oxide);
- (c) Organomodified silicone fluids to modify surface tension, surface lubricity or reduce static charge;
- and
- (d) Adhesion promoters.

The ratio of silylated polyethers to phosphate is from 10:90 to 99:1, preferably 25:75 to 75:25.

The ratio of isocyanato silane to phosphate is from 35:65 to 99:1 preferably 50:50 to 90:10.

The manner in which the dispersing agent acts to disperse the ferromagnetic particles is subject to scientific conjecture and may involve two separate stages, each requiring a specific component. The understanding of this mechanism is not, however, a critical aspect of this invention.

One component of this present invention is a low molecular weight anionic polyether or alcohol ester acid phosphate which is sorbed on the ferromagnetic particle. In this first stage sorption, the ferromagnetic particles acquire a greater charge and are subsequently separated by electrostatic repulsion which counteracts the usual magnetic forces of attraction. Because most magnetic coating formulations are typically nonaqueous, this electrokinetic effect resides close to the ferromagnetic particle surface. Consequently this first stage sorption gives a quick but short range separation that initiates the deagglomeration process.

This limited separation exposes ferromagnetic particle surface area to a second stage sorption of a higher molecular weight polyether silane which may ultimately covalently bond to the ferromagnetic particle via Si—O linkages. The bulky silylated polyether acts to further increase and maintain ferromagnetic particle separation. Since the force of magnetic attraction diminishes with the distance of particle separation, agglomerates are effectively deagglomerated and the tendency to reagglomerate is diminished.

Additional factors may also be involved. The polyalkylene oxide moiety present in either component of the invention is believed to facilitate desorption of air and water from the ferromagnetic particle surface, render the particle surface more organophilic and therefore more susceptible to wetting by the organic solvent and/or the polymer binder.

Other agents used in the preparation of the magnetic coatings include organic solvents (acetone, MEK, THF, DMF); thermoplastic polymeric binder (polyurethane, PVC, phenoxy resin, acrylic resin, cellulosic resins); thermoset resins (epoxy); electron beam curable oligomers (urethane acrylates); cross linkers or curing agents (polyisocyanates); lubricating agents (silicone fluids, organomodified silicone fluids, fatty acids and corresponding derivatives); antistatic agents (halo- and quarternary nitrogen compounds); conductive pigments (carbon black); wetting agents (lecithin, "Aerosol OT"), and additional silanes to improve adhesion or other properties.

The dispersing agent may be either pretreated onto the ferromagnetic particles from aqueous or organic solvent slurry or integrally added to the coating formulation.

In general the magnetic recording medium consists of a support having thereon a magnetizable recording layer in which the ferromagnetic particles are dispersed in a binder, the contained ferromagnetic particles having been processed with the dispersing agent of the present invention.

The magnetizable powders which can be used in the present invention include the generally known and conventional ferromagnetic powders. Suitable ferromagnetic powders are  $\gamma$ -Fe<sub>2</sub>O<sub>3</sub>, Co doped  $\gamma$ -Fe<sub>2</sub>O<sub>3</sub>, Fe<sub>3</sub>O<sub>4</sub>, Co-doped Fe<sub>3</sub>O<sub>4</sub>, CrO<sub>2</sub>, ferromagnetic alloy powders or mixtures thereof. Specific examples of these ferromagnetic alloy powders are as follows: Fe—Co, Fe—Ni, Fe—Co—Ni, Fe—Ni—Zn, Fe—Mn—Zn, Fe—Co—Ni—B, Fe—Co—Ni—Cu—Zn, Fe—Co—Ni—Cr, Fe—Co—Ni—P, Fe—Ga—As, Fe—As—Te, Fe—Mn, Zn—Cr, Ni—Co, Ni—Cu, Ni—Cr, Co—Mn, Co—Mg, Ni—Co—As—Sb, Ni—Co—As—Sb, Cr—Ga—As, Cr—As—Te, and Cr—As—Sb.

These alloys are well-known in the art and are described in US-A-3,026,215; 3,031,341; 3,100,194; 3,242,005 and 3,389,014; GB-A-752,659; 752,659; 782,762 and 1,007,323; FR-A-1,107,654; DE-A1-1,281,334.

These ferromagnetic powders are generally used at about 300 parts by weight in a binder at a level of 50 to 200 parts by wt., preferably 70 to 150 parts by wt. The particle size range of the ferromagnetic powder generally employed is a particle size of 0.2 to 2  $\mu$ m in length, with an aspect ratio of 1/1 to 20/1.

Solid additive particles generally present in the magnetizable layer are inorganic particles such as carbon black, graphite, molybdenum disulfide, tungsten disulfide, clay, silica, carbonates, alumina powder, abrasive materials, and metal oxides, and these are particularly effective. Organic particles such as fine powders of fluorine-containing resins, polyolefin resins, and polyamide resins can also be incorporated with no particular detrimental influences. The fluorine-containing resins generally have a molecular weight from 80,000 to 120,000 and are materials such as trifluorochloroethylene, and tetrafluoroethylene, the

polyolefins resins generally have a molecular weight of 800,000 to 1,200,000 and are materials such as polyethylene and polypropylene and the polyamide resins generally have a molecular weight of 5,000 to 200,000 and are materials such as 6-nylon, 6,6-nylon, 6,10-nylon, 7-nylon, 9-nylon, and 11-nylon. These materials are described in Japanese Patent Publications Nos. 40461/71 and 32001/72. These solid additive particles are added, in particular, as antistatic agents, lubricants, surface-matting agents or a tape durability-improving agents as described in US—A—3,293,066; 2,258,106; 3,312,563; 3,517,378 and 3,630,914. They are often utilized generally in the production of tapes at a level of 0.1 to 25 wt%, preferably 0.2 to 13 wt%, of the inorganic or organic particles per 100% by wt. of the ferromagnetic powder; with particle sizes of 0.02 to 2  $\mu\text{m}$  preferably 0.08 to 1  $\mu\text{m}$ .

As the binder used for the recording layer in the present invention, a conventionally known thermoplastic resin, thermosetting resin, (or reaction-type resin) or mixtures thereof are used.

As the thermoplastic resins, those having a softening point of less than 150°C, a mean molecular weight of 10,000 to 200,000 and a copolymerization degree of 400 to 500, such as vinyl chloride-vinyl acetate copolymers, vinyl chloride-vinylidene chloride copolymers, vinyl chloride-acrylonitrile copolymers, acrylate-acrylonitrile copolymers, acrylate-vinylidene chloride copolymers, acrylate-styrene copolymers, methacrylate-acrylonitrile copolymers, methacrylate-vinylidene chloride copolymers, methacrylate-styrene copolymers, urethane elastomers, polyvinyl fluorides, vinylidene chloride-acrylonitrile copolymers, butadiene-acrylonitrile copolymers, polyamide resins, polyvinyl butyrals, cellulose derivatives (such as cellulose diacetate cellulose triacetate, cellulose propionate, cellulose acetate butyrate, nitrocellulose etc.), styrene-butadiene copolymers, polyester resins, chlorovinyl ether-acrylate copolymers, amino resins, and various synthetic rubber thermoplastic resins are used.

The thermosetting resin or reaction-type resin used preferably has a molecular weight of less than about 200,000 in the state of a coating solution and, upon heating after coating and drying, the molecular weight becomes infinite due to the reaction of condensation, addition, etc. Of these resins, those which are not softened or melted before the thermal condensation are preferred. To be specific, there are, for example, phenol resins, urea resins, melamine resins, alkyd resins, silicone resins, acrylic reactive resins, epoxy-polyamide resins, a mixture of a high molecular weight polyester resin and an isocyanate prepolymer, a mixture of a methacrylate copolymer and a diisocyanate prepolymer, a mixture of polyester polyol and a polyisocyanate, urea-formaldehyde resins, a mixture of a low molecular weight glycol/high molecular weight diol/triphenylmethane-isocyanate, polyamide resins and mixtures thereof.

The magnetic recording layer may be formed by dissolving the above-described composition in an organic solvent and applying the resulting coating solution to the base support. As the organic solvent used upon coating, there can be employed ketones such as acetone, methyl ethyl ketone, methyl isobutyl ketone, cyclohexanone, alcohols such as methanol, ethanol, propanol, butanol, esters such as methyl acetate, ethyl acetate, butyl acetate, propyl acetate, amyl acetate, ethyl lactate, glycol acetate monoethyl ether, ethers; glycol ethers such as glycol dimethyl ether, glycol monoethyl ether, dioxane, aromatic hydrocarbons such as benzene, toluene, xylene, chlorinated hydrocarbons such as methylene chloride, ethylene chloride, carbon tetrachloride, chloroform, trichloroethane and dichlorobenzene. The magnetic recording layer may also be a water-borne formulation or an electron beam curable formulation.

Suitable supports which can be used in the present invention are those having a thickness of 5 to 50  $\mu\text{m}$  preferably 10 to 40 and suitable examples of supports are supports of polyesters such as polyethylene terephthalate; polyolefins such as polypropylene; cellulose derivatives such as cellulose triacetate, cellulose diacetate and polycarbonate.

Whereas the exact scope of the instant invention is set forth in the appended claims, the following specific examples illustrate certain aspects of the present invention and, more particularly, point out methods of evaluating the same. All parts and percentages are by weight unless otherwise specified.

#### Examples:



Low viscosity values are a measure of effective performance and probably indicative of one or more of the following concomitant advantages:

a) higher loading of magnetic iron oxide, (i.e., higher information storage density), b) reduced grinding time, and/or c) reduced surfactant demand.

#### DEFINITIONS

A. Gafac RE—610®; MW 800.


A mixture containing the following components with typical concentrations:



MW ~ 800

Free Phosphoric acid


(11 mole %)



Water

0.5 wt% max

B. *Soya Lecithin* (Central 3F—UB or Centrolex P from Central Soya Corp.).  
A mixture. A phosphatide residue from manufacture of soybean oil.  
A major (~60—70%) component

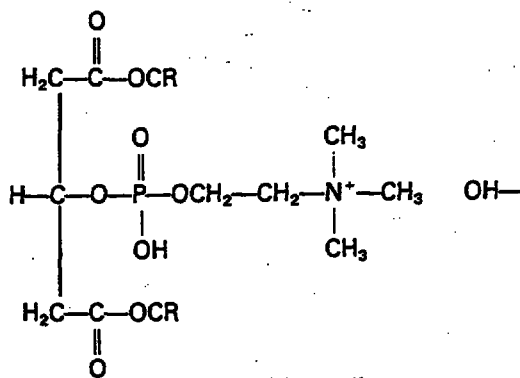


$\beta$ -Phosphatidylcholine

R = typically C<sub>16</sub>—C<sub>18</sub>

Candidate Dispersants

- S—1 — Me(OC<sub>3</sub>H<sub>7</sub>)<sub>27</sub>(OC<sub>2</sub>H<sub>4</sub>)<sub>24</sub>OC<sub>3</sub>H<sub>7</sub>Si(OMe)<sub>3</sub>
- S—2 —  $\gamma$ -Isocyanatotriethoxysilane
- S—3 —  $\gamma$ -Aminopropyltriethoxysilane
- S—4 — CH<sub>3</sub>O(C<sub>2</sub>H<sub>4</sub>O)<sub>12</sub>(CH<sub>2</sub>)<sub>3</sub>Si(OCH<sub>3</sub>)<sub>3</sub>
- S—5 — C<sub>4</sub>H<sub>9</sub>O(C<sub>3</sub>H<sub>6</sub>O)<sub>5</sub>(CH<sub>2</sub>)<sub>3</sub>Si(OCH<sub>3</sub>)<sub>3</sub>
- S—6 — CH<sub>2</sub>CCH<sub>3</sub>COO(CH<sub>2</sub>)<sub>3</sub>Si(OCH<sub>3</sub>)<sub>3</sub>
- S—7 — 1:1 wt blend of S—6 and S—8
- S—8 — CH<sub>3</sub>O(CH<sub>2</sub>CH<sub>2</sub>O)<sub>75</sub>C<sub>3</sub>H<sub>6</sub>Si(OCH<sub>3</sub>)<sub>3</sub>

P-1

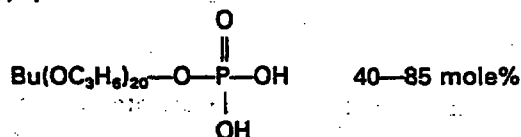




MW ~1,300

Corresponding Diorganic Ester 2—20 mole%  
Free Phosphoric Acid 2—45 mole%


P—2: Composition prepared by phosphorylation of Bu(O<sub>3</sub>C<sub>8</sub>H<sub>13</sub>)—OH

MW ~1040

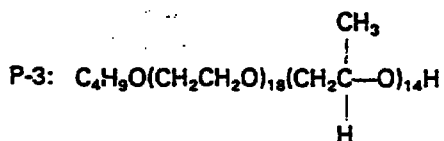

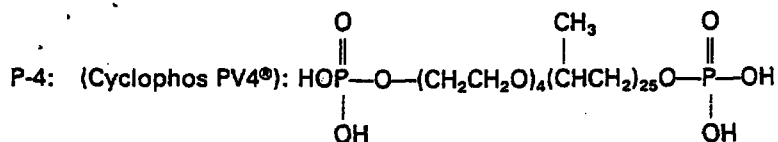

approximately 50 mole percent  $n = 1$   
approximately 50 mole percent  $n = 2$



approximately 50 mole percent  $n = 1$   
approximately 50 mole percent  $n = 2$

The results are attached as follows:

#### PROCEDURE I

##### 25 Preparation of Magnetic Coatings

###### *Wet Grind*

2.06 grams of the dispersant candidate is first dissolved in 32.2 grams of cyclohexanone solvent. To this solution are added 51.4 grams dry magnetic iron oxide and 25.0 grams Polyurethane Solution (15.0 wt% "Estane" 5701F-1® in a cyclohexanone solvent). Initial premixing is done with a hand spatula to wet all ingredients. The resultant slurry is then ground at 3,500 rpm for 30 minutes on an Eiger-Mini-50 Motor Mill®.

###### *Let Down*

To the Wet Grind, 32.0 grams of Polyurethane Solution are slowly added while grinding. Then grinding is continued at 3,500 rpm for additional 30 minutes on the Eiger Mini-50 Motor Mill®.

The final dispersion contains 4.00 wt% dispersant candidate based upon the weight of contained magnetic iron oxide.

| Component             | Final Dispersion |       | Cast Film |       |
|-----------------------|------------------|-------|-----------|-------|
|                       | Wt%              | Vol%  | Wt%       | Vol%  |
| Magnetic Iron Oxide   | 36.03            | 10.41 | 82.9      | 54.5  |
| Polyurethane Binder   | 5.99             | 6.72  | 13.8      | 35.2  |
| Dispersant Candidate  | 1.44             | 1.96  | 3.3       | 10.3  |
| Cyclohexanone Solvent | 56.54            | 80.91 | —         | —     |
|                       | 100.0            | 100.0 | 100.0     | 100.0 |

#### PROCEDURE II

##### Preparation of Cast Films

A 1.27 mm (50 mil) wet film is cast on silicone-coated release paper and air dried for one week. The dried film is stripped from the release paper, cut into test strips and allowed to air dry for an additional week.

#### PROCEDURE III

##### Preparation of Electron Beam Curable Magnetic Coating

###### *Wet Grind*

1.63 grams of the dispersant candidate are first dissolved in 15.00 grams of cyclohexanone solvent. To this solution are added 34.09 grams of dry magnetic iron oxide and 19.44 grams of an electron beam curable polyurethane resin solution (RD 4345-60® from Lord Corp, a medium molecular weight resin as a 58 wt% solution in cyclohexanone). Initial premixing is done with a hand spatula to wet all ingredients. The resultant slurry is then ground at 3500 rpm for 30 minutes on an Eiger-Mini-50 motor mill®.

*Let Down*

To the Wet Grind an additional 29.84 grams of cyclohexanone are slowly added while grinding. Then grinding is continued at 3500 rpm for an additional 30 minutes on the Eiger Mini-50 motor mill®.

The final dispersion contains 4.78 wt% dispersant candidate based on the weight of contained magnetic iron oxide.

| Component                 | Final Formulation |        | Cast Film |        |
|---------------------------|-------------------|--------|-----------|--------|
|                           | Final Dispersion  |        |           |        |
|                           | Wt%               | Vol%   | Wt%       | Vol%   |
| Magnetic Iron Oxide       | 34.09             | 9.77   | 72.53     | 39.84  |
| Polyurethane Resin Solids | 11.28             | 12.56  | 24.00     | 51.20  |
| Dispersant Candidate      | 1.63              | 2.20   | 3.47      | 8.96   |
| Cyclohexanone             | 53.00             | 75.47  | —         | —      |
|                           | 100.00            | 100.00 | 100.00    | 100.00 |

*Types of Magnetic Iron Oxide*

A = Hercules TMOG—642®: High coercive strength (Coercive Force = (650 Oersteds) 51725 A/m); Cobalts Doped  $\gamma$ -Fe<sub>2</sub>O<sub>3</sub>. Acicular particle, length = 0.20  $\mu$ m aspect ratio = 8—10.

B = Pfizer "Pferrox" 228HC®,  $\gamma$ -Fe<sub>2</sub>O<sub>3</sub> with no cobalt dopant.

Coercive force 27852 A/m (350 oersteds);

Specific Magnetization 74 emu/g

Average length 0.35  $\mu$ m;

Average width 0.06  $\mu$ m;

Acicularity Ratio 6;

Powder Density 0.8 g/cm<sup>3</sup>;

Particle Density 4.7 g/cm<sup>3</sup>, pH, 3.0 g;

Oil Absorption 50 ml/100 g;

Specific Surface Area 24 m<sup>2</sup>/g.

*Polymeric Binder*

"Estane" 5701F—1® is a block copolymer having a glass transition temperature of -28°C. It consists of 60% soft block and 40% hard block. The soft block is ~2,000 MW polyester of Adipic Acid and 1,4-Butanediol. The hard block is ~1,500 MW polyurethane prepared from 4,4'-Diisocyanate Diphenyl Methane and 1,4-Butanediol.

*Method of Introducing Dispersant*

C = Integral Addition, i.e., dissolving of dispersing agent in cyclohexanone solvent prior to addition of untreated magnetic iron oxide and polyurethane binder. Formulation detail in Procedure I.

D = Pretreatment of dispersing agent on magnetic iron oxide in toluene slurry. Pretreated oxide is vacuum dried for 2 hours at 120°C. In preparing subsequent dispersion (Procedure I) magnetic iron oxide content corrected for weight of dispersing agent pretreatment.

E = Pretreatment of dispersing agent on magnetic iron oxide in water slurry. Same drying conditions and dispersion preparation considerations as for (D).

TABLE I — Viscosity values achieved with various dispersing agents made from Procedure I obtained at 25°C using a Wells-Brookfield cone and plate viscometer. Shear thinning index is viscosity at 1 reciprocal second divided by viscosity at 200 s<sup>-1</sup> (reciprocal seconds). The thixotropic degree represents the hysteresis of the rheogram.

TABLE II — Cast film properties achieved on films made from with various dispersing agents made from Procedure I. The films are made by Procedure II.

TABLE III — Viscosity values achieved with various dispersing agents made from Procedure III.

TABLE I

| Example | Candidate                                | Candidate Dispersant<br>Wt% based<br>on magnetic<br>oxide | Method of<br>introducing<br>dispersant | Type of<br>Magnetic<br>iron oxide<br>used | Dispersion Rheology                               |                                                   |                            |                              |
|---------|------------------------------------------|-----------------------------------------------------------|----------------------------------------|-------------------------------------------|---------------------------------------------------|---------------------------------------------------|----------------------------|------------------------------|
|         |                                          |                                                           |                                        |                                           | vis.<br>mm <sup>2</sup> /s<br>1.0 s <sup>-1</sup> | vis.<br>mm <sup>2</sup> /s<br>200 s <sup>-1</sup> | Shear<br>thinning<br>index | Degree of<br>Thixotropy<br>% |
| A       | None                                     | —                                                         | —                                      | A                                         | 113,000                                           | 3,650                                             | 31.0                       | 45                           |
| B       | None                                     | —                                                         | —                                      | B                                         | 61,400                                            | 1,400                                             | 42.6                       | 10                           |
| 1       | S—1 (2.0%)<br>P—1 (2.0%)                 | 4.0                                                       | C                                      | A                                         | 15,700                                            | 950                                               | 16.5                       | 17                           |
| 2       | S—1 (2.0%)<br>P—1 (2.0%)                 | 4.0                                                       | D                                      | A                                         | 18,900                                            | 940                                               | 20.0                       | 17                           |
| 3       | S—1 (2.0%)<br>P—1 (2.0%)                 | 4.0                                                       | E                                      | A                                         | 14,200                                            | 660                                               | 21.4                       | 22                           |
| 4       | S—1 (2.0%)<br>P—1 (2.0%)                 | 4.0                                                       | C                                      | B                                         | 9,440                                             | 440                                               | 21.4                       | 22                           |
| C       | "Gafac" <sup>®</sup><br>RE—610           | 4.0                                                       | C                                      | A                                         | 44,000                                            | 1,460                                             | 30.1                       | 11                           |
| D       | "Gafac" <sup>®</sup><br>RE—610           | 4.0                                                       | C                                      | B                                         | 20,500                                            | 870                                               | 23.6                       | 31                           |
| E       | P—1                                      | 4.0                                                       | C                                      | A                                         | 39,200                                            | 1,270                                             | 30.9                       | 20                           |
| F       | S—1                                      | 4.0                                                       | C                                      | A                                         | 55,000                                            | 2,340                                             | 23.5                       | —                            |
| 5       | P—1 (2.0%)<br>S—2 (2.0%)                 | 4.0                                                       | C                                      | A                                         | 31,400                                            | 1,770                                             | 17.7                       | 80                           |
| G       | P—1 (2.0%)<br>S—3 (1.0%)<br>P—3 (1.0%)   | 4.0                                                       | C                                      | A                                         | 23,600                                            | 1,720                                             | 13.7                       | 93                           |
| 6       | P—1 (2.0%)<br>S—4 (2.0%)                 | 4.0                                                       | C                                      | A                                         | 34,600                                            | 1,450                                             | 23.9                       | 14                           |
| 7       | P—1 (2.0%)<br>S—5 (2.0%)                 | 4.0                                                       | C                                      | A                                         | 56,600                                            | 2,330                                             | 24.3                       | 25                           |
| H       | Soya<br>Lecithin<br>(2.0%)<br>S—1 (2.0%) | 4.0                                                       | C                                      | A                                         | 70,800                                            | 2,850                                             | 25.0                       | 56                           |
| I       | Gafac<br>RE—610<br>(2.0%)<br>S—1 (2.0%)  | 4.0                                                       | C                                      | A                                         | 55,100                                            | 1,860                                             | 29.6                       | 11                           |
| 8       | P—2 (2.0%)<br>S—1 (2.0%)                 | 4.0                                                       | C                                      | A                                         | 56,500                                            | 2,220                                             | 25.4                       | 11                           |
| 9       | P—2 (2.0%)<br>S—1 (2.0%)                 | 4.0                                                       | C                                      | A                                         | 70,000                                            | 2,320                                             | 30.5                       | 4                            |
| J       | "Cyclophos"<br>(2.0%)<br>S—1 (2.0%)      | 4.0                                                       | C                                      | A                                         | 31,500                                            | 1,420                                             | 22.2                       | 50                           |

EP 0 176 983 B1

TABLE I (continued)

| Example | Candidate Dispersant                                     |                             | Method of introducing dispersant | Type of Magnetic iron oxide used | Dispersion Rheology                         |                                             |                      |                        |
|---------|----------------------------------------------------------|-----------------------------|----------------------------------|----------------------------------|---------------------------------------------|---------------------------------------------|----------------------|------------------------|
|         | Candidate                                                | Wt% based on magnetic oxide |                                  |                                  | vis. mm <sup>2</sup> /s 1.0 s <sup>-1</sup> | vis. mm <sup>2</sup> /s 200 s <sup>-1</sup> | Shear thinning index | Degree of Thixotropy % |
| 10      | S—1 (1.0%)<br>P—1 (1.0%)<br>"Gafac"<br>RE—610®<br>(2.0%) | 4.0                         | C                                | A                                | 17,300                                      | 630                                         | 27.5                 | 27                     |
| K       | S—2                                                      | 4.0                         | C                                | A                                | 42,400                                      | 1,990                                       | 21.3                 | 59                     |
| 11      | S—3 (2.0%)<br>P—3 (2.0%)                                 | 4.0                         | C                                | A                                | 44,000                                      | 1,750                                       | 25.1                 | 21                     |
| L       | Soya<br>Lecithin                                         | 4.0                         | C                                | A                                | 40,900                                      | 1,670                                       | 24.5                 | 27                     |
| 12      | 1.0% P—1<br>3.0% S—1                                     | 4.0                         | C                                | A                                | 22,000                                      | 1,650                                       | 13.3                 | 85                     |
| 13      | 2.0% P—1<br>2.0% S—1                                     | 4.0                         | C                                | A                                | 15,700                                      | 771                                         | 20.4                 | 50                     |
| 14      | 3.0% P—1<br>1.0% S—1                                     | 4.0                         | C                                | A                                | 31,500                                      | 1,000                                       | 31.5                 | 10                     |
| 15      | 3.0% S—2<br>1.0% P—1                                     | 4.0                         | C                                | A                                | 18,900                                      | 760                                         | 24.9                 | 67                     |
| 16      | 2.0% S—2<br>2.0% P—1                                     | 4.0                         | C                                | A                                | 26,700                                      | 849                                         | 32                   | 12                     |
| 17      | 2.0% S—2<br>2.0% P—1                                     | 4.0                         | C                                | A                                | 31,400                                      | 1,770                                       | 17.7                 | —                      |
| 18      | 1.0% S—2<br>3.0% P—1                                     | 4.0                         | C                                | A                                | 39,300                                      | 1,340                                       | 29.4                 | 40                     |
| V       | P—5                                                      | 4.0                         | C                                | A                                | 26,700                                      | 1,420                                       | 20.2                 | 59                     |
| W       | P—6                                                      | 4.0                         | C                                | A                                | 26,700                                      | 1,380                                       | 19.4                 | 35                     |
| 22      | 2.0% S—1<br>2.0% P—5                                     | 4.0                         | C                                | A                                | 15,700                                      | 600                                         | 23.6                 | 20                     |
| 23      | 2.0% S—1<br>2.0% P—6                                     | 4.0                         | C                                | A                                | 25,200                                      | 1,090                                       | 23.2                 | 25                     |

TABLE II


| Example | Candidate Dispersant                                     |                             | Method of introducing dispersant | Type of Magnetic iron oxide used | Cast Film Properties |                                          |
|---------|----------------------------------------------------------|-----------------------------|----------------------------------|----------------------------------|----------------------|------------------------------------------|
|         | Candidate                                                | Wt% based on magnetic oxide |                                  |                                  | Gloss at 60°         | Tensile Strength (psi) N/cm <sup>2</sup> |
| 1       | S-1 (2.0%)<br>P-1 (2.0%)                                 | 4.0                         | C                                | A                                | 47.1                 | (799) 551                                |
| 2       | S-1 (2.0%)<br>P-1 (2.0%)                                 | 4.0                         | D                                | A                                |                      |                                          |
| 3       | S-1 (2.0%)<br>P-1 (2.0%)                                 | 4.0                         | E                                | A                                |                      |                                          |
| 4       | S-1 (2.0%)<br>P-1 (2.0%)                                 | 4.0                         | C                                | B                                |                      |                                          |
| C       | "Gafac"<br>RE-610                                        | 4.0                         | C                                | A                                | 81.7                 | (553) 382                                |
| E       | P-1                                                      | 4.0                         | C                                | A                                | 29.3                 | (445) 307                                |
| F       | S-1                                                      | 4.0                         | C                                | A                                | 24.7                 | —                                        |
| 5       | P-1 (2.0%)<br>S-2 (2.0%)                                 | 4.0                         | C                                | A                                | 11.9                 | (571) 394                                |
| G       | P-1 (2.0%)<br>S-3 (1.0%)<br>P-3 (1.0%)                   | 4.0                         | C                                | A                                | 33.0                 | —                                        |
| I       | GafacR-610®<br>(2.0%)<br>S-1 (2.0%)                      | 4.0                         | C                                | A                                | 63                   | (896) 618                                |
| 8       | P-2 (2.0)<br>S-1 (2.0%)                                  | 4.0                         | C                                | A                                | 61.4                 | —                                        |
| 9       | P-2 (2.0%)<br>S-1 (2.0%)                                 | 4.0                         | C                                | A                                | 48.5                 | —                                        |
| J       | "Cyclophos"®<br>(2.0%)<br>S-1 (2.0%)                     | 4.0                         | C                                | A                                | 15.6                 | —                                        |
| 10      | S-1 (1.0%)<br>P-1 (1.0%)<br>"Gafac"<br>RE-610®<br>(2.0%) | 4.0                         | C                                | A                                | 31.6                 | (531) <366                               |
| K       | S-2                                                      | 4.0                         | C                                | A                                | 13.6                 | (737) 509                                |
| 11      | P-3 (2.0%)<br>S-3 (2.0%)                                 | 4.0                         | C                                | A                                | 40.3                 | (593) 401                                |

TABLE III

| Example | Candidate | Candidate Dispersant                     |                             | Method of introducing dispersant | Type of Magnetic iron oxide used | Dispersion Rheology                         |                                             |                      |                        |
|---------|-----------|------------------------------------------|-----------------------------|----------------------------------|----------------------------------|---------------------------------------------|---------------------------------------------|----------------------|------------------------|
|         |           | Candidate                                | Wt% based on magnetic oxide |                                  |                                  | vis. mm <sup>2</sup> /s 1.0 s <sup>-1</sup> | vis. mm <sup>2</sup> /s 200 s <sup>-1</sup> | Shear thinning index | Degree of Thixotropy % |
| 5       |           |                                          |                             |                                  |                                  |                                             |                                             |                      |                        |
| 10      | M         | None                                     | —                           | —                                | A                                | 73,900                                      | 417                                         | 177                  | —                      |
|         | N         | "Centrolex P" Lecithin from Control Soya | 4.78                        | C                                | A                                | 15,700                                      | 330                                         | 47.6                 | 60                     |
| 15      | 19        | S—1 (2.39)<br>P—1 (2.39)                 | 4.78                        | C                                | A                                | 4,720                                       | 181                                         | 26.1                 | 66                     |
| 20      | O         | "Gafac RE610"                            | 4.78                        | C                                | A                                | 7,865                                       | 197                                         | 40.0                 | 60                     |
|         | P         | P—1                                      | 4.78                        | C                                | A                                | 7,865                                       | 189                                         | 41.7                 | 40                     |
|         | Q         | S—2                                      | 4.78                        | C                                | A                                | 12,600                                      | 236                                         | 53.4                 | 50                     |
| 25      | R         | S—1                                      | 4.78                        | C                                | A                                | 14,200                                      | 354                                         | 40.1                 | 33                     |
|         | S         | S—6                                      | 4.78                        | C                                | A                                | 26,700                                      | 393                                         | 68.0                 | 29                     |
| 30      | T         | S—3                                      | 4.78                        | C                                | A                                | 28,300                                      | 684                                         | 41.4                 | 161                    |
|         | U         | S—7                                      | 4.78                        | C                                | A                                | 31,500                                      | 629                                         | 50.0                 | 30                     |
| 35      | 20        | S—2 (2.39)<br>P—1 (2.39)                 | 4.78                        | C                                | A                                | 9,439                                       | 244                                         | 38.7                 | 33                     |
|         | 21        | S—2 (3.59)<br>P—1 (1.19)                 | 4.78                        | C                                | A                                | 15,731                                      | 346                                         | 45.5                 | 30                     |

## 40 Claims


1. A dispersing agent comprising  
(a) a silylated polyether of the general formula:



50

where R<sup>1</sup> is individually a hydrogen atom, an alkyl group having from 1 to 12 carbon atoms, an alkoxy alkyl group having from 2 to 12 carbon atoms, or an acyl group having from 6 to 12 carbon atoms; R<sup>2</sup> is individually a hydrogen atom, an alkyl group having from 1 to 18 carbon atoms or an aryl group having from 6 to 18 carbon atoms; R<sup>3</sup> is individually a hydrogen atom, an alkyl group having from 1 to 12 carbon atoms, an aryl group having from 6 to 18 carbon atoms or an aryl alkyl group having from 7 to 18 carbon atoms; R<sup>4</sup> is individually an alkyl group having 1 to 4 carbon atoms; the sum of x + y has a value of from 2 to 100, z is 1, 2 or 3; W is 0 to 6; m is 1, 2 or 3; and a is 0 or 1; or an isocyanato silane of the general formula:

60



where R<sup>6</sup> is individually an alkyl group having 1 to 4 carbon atoms; R<sup>7</sup> is individually a hydrogen atom, an alkyl group having from 1 to 12 carbon atoms, an alkoxy alkyl group having from 2 to 12 carbon atoms or an




TABLE III

| 5  | Example | Candidate Dispersant                     |                             | Method of introducing dispersant | Type of Magnetic iron oxide used | vis. mm <sup>2</sup> /s 1.0 s <sup>-1</sup> | Dispersion Rheology                         |                      | Degree of Thixotropy % |
|----|---------|------------------------------------------|-----------------------------|----------------------------------|----------------------------------|---------------------------------------------|---------------------------------------------|----------------------|------------------------|
|    |         | Candidate                                | Wt% based on magnetic oxide |                                  |                                  |                                             | vis. mm <sup>2</sup> /s 200 s <sup>-1</sup> | Shear thinning index |                        |
| 10 | M       | None                                     | —                           | —                                | A                                | 73,900                                      | 417                                         | 177                  | —                      |
|    | N       | "Centrolex P" Lecithin from Control Soya | 4.78                        | C                                | A                                | 15,700                                      | 330                                         | 47.6                 | 60                     |
| 15 | 19      | S—1 (2.39)<br>P—1 (2.39)                 | 4.78                        | C                                | A                                | 4,720                                       | 181                                         | 26.1                 | 66                     |
|    | O       | "Gafac RE610"®                           | 4.78                        | C                                | A                                | 7,865                                       | 197                                         | 40.0                 | 60                     |
| 20 | P       | P—1                                      | 4.78                        | C                                | A                                | 7,865                                       | 189                                         | 41.7                 | 40                     |
|    | Q       | S—2                                      | 4.78                        | C                                | A                                | 12,600                                      | 236                                         | 53.4                 | 50                     |
| 25 | R       | S—1                                      | 4.78                        | C                                | A                                | 14,200                                      | 354                                         | 40.1                 | 33                     |
|    | S       | S—6                                      | 4.78                        | C                                | A                                | 26,700                                      | 393                                         | 68.0                 | 29                     |
| 30 | T       | S—3                                      | 4.78                        | C                                | A                                | 28,300                                      | 684                                         | 41.4                 | 161                    |
|    | U       | S—7                                      | 4.78                        | C                                | A                                | 31,500                                      | 629                                         | 50.0                 | 30                     |
| 35 | 20      | S—2 (2.39)<br>P—1 (2.39)                 | 4.78                        | C                                | A                                | 9,439                                       | 244                                         | 38.7                 | 33                     |
|    | 21      | S—2 (3.59)<br>P—1 (1.19)                 | 4.78                        | C                                | A                                | 15,731                                      | 346                                         | 45.5                 | 30                     |

## 40 Claims


1. A dispersing agent comprising  
(a) a silylated polyether of the general formula:



50

where R<sup>1</sup> is individually a hydrogen atom, an alkyl group having from 1 to 12 carbon atoms, an alkoxy alkyl group having from 2 to 12 carbon atoms, or an acyl group having from 6 to 12 carbon atoms; R<sup>2</sup> is individually a hydrogen atom, an alkyl group having from 1 to 18 carbon atoms or an aryl group having from 6 to 18 carbon atoms; R<sup>3</sup> is individually a hydrogen atom, an alkyl group having from 1 to 12 carbon atoms, an aryl group having from 6 to 18 carbon atoms or an aryl alkyl group having from 7 to 18 carbon atoms; R<sup>4</sup> is individually an alkyl group having 1 to 4 carbon atoms; the sum of x + y has a value of from 2 to 100, z is 1, 2 or 3; W is 0 to 6; m is 1, 2 or 3; and a is 0 or 1; or an isocyanato silane of the general formula:

60




where R<sup>6</sup> is individually an alkyl group having 1 to 4 carbon atoms; R<sup>7</sup> is individually a hydrogen atom, an alkyl group having from 1 to 12 carbon atoms, an alkoxy alkyl group having from 2 to 12 carbon atoms or an




21

## EP 0 176 983 B1

acyl group having from 6 to 12 carbon atoms; b is 0, 1, 2 or 3; and R<sup>5</sup> is an alkylene, arylene or aralkylene group having from 1 to 18 carbon atoms or R<sup>5</sup>NCO is a group of the formula:

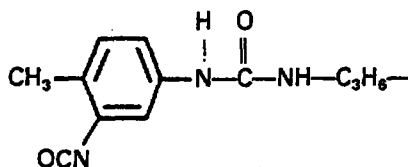

and (b) a organo phosphate of the general formula:

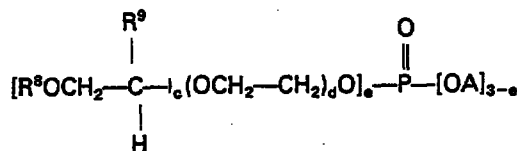


where R<sup>8</sup> is a hydrogen atom or an alkyl group containing from 1 to 20 carbon atoms; R<sup>9</sup> is a hydrogen atom, an alkyl group containing from 1 to 4 carbon atoms, an aryl group containing from 6 to 18 carbon atoms; or an alkylaryl group containing from 7 to 17 carbon atoms; the sum of c + d has a value of from 0 to 100, e is 1 or 2; and A is a hydrogen, sodium, potassium or lithium atom or an NH<sub>4</sub> group; where the ratio of silane to phosphate is 10:90 to 99:1 when the silane is a silylated polyether and 35:65 to 99:1 when the silane is an isocyanato silane.

2. The dispersing agent of claim 1 wherein the ratio of silane to phosphate is 25:75 to 75:25 when the silylated polyether is employed and 50:50 to 90:10 when the isocyanato silane is employed.

3. The dispersing agent of claim 1 or 2 where R<sup>1</sup> and R<sup>3</sup> are alkyl groups, R<sup>2</sup> is hydrogen, z = 1, w = 3 and a = 0.



4. The dispersing agent of claim 1 or 2 where R<sup>7</sup> is an alkyl group, b = 0 and R<sup>5</sup> is an alkylene group.

5. The dispersing agent of claim 3 wherein the component a) is



6. The dispersing agent of claim 4 wherein the component a) is isocyanatotriethoxysilane.

7. The dispersing agent of claims 1 to 6 wherein the component b) is




wherein n = 1 in about 50 mole percent of the ester and n = 2 in the remainder.

8. The use of the dispersing agent of claims 1 to 7 for dispersing ferromagnetic particles employed in magnetic coatings.

### Patentansprüche

1. Dispersionsmittel, enthaltend

(a) einen silylierten Polyether der allgemeinen Formel:




worin R<sup>1</sup> ein Wasserstoffatom, eine Alkylgruppe mit 1 bis 12 Kohlenstoffatomen, eine Alkoxygruppe mit 2


bis 12 Kohlenstoffatomen oder eine Acylgruppe mit 6 bis 12 Kohlenstoffatomen; R<sup>2</sup> ein Wasserstoffatom, eine Alkylgruppe mit 1 bis 18 Kohlenstoffatomen oder eine Arylgruppe mit 6 bis 18 Kohlenstoffatomen; R<sup>3</sup> ein Wasserstoffatom, eine Alkylgruppe mit 1 bis 12 Kohlenstoffatomen, eine Arylgruppe mit 6 bis 18 Kohlenstoffatomen oder eine Alkylgruppe mit 7 bis 18 Kohlenstoffatomen und R<sup>4</sup> eine Alkylgruppe mit 1 bis 4 Kohlenstoffatomen bedeutet, wobei die Summe x + y 2 bis 100; der Index z 1, 2 oder 3; w 0 bis 6; m 1, 2 oder 3 und a 0 oder 1 ist, oder ein Isocyanatosilan der allgemeinen Formel:



worin R<sup>6</sup> eine Alkylgruppe mit 1 bis 4 Kohlenstoffatomen; R<sup>7</sup> ein Wasserstoffatom, eine Alkylgruppe mit 1 bis 12 Kohlenstoffatomen, eine Alkoxyalkylgruppe mit 2 bis 12 Kohlenstoffatomen oder eine Acylgruppe mit 6 bis 12 Kohlenstoffatomen ist; b 0, 1, 2 oder 3 sein kann und R<sup>5</sup> eine Alkyl-, Aryl- oder Alkylengruppe mit 1 bis 18 Kohlenstoffatomen bedeutet oder R<sup>5</sup>NCO eine Gruppe der Formel:

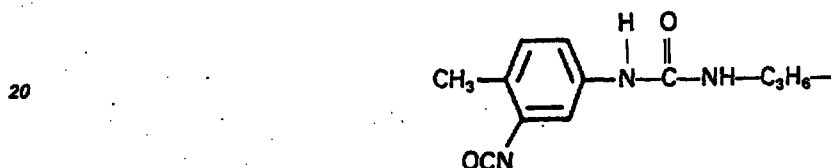

ist, und  
(b) ein Organophosphat der allgemeinen Formel:

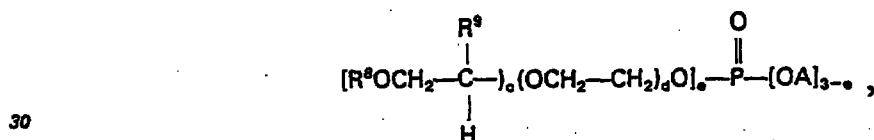


worin R<sup>8</sup> ein Wasserstoffatom oder eine Alkylgruppe mit 1 bis 20 Kohlenstoffatomen; R<sup>9</sup> eine Wasserstoffatom, eine Alkylgruppe mit 1 bis 4 Kohlenstoffatomen, eine Arylgruppe mit 6 bis 18 Kohlenstoffatomen oder eine Alkylgruppe mit 7 bis 17 Kohlenstoffatomen ist und die Summe des Indices c + d 0 bis 100 sein kann; e 1 oder 2 ist und A ein Wasserstoffatom, Natrium, Kalium oder Lithium oder eine Ammoniumgruppe bedeutet und wobei das Verhältnis Silan:Phosphat 10:90 bis 99:1 sein kann, wenn das Silan ein silylierter Polyether ist, und 35:65 bis 99:1 beträgt, wenn das Silan ein Isocyanatosilan ist.

2. Dispersionsmittel nach Anspruch 1, in dem das Verhältnis Silan:Phosphat 25:75 bis 75:25 sein kann, wenn der silylierte Polyether angewandt wird, und 50:50 bis 90:10, wenn das Isocyanatosilan angewandt wird.

3. Dispersionsmittel nach Anspruch 1 oder 2, worin R<sup>1</sup> und R<sup>3</sup> Alkylgruppen und R ein Wasserstoffatom sind, z = 1, w = 3 und a = 0.


4. Dispersionsmittel nach Anspruch 1 oder 2, worin R<sup>7</sup> eine Alkylgruppe, R<sup>5</sup> eine Alkylengruppe und b 0 ist.

5. Dispersionsmittel nach Anspruch 3, in welchem die Komponente (a) eine der folgenden Verbindungen ist:

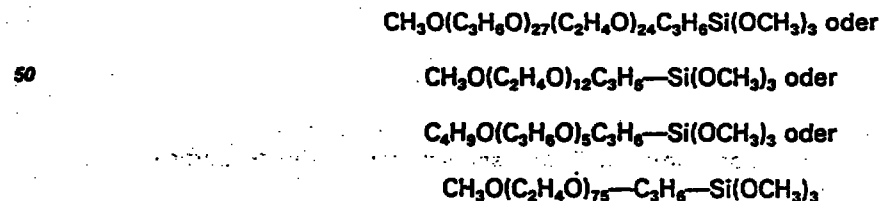

6. Dispersionsmittel nach Anspruch 4, worin die Komponente (a) ein Isocyanatotriethoxysilan ist.

7. Dispersionsmittel nach Anspruch 1 bis 6, bei dem die Komponente (b)

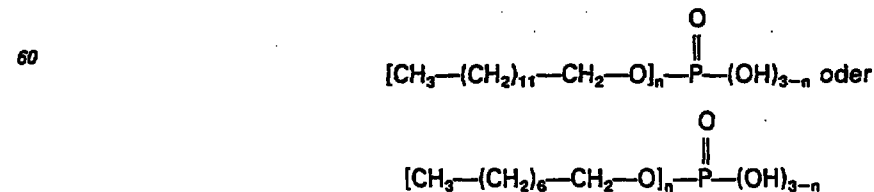




ist, worin  $n = 1$  in etwa 50 mol.-% des Esters und  $n = 2$  in dem Rest ist.

8. Verwendung des Dispersionsmittels nach Anspruch 1 bis 7 zum Dispergieren ferromagnetischer Teilchen in Magnetschichten.

## 5 Revendications


1. Agent dispersant comprenant (a) un polyéther silylé de formule générale:




dans laquelle  $R^1$  représente, individuellement, un atome d'hydrogène, un groupe alkyle ayant 1 à 12 atomes de carbone, un groupe alkoxyalkyle ayant 2 à 12 atomes de carbone ou un groupe acyle ayant 6 à 12 atomes de carbone;  $R^2$  représente, individuellement, un atome d'hydrogène, un groupe alkyle ayant 1 à 18 atomes de carbone ou un groupe aryle ayant 6 à 18 atomes de carbone;  $R^3$  représente, individuellement, un atome d'hydrogène, un groupe alkyle ayant 1 à 12 atomes de carbone, un groupe aryle ayant 6 à 18 atomes de carbone ou un groupe arylalkyle ayant 7 à 18 atomes de carbone;  $R^4$  représente, individuellement, un groupe alkyle ayant 1 à 4 atomes de carbone; la somme  $x + y$  a une valeur de 2 à 100;  $z$  est égal à 1, 2 ou 3;  $w$  a une valeur de 0 à 6;  $m$  est égal à 1, 2 ou 3; et  $a$  est égal à 0 ou 1; et/ou un isocyanatosilane de formule générale:



dans laquelle  $R^6$  représente, individuellement, un groupe alkyle ayant 1 à 4 atomes de carbone;  $R^7$  représente, individuellement, un atome d'hydrogène, un groupe alkyle ayant 1 à 12 atomes de carbone, un groupe alkoxyalkyle ayant 2 à 12 atomes de carbone ou un groupe acyle ayant 6 à 12 atomes de carbone;  $b$  a la valeur 0, 1, 2 ou 3; et  $R^5$  est un groupe alkylène, arylène ou aralkylène ayant 1 à 18 atomes de carbone, ou bien  $R^5NCO$  est un groupe de formule:

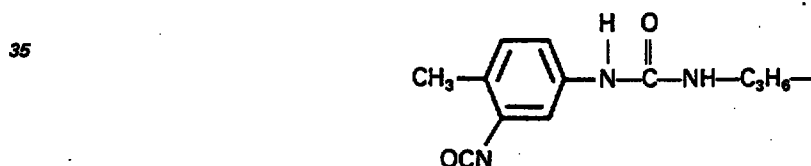

et (b) un phosphate organique de formule générale:

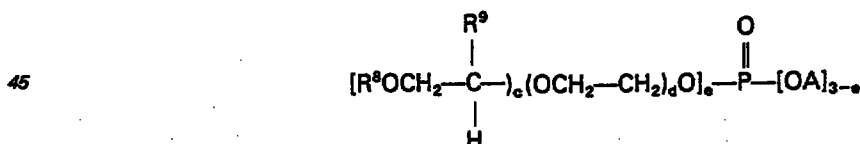

dans laquelle  $R^8$  est un atome d'hydrogène ou un groupe alkyle contenant 1 à 20 atomes de carbone;  $R^9$  est un atome d'hydrogène, un groupe alkyle contenant 1 à 4 atomes de carbone, un groupe aryle contenant 6 à 18 atomes de carbone; ou un groupe alkylaryle contenant 7 à 17 atomes de carbone; la somme  $c + d$  a une valeur de 0 à 100;  $e$  a la valeur 1 ou 2; et  $A$  est un atome d'hydrogène, de sodium, de potassium ou de lithium ou un groupe  $NH_4$ ; le rapport du silane au phosphate a une valeur de 10:90 à 99:1 lorsque le silane est un polyéther silylé et une valeur de 35:65 à 99:1 lorsque le silane est un isocyanatosilane.

2. Agent dispersant suivant la revendication 1, dans lequel le rapport du silane au phosphate a une valeur de 25:75 à 75:25 lorsque le polyéther silylé est utilisé et une valeur de 50:50 à 90:10 lorsque l'isocyanatosilane est utilisé.

3. Agent dispersant suivant la revendication 1 ou 2, dans lequel  $R^1$  et  $R^3$  sont des groupes alkyle,  $R^2$  est l'hydrogène,  $z$  est égal à 1,  $w$  est égal à 3 et  $a$  est égal à 0.



4. Agent dispersant suivant la revendication 1 ou 2, dans lequel  $R^7$  est un groupe alkyle,  $b$  est égal à 0 et  $R^5$  est un groupe alkylène.



24



# EP 0 176 983 B1

5. Agent dispersant suivant la revendication 3, dans lequel le composant a) est



6. Agent dispersant suivant la revendication 4, dans lequel le composant a) est l'isocyanatotriéthoxy silane.

7. Agent dispersant suivant les revendications 1 à 6, dans lequel le composant b) est



où  $n$  est égal à 1 dans environ 50 moles % de l'ester et  $n$  est égal à 2 dans le reste.

8. Utilisation de l'agent dispersant suivant les revendications 1 à 7 pour disperser des particules ferromagnétiques utilisées dans des revêtements magnétiques.