

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 June 2009 (18.06.2009)

PCT

(10) International Publication Number  
**WO 2009/074718 A1**

(51) International Patent Classification:  
**G02B 7/00** (2006.01)

(21) International Application Number:  
PCT/FI2008/050725

(22) International Filing Date:  
11 December 2008 (11.12.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
20070971 12 December 2007 (12.12.2007) FI  
20080053 22 January 2008 (22.01.2008) FI

(71) Applicant (for all designated States except US): **WALLAC OY** [FI/FI]; PO Box 10, FI-20101 Turku (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SARMAALA, Jarkko** [FI/FI]; Amiraalistonkatu 5 C 7, FI-20100 Turku (FI).

(74) Agent: **BERGGREN OY AB**; Antinkatu 3 C, FI-00100 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

(54) Title: DEVICE AND METHOD FOR ADJUSTING A POSITION OF AN OPTICAL COMPONENT

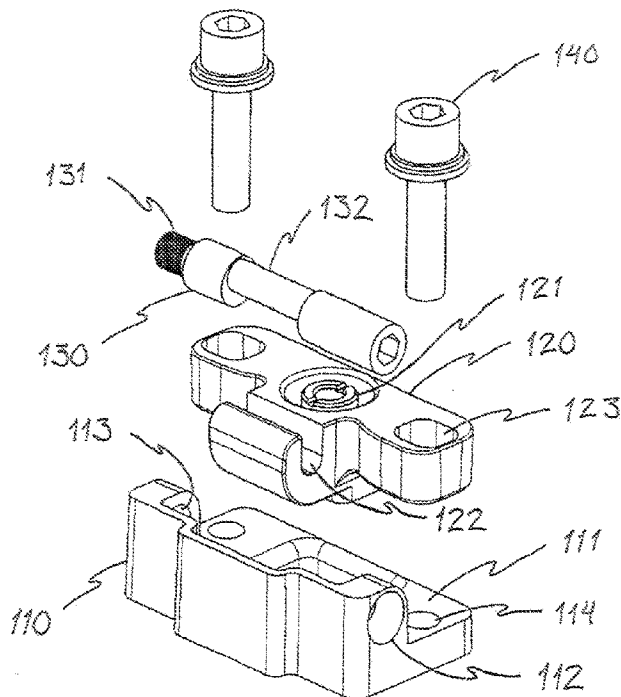


FIG. 2

(57) Abstract: The present invention provides a device (100) for adjusting a position of an optical component in two directions. The device comprises a first member (110) having a flat sliding surface (111), and a second member (120) arranged to be movable relative to the first member in contact with said sliding surface. The optical component can be attached to the second member. The device also comprises an elongated third member (130) arranged in an operational connection with the first and the second member so that the second member is movable relative to the first member in a direction of a rotation axis of the third member when the third member is being moved in the direction of its rotation axis. The rotation axis is arranged to be substantially parallel to the sliding surface of the first member. The third member comprises an eccentric part (132) which is eccentric in relation to the rotation axis of the third member. The eccentric part is arranged in an operational connection with the second member so that the second member is movable relative to the first member in a direction perpendicular to said rotation axis when the third member is being rotated around its rotation axis. The invention also provides a method for adjusting a position of an optical component in two directions.