

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 March 2005 (24.03.2005)

PCT

(10) International Publication Number
WO 2005/027079 A1

(51) International Patent Classification⁷: **G09F 3/03**, E05B 65/14, B65D 90/00, 88/12

(21) International Application Number:
PCT/IB2004/001957

(22) International Filing Date: 14 June 2004 (14.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003/7214 15 September 2003 (15.09.2003) ZA
2004/2317 24 March 2004 (24.03.2004) ZA

(71) Applicant and

(72) Inventor: **BROWN, Andrew, Gerald, Lynn** [ZA/ZA]; 27 Savell Avenue, Glenashley, 4051 Durban (ZA).


(74) Agent: **ROTTEVEEL, Martin**; Adams & Adams, Private Bag 16, 7 Nollsworth Crescent, Nollsworth, La Lucia Ridge Office Estate, 4320 Umhlanga (ZA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A SEAL

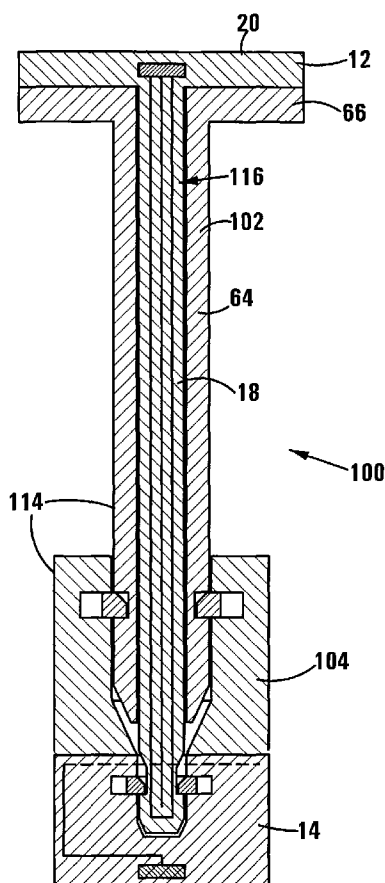

(57) Abstract: This invention relates to a seal for sealing a freight container. The seal includes, in its in-use configuration, a shaft (18) and heads (20) on opposite ends thereof. It includes also an electronic circuit (40) including a radio frequency identification (RFID) transmitter (42) and sensing means (44, 46) for sensing severance of the shaft (18). Severance of the shaft (18), if sensed by the sensing means (44, 46), is detectable by interrogation of the RFID transmitter (42) via a compatible interrogation device. A basic embodiment of the seal comprises parts made mostly of a non-conductive, vulnerable material. Should operational requirements so dictate, additional parts are provided for effectively, in the in-use configuration of the seal, reinforcing the vulnerable parts to yield a tamper resistant seal which still may be interrogated to determine integrity of its shaft. Other embodiments of the seal permit also interrogation to determine the integrity of another part of the seal.



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.