

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 July 2004 (22.07.2004)

PCT

(10) International Publication Number
WO 2004/061357 A3

(51) International Patent Classification⁷: **F16M 7/00**

(21) International Application Number:

PCT/NL2004/000002

(22) International Filing Date: 6 January 2004 (06.01.2004)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:

1022310	6 January 2003 (06.01.2003)	NL
1022308	6 January 2003 (06.01.2003)	NL

(71) Applicant (for all designated States except US): **MA-CHINE SUPPORT B.V.** [NL/NL]; Kaartenmakersstraat 7, NL-2984 CB Ridderkerk (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **VERMEULEN, Rene** [NL/NL]; Anke Servaesstraat 1, NL-3207 HM Spijkenisse (NL).

(74) Agent: **VAN WESTENBRUGGE, Andries et al.**; Nederlandsch Octrooibureau, Scheveningseweg 82, P.O. Box 29720, NL-2502 LS The Hague (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: ADJUSTABLE FOOT FOR SETTING UP EQUIPMENT IN ALIGNMENT

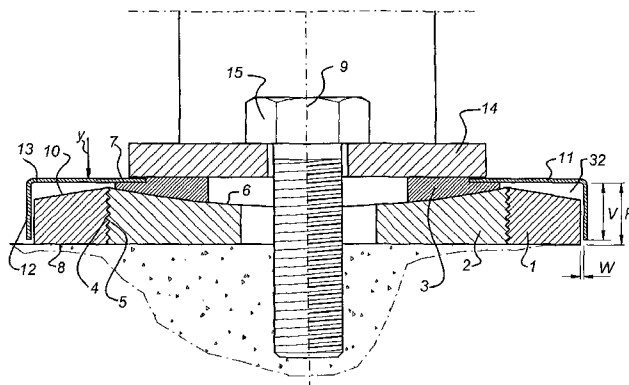

(57) Abstract: The adjustable foot comprises an annular element (1) provided with an axial bore with internal screw thread (4). The adjustable foot furthermore comprises a shaft element (2) provided with external screw thread (5) matching the internal screw thread (4). When screwed into the bore, this shaft element (2) can be adjusted in the axial direction (9) with respect to the annular element (1) by turning with respect to the annular element (1). The adjustable foot furthermore comprises a support part (6), provided on the annular element (1) or shaft element (2) as well as a washer (3). The washer (3) and the support part (6) are each provided with a convex respectively concave surface (66) having essentially the same radius of curvature (R), such that the angle of the washer (3) with respect to the support part (6) can be adjusted. According to the invention the top surface (10) of the annular element (1) is made to slope downwards in the radially outward direction. According to the invention the adjustable foot furthermore comprises a cap (11) with a diameter greater than that of the internal screw thread (4). According to a further aspect, the invention relates to a combination of an adjustable foot according to the invention, a substructure and equipment (14) set up in alignment on said substructure, as well as an anchor bolt (15), wherein the equipment (14) is anchored to the substructure by means of the anchor bolt (15), with the adjustable foot between them.



WO 2004/061357 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

26 August 2004