



(51) International Patent Classification:
B23K 37/04 (2006.01)

(21) International Application Number:
PCT/KR2009/004578

(22) International Filing Date:
17 August 2009 (17.08.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2008-0107481 31 October 2008 (31.10.2008) KR

(72) Inventor; and

(71) Applicant : **OH, Seong Guk** [KR/KR]; 209-704 Sinbong Maeul Xi 2 Cha Apt., 911, Sinbong-dong, Suji-gu, Yongin-si, Gyeonggi-do 448-534 (KR).

(74) Agent: **CHO, Hyok Gun**; 5th Fl., Sankwang Bldg., 125, Euljiro-4Ga, Chung-Ku, Seoul 100-194 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
24 June 2010

(54) Title: A SAW-TEETH TYPE HYDRAULIC JACK

[Fig. 3]

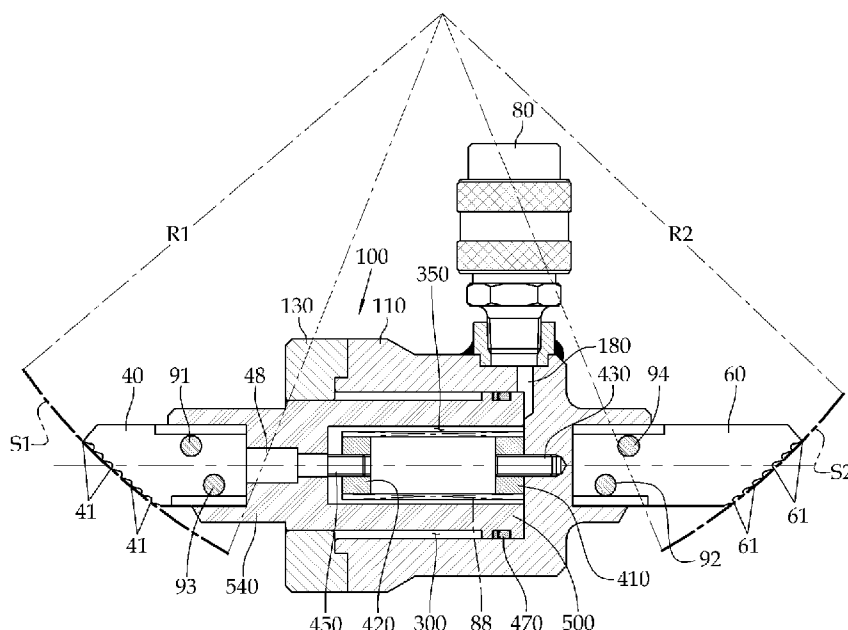

(57) Abstract: A saw-teeth type hydraulic jack 1000 according to the present invention has a cylinder body 100 in which a hydraulic pressure room 300 is provided and a stand 10 which stands the cylinder body 100 to be inclined to a base. A spool valve 500 is mounted on the hydraulic pressure room 300. A movable holding member 40 is connected to a rod 540 of the spool valve 500 and an opposite holding member 60 is provided in the cylinder body 100 to the opposite side. A plurality of teeth 41 and 61 is formed on the movable holding member 40 and the opposite holding member 60 in their ends. The teeth 41 and 61 have a shape of saw-teeth and each of line connecting the teeth 41 and 61 forms circular arcs S1 and S2, respectively.