(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
29 November 2001 (29.11.2001)

PCT

(10) International Publication Number
WO 01/91471 A3

(51) International Patent Classification[7]: H04N 9/31, 9/12

(21) International Application Number: PCT/US01/16423

(22) International Filing Date: 22 May 2001 (22.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/206,386	23 May 2000 (23.05.2000)	US
09/860,731	18 May 2001 (18.05.2001)	US

(71) Applicant: HONEYWELL INTERNATIONAL INC. [US/US]; 101 Columbia Avenue, P.O. Box 2245, Morristown, NJ 07960 (US).

(72) Inventor: SACCOMANNO, Robert, J.; 22 Glenwood Drive, Montville, NJ 07045 (US).

(74) Agents: CRISS, Roger, H. et al.; Honeywell International Inc., 101 Columbia Avenue, P.O. Box 2245, Morristown, NJ 07960 (US).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

(88) Date of publication of the international search report:
21 March 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROJECTION SYSTEM UTILIZING FIBER OPTIC ILLUMINATION

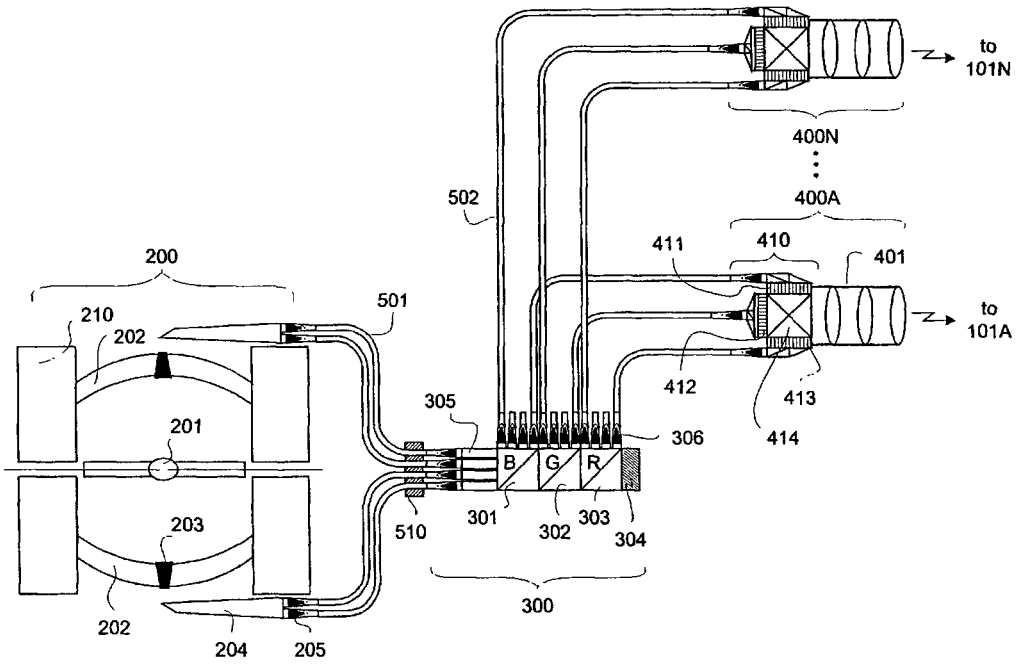

(57) Abstract: A projection display composed of a plurality of tiles (101) is illuminated by a plurality of projectors (400), one for each tile. The light from a common light source (200) is transmitted to a light separation unit (300) over a first set of fiber optic cables (501), the separation unit separating the light into individual primary colors either spatially or sequentially. The individual primary colors are then transmitted over a second set of fiber optic cables (502) to the individual projectors.

WO 01/91471 A3