

Title of Invention: Method and Apparatus for Stretching Bread
Dough and the Like



Detailed Description of the Invention

Industrial Field

This invention relates to a method and an apparatus for stretching highly elastic materials such as bread dough. More specifically, this invention provides high-quality bread by continuously stretching bread dough or the like that is supplied continuously by a conveyor to obtain thin sheet-like bread dough by using a simple vibratory conveying effect.

Prior Art

Molding elastic materials has before now only been made by adding to the conventional materials a stress that is above the yield point of the materials.

In this case, however, the lost elasticity cannot be recovered of itself. Thus in producing foods, especially bread, that require elasticity as their important condition, a skilled manual operation has always been necessitated.

When bread is automatically produced by a machine, the elasticity of the material has always been impaired while the bread is made. Further, if the elasticity is lost even a little, it is difficult to produce bread having a taste that is the same as that of bread made by a skilled

operator. Thus by potassium bromate and the like that was mixed in the material as a chemical additive, the elasticity of the "membrane-forming function" was recovered by putting the molded dough material for a certain period under a stationary condition to recover the elasticity that was lost during the time the material was being molded by machines.

As is clear, the bread dough was stretched and molded either by wearing out the inherent elasticity of the dough, or by using a screw conveyor mechanism and the like a twisting stress was exerted to the dough material to break the gluten's gel structure to deprive the material of its elasticity, and the elasticity was recovered by adding a chemical additive. However, when the bread made by bread-making machines is compared to manually prepared bread, it is seen that the former brings about an inferior taste and the solution of the problem by using a chemical additive was an unnatural approach.

To resolve the above problems, the present invention provides a method and an apparatus to produce bread dough by a machine without using the chemical additives that had been used when producing bread.

The "orbital stretching apparatus" as adopted in this invention, referred to below as "a stretching apparatus using a circular orbit revolution," is disclosed in

Japanese Patent Publication No. 63-54333 and Japanese Utility Early-Publication No. 47-13493. But these apparatuses do not have enough ability to thinly stretch dough bread having high elasticity.

The Problem to be Resolved by the Invention

The problem to be resolved is as follows:

The quality of the bread will be improved by removing the contained fermented gas due to the loss of the elasticity, which leads to the fracture of the gluten's network structure of the inner part of the bread. The problem arose by directly adding a shearing stress exerted by the opposite rollers used in the dough stretching operation to obtain sheet-like dough as conventionally made.

To remove the above disadvantages, acid additives such as potassium bromate or ascorbic acid were added to the dough material to enhance the gluten structure. The dough material in this case was molded as pieces by cutting separate pieces. By the present invention, it is not necessary to add chemical additives to the material and also it does not require a certain stationary period for the material.

The Means to Resolve the Problem

As opposed to the prior-art method and apparatus wherein the elasticity is broken, the present invention provides means to extend and stretch the dough materials to an extent that is below the yield point of the elasticity.

More specifically, a periodic strong vibration is exerted to the dough material by freely rotatable rollers that orbit along a circle. By using such a vibration, a temporary flow phenomenon in the dough, called "a thixotropy effect" will appear. By using the short period of time that occurs during this phenomenon, the bread dough is stretched to provide a thin sheet of bread material without breaking the gel structure of the dough, by not adding to the dough the so-called "tensile stress." The thus-obtained dough material is wound up in a bar shape of any continuously desired type. The rolled material is cut to a desired length to obtain small cut lengths of molded dough. Differing from the prior art wherein a small piece of bread was directly molded from a large block of the bread dough, this invention provides a variety of bread that is equivalent to that which is manually made, without using the above additives.

The fluidity of the bread dough obtained by the thixotropy effects is recoverable, thus the thinly-stretched dough produced by the present invention, when put in a stationary condition, recovers the original elasticity in a few minutes. Thus this differs from the prior art, wherein a forcible cutting operation is performed to mold dough by depriving the dough of its elasticity. Further, the use of the thixotropy effect used in the present invention does not at all damage the gluten structure in the bread dough. This invention

provides a simple method and an apparatus to thinly stretch bread dough.

In this invention, a rotating member having a number of freely rotatable planetary rollers around its periphery is provided. Bread dough is supplied to a conveying device having a plurality of rollers relative to the arcuate periphery defined by the planetary rollers. The conveyor's rollers are located below the planetary rollers. The space between the planetary rollers and the conveyor's rollers decreases in the downstream direction and the conveyor's rollers are made to be rotated so that the downstream ones are driven faster than the upstream ones. The bread dough being conveyed by the conveying device is repeatedly pressed and vibrated from above by the action of the rotating member. This brings about a thixotropy effect in the dough to temporarily enhance the fluidity of the dough. Thus it provides a great stretching effect. This is due to the difference in the rotating speed of the rollers of the conveying device.

The present invention provides a method for stretching bread dough having the steps of revolving a rotating member having a plurality of freely rotatable planetary rollers mounted around the circular periphery of the rotating member, supplying the bread dough to a conveying device located spaced apart downwardly from the orbit of the rotating member, the conveying device having a plurality of rollers that rotate gradually faster from the inlet to the outlet of the conveying device, momentarily and repeatedly pressing the bread dough moving on the conveying device by the rotating member from above the conveying device, continuously vibrating the bread dough to obtain a temporary fluidity effect in the bread dough by using a thixotropy effect gained by the vibration, and decreasing the space between the rotating member and the conveying device and increasing the speed of the rollers of the conveying device, to produce a thin and stretched bread dough supplied to the conveying device.

The present invention also provides a bread dough stretching apparatus having a rotating member having a plurality of planetary rollers that revolve along a circular orbit and a conveying device located spaced apart downwardly from the rotating member to stretch the bread dough in the space, characterized in that each of the planetary rollers of the rotating member is freely

and rotatably mounted to shafts, a curved space is defined between the conveying device and the planetary rollers located above the conveying device, the space becoming gradually narrower from the inlet of the bread dough to the outlet thereof, the space being defined by each of the rollers constituting the conveying device and the circular revolving orbit of the planetary rollers located above the conveying device's rollers gradually decreasing toward the outlet, and a speed-setting device being provided to gradually increase the speed of the rollers of the conveying device toward the outlet, so as to adjust the bread-dough stretching effect.

Further, the present invention provides a bread-dough stretching apparatus having a rotating member provided with a plurality of planetary rollers that revolve along a circular orbit of the same circle and a conveying device located spaced apart and below the rotating member to stretch the bread dough, characterized in that the planetary rollers are freely and rotatably mounted to shafts, the conveying device has a plurality of rollers in a relation opposite to the planetary rollers so as to gradually decrease the space from the inlet of the bread dough to the outlet, and a drive plate is provided to forcibly rotate the planetary rollers, the drive plate being located along the outer orbital circle of the planetary rollers and adjacent the inlet of the conveying device.

Further, the present invention provides a bread-dough stretching apparatus having a rotating member provided with a plurality of planetary rollers that revolve along a circular orbit of the same circle, a conveying device located spaced apart and below the rotating member to stretch the bread dough, and a discharge device positioned at the outlet of the conveying device, characterized in that each of the planetary the rollers of the rotating member is freely and rotatably mounted to shafts at equal intervals, the plurality of the rollers of the conveying device is mounted so that the space gradually decreases from the inlet of the conveying device toward its outlet, the rotational speed of the rollers of the conveying device is made to increase from the inlet to the outlet, and the rotational speed of the roller of the conveying device that is positioned at the outlet of the conveying device is made to be faster than the discharging speed of the discharge device.

When the bread dough passes the conveying device as the planetary rollers of the rotating member rotate, the dough located in the space is simultaneously stretched by the planetary rollers and the rollers of the conveying device at least at two points, to enhance the stretching effect. Further, the rotational speed of the roller positioned at the outlet of the conveying device is made to be faster than the speed of the discharge conveyor.

Embodiment

The embodiment will now be explained. A supply conveyor 2 to convey the bread dough 1 and a conveying device 3 positioned downstream of the supply conveyor are provided. The conveying device has a plurality of rollers 31-35. A discharge conveyor 4 is located adjacent the conveying device 3 and downstream of it.

Above the conveying device 3 is located a plurality of planetary rollers 5, 5'... so that they can orbit along a circular path.

The planetary rollers 5, 5' are freely and rotatably mounted to shafts 6 fixed to a wheel 7. The shafts 6 are opposite and parallel to the conveying device 3. Thus the planetary rollers 5, 5' also move parallel to the conveying device.

The wheel 7 is fixed to a drive shaft 8 that is supported by a frame 12, and the wheel 7 is rotated by a motor 10 via a gear 9 mounted on the drive shaft 8.

A drive plate 11 is provided at a position above the supply conveyor 2 and the downstream end thereof, so that the outer periphery of the planetary rollers can contact the drive plate 11. This helps impart an initial



rotation to the freely-rotatable planetary rollers.

The planetary rollers 5, 5' thus rotated will move on the bread dough 1 causing it to be thinly stretched.

The rollers 31-35 of the conveying device 3 are located so that the distance C between the phantom circle as depicted by the planetary rollers 5, 5' and the conveyor's rollers 31-35 decreases from the upstream roller 31 towards the downstream roller 35.

The rollers 31-35 are rotated by motors 51-55 through drive shafts so as to rotate toward the downstream direction.

The speed of the each of motors 51-55 can be adjusted individually by an adjusting device 56 such as an inverter. Thus the rotational speed of the rollers 31-35 can be increased toward the outlet (in the dough-stretching direction) based on the thixotropy effect.

In this embodiment the rollers 31-35 are made to rotate so that their rotational speed becomes faster toward the conveying direction. The increase of the rotational speed of the rollers 31-35 is made to be in inverse proportion to the decrease of the space C.

The extent of the decrease of the space C, namely, the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

rate of pressure, can be freely adjusted, as shown by the arrow f, by rotating a handle 18.

The speed of the supply conveyor 2 is determined to be the same as or less than that of the roller 31, and the speed of the discharge conveyor 4 is determined to be the same as or faster than that of the roller 35.

If, for instance, the space between the adjacent planetary rollers 5, 5' is set to be twice as much as the space between the rollers 31-35 of the conveying device, the planetary rollers 5, 5' will be located alternately in relation to the rollers 31-35, so that the generating lines of the planetary rollers 5, 5' and the rollers 31-35 of the conveying device 3 are made to meet each other almost simultaneously.

In the second embodiment, shown in Fig. 3, the planetary rollers 5, 5' are supported at either end of the rollers, as opposed to the structure of Fig. 2 wherein these rollers 5, 5' are supported in a cantilever fashion.

A rotary wheel 14 is supported by a frame 13, and a motor pulley 16 is mounted on a main shaft 15 of the wheel 14.

The planetary rollers 17, 17'...revolve as the motor pulley 16 rotates.

The remaining structure will not be explained, as it is

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

the same as that of the first embodiment.

The effect and function of the present invention are as follows:

The bread dough 1 conveyed by the upstream supply conveyor 2 is supplied to the conveying device 3 and is gripped between the group of the planetary rollers 5, 5' that rotate at a high speed, and the conveying device 3. The bread dough is gradually stretched by rollers 31-35, and their rotational speed is made to be progressively faster to discharge the dough by the discharge conveyor 4.

The stretching effect will now be explained. When the freely rotating planetary rollers 5, 5'...pass above the rollers 31-35, a repeated pressing and releasing vibration is imparted to the bread dough, to generate a thixotropy effect. Thus the fluidity of the elastic dough that normally has a low fluidity becomes temporarily high.

The bread dough 1 thus produced, which is made to have a high fluidity, can easily be stretched due to the difference in the speed of the rollers 31-35.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

Embodiment

The embodiment will now be explained. A supply conveyor 2 to convey the bread dough 1 and a conveying device 3 positioned downstream of the supply conveyor are provided. The conveying device has a plurality of rollers 31-35. A discharge conveyor 4 is located adjacent the conveying device 3 and downstream of it.

Above the conveying device 3 is located a plurality of planetary rollers 5, 5'... so that they can orbit along a circular path.

The planetary rollers 5, 5' are freely and rotatably mounted to shafts 6 fixed to a wheel 7. The shafts 6 are opposite and parallel to the conveying device 3. Thus the planetary rollers 5, 5' also move parallel to the conveying device.

The wheel 7 is fixed to a drive shaft 8 that is supported by a frame 12, and the wheel 7 is rotated by a motor 10 via a gear 9 mounted on the drive shaft 8.

A drive plate 11 is provided at a position above the supply conveyor 2 and the downstream end thereof, so that the outer periphery of the planetary rollers can contact the drive plate 11. This helps impart an initial



rotation to the freely-rotatable planetary rollers.

The planetary rollers 5, 5' thus rotated will move on the bread dough 1 causing it to be thinly stretched.

The rollers 31-35 of the conveying device 3 are located so that the distance C between the phantom circle as depicted by the planetary rollers 5, 5' and the conveyor's rollers 31-35 decreases from the upstream roller 31 towards the downstream roller 35.

The rollers 31-35 are rotated by motors 51-55 through drive shafts so as to rotate toward the downstream direction.

The speed of the each of motors 51-55 can be adjusted individually by an adjusting device 56 such as an inverter. Thus the rotational speed of the rollers 31-35 can be increased toward the outlet (in the dough-stretching direction) based on the thixotropy effect.

In this embodiment the rollers 31-35 are made to rotate so that their rotational speed becomes faster toward the conveying direction. The increase of the rotational speed of the rollers 31-35 is made to be in inverse proportion to the decrease of the space C.

The extent of the decrease of the space C, namely, the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

rate of pressure, can be freely adjusted, as shown by the arrow f, by rotating a handle 18.

The speed of the supply conveyor 2 is determined to be the same as or less than that of the roller 31, and the speed of the discharge conveyor 4 is determined to be the same as or faster than that of the roller 35.

If, for instance, the space between the adjacent planetary rollers 5, 5' is set to be twice as much as the space between the rollers 31-35 of the conveying device, the planetary rollers 5, 5' will be located alternately in relation to the rollers 31-35, so that the generating lines of the planetary rollers 5, 5' and the rollers 31-35 of the conveying device 3 are made to meet each other almost simultaneously.)

In the second embodiment, shown in Fig. 3, the planetary rollers 5, 5' are supported at either end of the rollers, as opposed to the structure of Fig. 2 wherein these rollers 5, 5' are supported in a cantilever fashion.

A rotary wheel 14 is supported by a frame 13, and a motor pulley 16 is mounted on a main shaft 15 of the wheel 14.

The planetary rollers 17, 17'...revolve as the motor pulley 16 rotates.

The remaining structure will not be explained, as it is

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

the same as that of the first embodiment.

The effect and function of the present invention are as follows:

The bread dough 1 conveyed by the upstream supply conveyor 2 is supplied to the conveying device 3 and is gripped between the group of the planetary rollers 5, 5' that rotate at a high speed, and the conveying device 3. The bread dough is gradually stretched by rollers 31-35, and their rotational speed is made to be progressively faster to discharge the dough by the discharge conveyor 4.

The stretching effect will now be explained. When the freely rotating planetary rollers 5, 5'...pass above the rollers 31-35, a repeated pressing and releasing vibration is imparted to the bread dough, to generate a thixotropy effect. Thus the fluidity of the elastic dough that normally has a low fluidity becomes temporarily high.

The bread dough 1 thus produced, which is made to have a high fluidity, can easily be stretched due to the difference in the speed of the rollers 31-35.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

The experiment showed that when the bread dough 1 received 1,000 beating actions per minute by the rollers 31-35 and the planetary rollers 5, 5'...by setting the speed of the planetary rollers 5, 5'...as 30 and 70m per minute, the bread dough was easily and temporarily extended by the thixotropy effect and a stretching effect was obtained that was not realized by the prior-art stretching method.

If the planetary rollers 5, 5' and the rollers 31-35 press the bread dough at least simultaneously at two points by oppositely aligning the generating lines of the planetary rollers and the rollers 31-35, the speed difference at these two points of the stretching portion will further and effectively stretch the bread dough.

As shown in Figs. 4 and 5, the bread dough is stretched at two or three points in this stretching portion defined by the rollers 5, 5' and rollers 31-35 and the stretching points repeatedly vary as the rollers 5, 5' revolve.

Portions of the bread dough that are not stretched are freely stretched without receiving external resistance and are repeatedly stretched in the stretching area.

Since the beating effect (thixotropy effect) can be freely adjusted by changing the rotational speed of the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

wheel 7, the stretching ratio and the desired production speed of the dough supplied can be adjusted.

In the present invention the bread dough is conveyed by a plurality of rollers 31-35. The planetary rollers 5, 5'... rotatably move on the upper surface linearly of the rollers 5, 5'..., so that no frictional stress is imparted to the bread dough, and the thixotropy effect is generated by a vibrating effect of a short frequency.

By this vibration the thixotropy effect is obtained in the bread dough 1, so that the dough easily flows and is stretched by the difference in speed of the rollers 31, 32, 33, 34, and 35 of the conveying device.

The drive plate 11 helps to initially and forcibly rotate the rollers 5, 5' to give rotational inertia to the rollers to have them easily rotate on the upper surface of the bread dough. Thus the bread dough supplied to the roller 31 cannot be forcibly pulled by the planetary rollers 5, 5'....

In this embodiment it is explained that the rotational speed of the roller 35 and the speed of the discharge conveyor 4 are the same, or the speed of the discharge conveyor 4 is faster than the rotational speed of the roller 35. However, the bread dough, after it is stretched by the rollers 31-35, tends to shrink on the discharge conveyor 4 due to its inherent elasticity, so



that it becomes difficult to produce bread dough having a desired thickness. To prevent such a phenomenon, and considering the shrinkage of the bread dough, the rotational speed of the roller 35 or 34 can be made to be faster than the conveying speed of the discharge conveyor 4. In this case the bread dough is greatly extended by the roller 35 or 34 to adjust the shrinkage of the stretched bread dough, so that dough of a desired thickness is obtained.

The Effect of the Invention

As explained above, when the bread dough is stretched in the present invention, a temporary fluidity is given to it by the thixotropy effect, and at the same time, due to this thixotropy effect, the bread dough can be stretched under a low pressure.

By temporarily generating stretchability in the bread dough, the dough is fully extended by the speed difference of the rollers of the conveying device. A thin and continuous bread dough can be easily obtained under a low pressure without breaking the gluten structure of the bread dough.

Brief Description of the Drawings

Fig. 1 is an overall side view of one embodiment of the present invention.

Fig. 2 is a cross-sectional front view of the first

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED


embodiment.

Fig. 3 is a cross-sectional front view of a second embodiment of the present invention.

Fig. 4 is an explanatory view showing the function of the present invention.

Fig. 5 is also an explanatory view showing the function of the present invention.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

Claims

1. A method for stretching bread dough having steps of revolving a rotating member having a plurality of freely rotatable planetary rollers mounted around the circular periphery of the rotating member, supplying the bread dough to a conveying device located spaced apart downwardly from the orbit of the rotating member, the conveying device having a plurality of rollers that rotate gradually faster from the inlet to the outlet of the conveying device, momentarily and repeatedly pressing the bread dough moving on the conveying device by the rotating member from above the conveying device, continuously vibrating the bread dough to obtain a temporary fluidity effect in the bread dough by using a thixotropy effect gained by the vibration, and decreasing the ratio of the space between the rotating member and the conveying device and increasing the speed of the rollers of the conveying device, to produce a thinly stretched bread dough supplied to the conveying device.

2. In a bread-dough stretching apparatus having a rotating member having a plurality of planetary rollers that revolve along a circular orbit and a conveying device located spaced apart downwardly from the rotating member to stretch the bread dough in the space, characterized in that each of the planetary rollers of the rotating member is freely and rotatably mounted to



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

shafts, a curved space is defined between the conveying device and the planetary rollers located above the conveying device, the space becoming gradually narrower from the inlet of the bread dough to the outlet thereof, the space defined by each of the rollers constituting the conveying device and the circular revolving orbit of the planetary rollers located above the conveying device's rollers gradually decreasing toward the outlet, and a speed-setting device is provided to gradually increase the speed of the rollers of the conveying device toward the outlet, so as to adjust the bread-dough stretching effect.

3. In a bread-dough stretching apparatus having a rotating member provided with a plurality of planetary rollers that revolve along a circular orbit of the same circle and a conveying device located spaced apart and below the rotating member to stretch the bread dough, characterized in that the planetary rollers are freely and rotatably mounted to shafts, the conveying device has a plurality of rollers in a relation opposite to the planetary rollers so as to gradually decrease the space from the inlet of the bread dough to the outlet, and a drive plate is provided to forcibly rotate the planetary rollers, the drive plate being located along the outer orbital circle of the planetary rollers and adjacent the inlet of the conveying device.

4. A bread-dough stretching apparatus having a rotating



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

member provided with a plurality of planetary rollers that revolve along a circular orbit of the same circle, a conveying device located spaced apart and below the rotating member to stretch the bread dough, and a discharge device positioned at the outlet of the conveying device, characterized in that each of the planetary rollers of the rotating member is freely and rotatably mounted to shafts at equal intervals, the plurality of the rollers of the conveying device is mounted so that the space gradually decreases from the inlet of the conveying device toward its outlet, the rotational speed of the rollers of the conveying device is made to increase from the inlet to the outlet, and the rotational speed of the roller of the conveying device that is positioned at the outlet of the conveying device is made to be faster than the discharging speed of the discharge device.

5. A bread-dough stretching apparatus of any of claims 2, 3, and 4 wherein the planetary rollers and the rollers of the conveying device are located at least at two points to cause the planetary rollers and the rollers of the conveying device to simultaneously face each other, thereby to increase the stretching effect of the dough.

6. A bread-dough stretching apparatus of any of claims 2, 3, 4, and 5 wherein vibrations are given to the dough supplied, and wherein the number of the vibrations can be changed by varying the rotational speed of the rotating



This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

member, regardless of the conveying speed of the conveying device.

7. A bread-dough stretching apparatus of any of claims 2, 3, 5, and 6 wherein the speed of the supplying conveyor is the same as or less than that of the rotational speed of the upstream-end roller of the conveying device and the speed of the discharge conveyor is the same as or less than that of the rotational speed of the downstream-end roller of the conveying device.

This Sheet Has Been Replaced



* C L M S *

THIS SHEET HAS BEEN
REPLACED

Method and Apparatus for Stretching Bread Dough and the Like

Abstract

[The Purpose of the Invention]

In the prior-art bread-dough stretching method, a shearing stress was directly imparted to the bread dough by opposing rollers. This method broke the gluten structure in the bread dough, so that the dough lost elasticity and could not contain foam-like fermented gas. The present invention intends to overcome this inferior quality bread dough.

[Structure]

The present invention has a rotating member having a plurality of planetary rollers that revolve along a circular orbit and a conveying device positioned below the rotating member spaced apart from the member to extend the bread dough in the space. Each of the planetary rollers is rotatably supported by a shaft and the conveying device has a plurality of rollers positioned opposite the planetary rollers. The space gradually decreases from the inlet to the outlet of the conveying device.

Selected Drawing: Fig. 1 (to accompany the abstract for publication)

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

FIG. 2

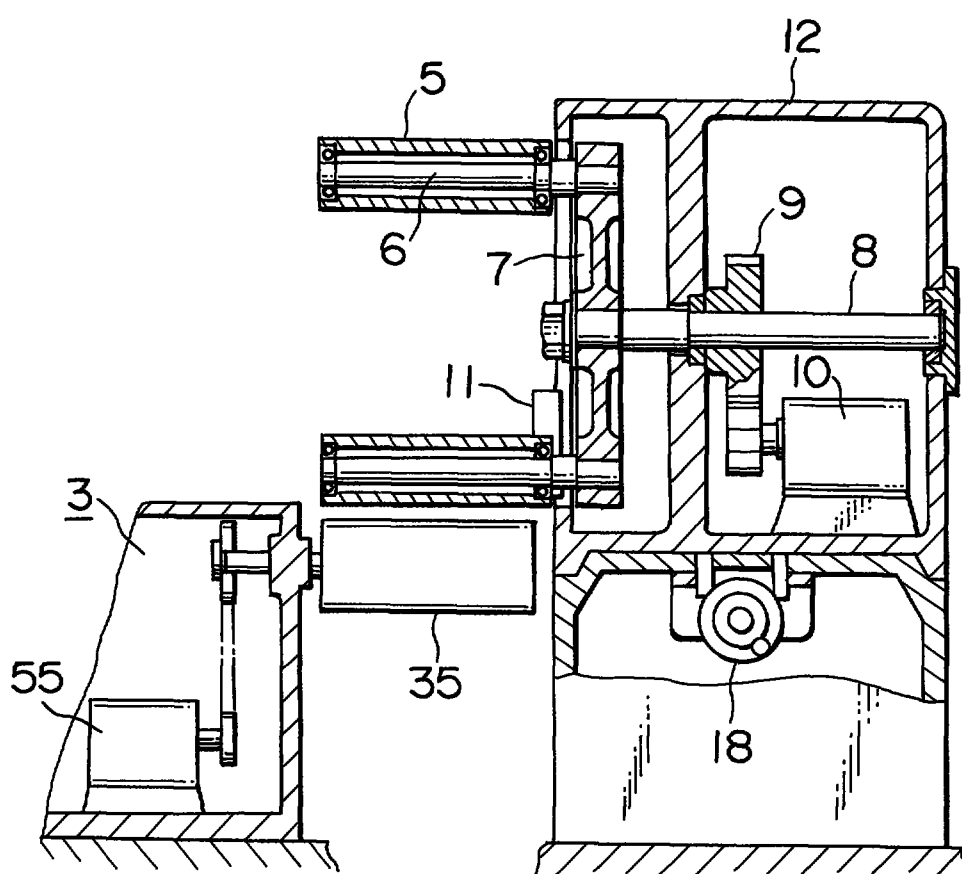


FIG. 3

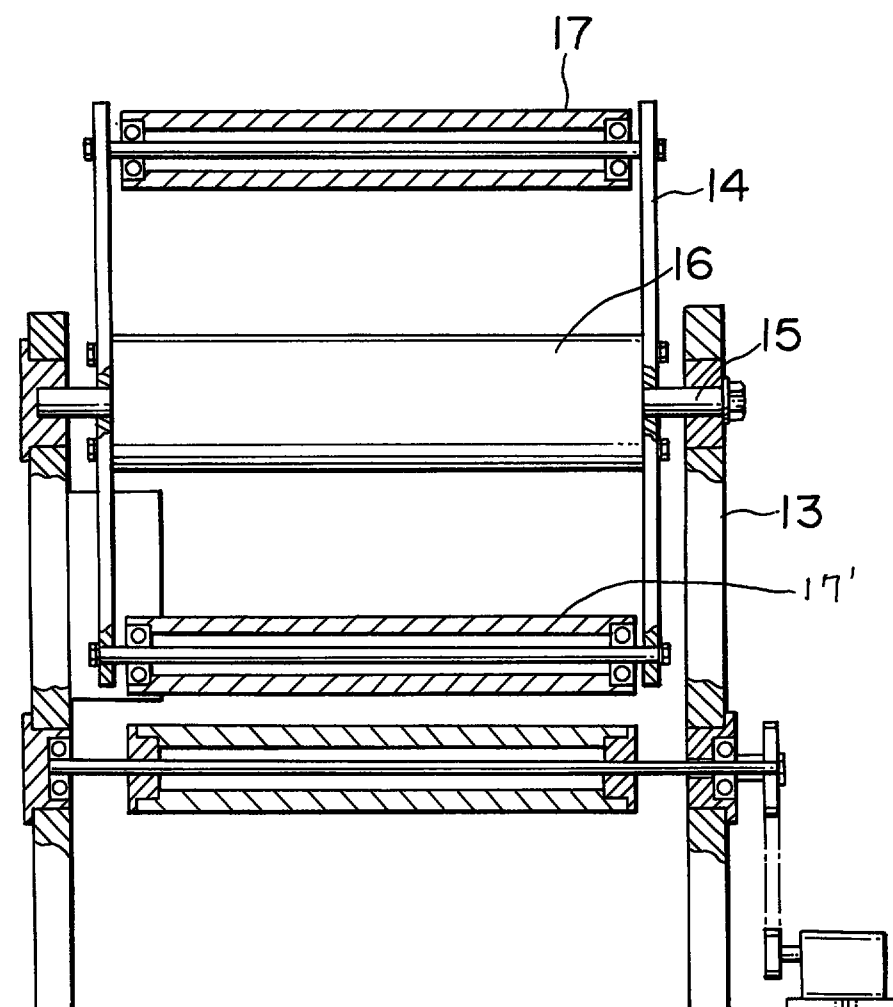
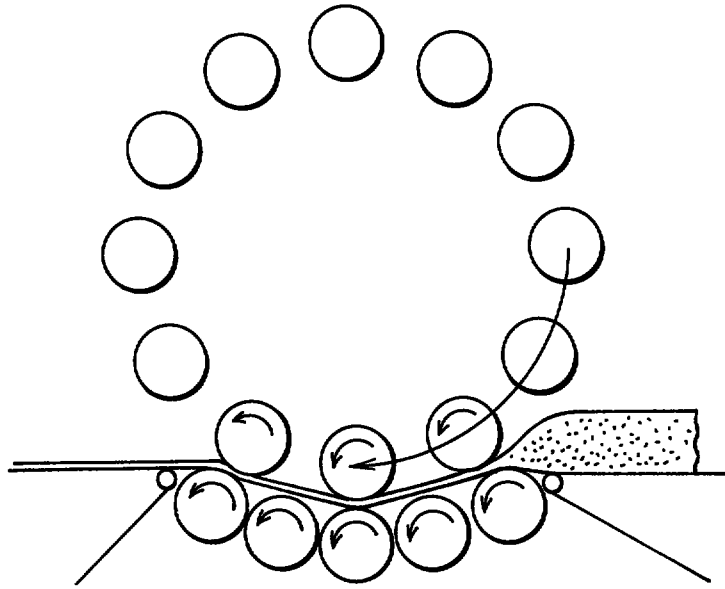
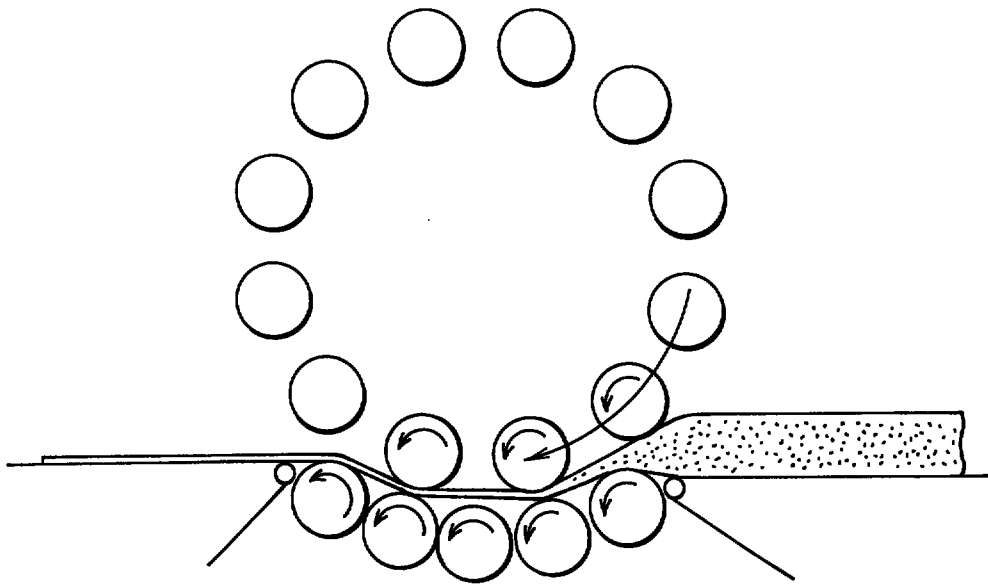


FIG. 4**FIG. 5**

22 FEB 1997

- 9 -

THE BRIEF DESCRIPTION OF THE DRAWINGSEmbodiment

The embodiment will now be explained. A supply conveyor 2 to convey the bread dough 1 and a conveying device 3 positioned downstream of the supply conveyor are provided. The conveying device has a plurality of rollers 31-35. A discharge conveyor 4 is located adjacent the conveying device 3 and downstream of it.

Above the conveying device 3 is located a plurality of planetary rollers 5, 5'... so that they can orbit along a circular path.

The planetary rollers 5, 5' are freely and rotatably mounted to shafts 6 fixed to a wheel 7. The shafts 6 are opposite and parallel to the conveying device 3. Thus the planetary rollers 5, 5' also move parallel to the conveying device.

The wheel 7 is fixed to a drive shaft 8 that is supported by a frame 12, and the wheel 7 is rotated by a motor 10 via a gear 9 mounted on the drive shaft 8.

A drive plate 11 is provided at a position above the supply conveyor 2 and the downstream end thereof, so that the outer periphery of the planetary rollers can contact the drive plate 11. This helps impart an initial

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

22 FEB 1997

- 10 -

rotation to the freely-rotatable planetary rollers.

The planetary rollers 5, 5' thus rotated will move on the bread dough 1 causing it to be thinly stretched.

The rollers 31-35 of the conveying device 3 are located so that the distance C between the phantom circle as depicted by the planetary rollers 5, 5' and the conveyor's rollers 31-35 decreases from the upstream roller 31 towards the downstream roller 35.

The rollers 31-35 are rotated by motors 51-55 through drive shafts so as to rotate toward the downstream direction.

The speed of the each of motors 51-55 can be adjusted individually by an adjusting device 56 such as an inverter. Thus the rotational speed of the rollers 31-35 can be increased toward the outlet (in the dough-stretching direction) based on the thixotropy effect.

In this embodiment the rollers 31-35 are made to rotate so that their rotational speed becomes faster toward the conveying direction. The increase of the rotational speed of the rollers 31-35 is made to be in inverse proportion to the decrease of the space C.

The extent of the decrease of the space C, namely, the

22 FEB 1997

- 11 -

rate of pressure, can be freely adjusted, as shown by the arrow f, by rotating a handle 18.

The speed of the supply conveyor 2 is determined to be the same as or less than that of the roller 31, and the speed of the discharge conveyor 4 is determined to be the same as or faster than that of the roller 35.

If, for instance, the space between the adjacent planetary rollers 5, 5' is set to be twice as much as the space between the rollers 31-35 of the conveying device, the planetary rollers 5, 5' will be located alternately in relation to the rollers 31-35, so that the generating lines of the planetary rollers 5, 5' and the rollers 31-35 of the conveying device 3 are made to meet each other almost simultaneously.

In the second embodiment, shown in Fig. 3, the planetary rollers 5, 5' are supported at either end of the rollers, as opposed to the structure of Fig. 2 wherein these rollers 5, 5' are supported in a cantilever fashion.

A rotary wheel 14 is supported by a frame 13, and a motor pulley 16 is mounted on a main shaft 15 of the wheel 14.

The planetary rollers 17, 17'...revolve as the motor pulley 16 rotates.

The remaining structure will not be explained, as it is

22 FEB 1997

- 12 -

the same as that of the first embodiment.

The effect and function of the present invention are as follows:

The bread dough 1 conveyed by the upstream supply conveyor 2 is supplied to the conveying device 3 and is gripped between the group of the planetary rollers 5, 5' that rotate at a high speed, and the conveying device 3. The bread dough is gradually stretched by rollers 31-35, and their rotational speed is made to be progressively faster to discharge the dough by the discharge conveyor 4.

The stretching effect will now be explained. When the freely rotating planetary rollers 5, 5'...pass above the rollers 31-35, a repeated pressing and releasing vibration is imparted to the bread dough, to generate a thixotropy effect. Thus the fluidity of the elastic dough that normally has a low fluidity becomes temporarily high.

The bread dough 1 thus produced, which is made to have a high fluidity, can easily be stretched due to the difference in the speed of the rollers 31-35.

22 FEB 1997

-13-

An experiment showed that when the bread dough 1 received 1,000 beating actions per minute by the rollers 31-35 and the planetary rollers 5, 5'...by setting the speed of the planetary rollers 5, 5'...as 30 and 70m per minute, the bread dough was easily and temporarily extended by the thixotropy effect and a stretching effect was obtained that was not realized by the prior-art stretching method.

If the planetary rollers 5, 5' and the rollers 31-35 press the bread dough at least simultaneously at two points by oppositely aligning the generating lines of the planetary rollers and the rollers 31-35, the speed difference at these two points of the stretching portion will further and effectively stretch the bread dough.

As shown in Figs. 4 and 5, the bread dough is stretched at two or three points in this stretching portion defined by the rollers 5, 5' and rollers 31-35 and the stretching points repeatedly vary as the rollers 5, 5' revolve.

Portions of the bread dough that are not stretched are freely stretched without receiving external resistance and are repeatedly stretched in the stretching area.

Since the beating effect (thixotropy effect) can be freely adjusted by changing the rotational speed of the

22 FEB 1997

-14-

wheel 7, the stretching ratio and the desired production speed of the dough supplied can be adjusted.

In the present invention the bread dough is conveyed by a plurality of rollers 31-35. The planetary rollers 5, 5'... rotatably move on the upper surface linearly of the rollers 5, 5'..., so that no frictional stress is imparted to the bread dough, and the thixotropy effect is generated by a vibrating effect of a short frequency.

By this vibration the thixotropy effect is obtained in the bread dough 1, so that the dough easily flows and is stretched by the difference in speed of the rollers 31, 32, 33, 34, and 35 of the conveying device.

The drive plate 11 helps to initially and forcibly rotate the rollers 5, 5' to give rotational inertia to the rollers to have them easily rotate on the upper surface of the bread dough. Thus the bread dough supplied to the roller 31 cannot be forcibly pulled by the planetary rollers 5, 5'....

In this embodiment it is explained that the rotational speed of the roller 35 and the speed of the discharge conveyor 4 are the same, or the speed of the discharge conveyor 4 is faster than the rotational speed of the roller 35. However, the bread dough, after it is stretched by the rollers 31-35, tends to shrink on the discharge conveyor 4 due to its inherent elasticity, so

22 FEB 1997

-15-

that it becomes difficult to produce bread dough having a desired thickness. To prevent such a phenomenon, and considering the shrinkage of the bread dough, the rotational speed of the roller 35 or 34 can be made to be faster than the conveying speed of the discharge conveyor 4. In this case the bread dough is greatly extended by the roller 35 or 34 to adjust the shrinkage of the stretched bread dough, so that dough of a desired thickness is obtained.

The Effect of the Invention

As explained above, when the bread dough is stretched in the present invention, a temporary fluidity is given to it by the thixotropy effect, and at the same time, due to this thixotropy effect, the bread dough can be stretched under a low pressure.

By temporarily generating stretchability in the bread dough, the dough is fully extended by the speed difference of the rollers of the conveying device. A thin and continuous bread dough can be easily obtained under a low pressure without breaking the gluten structure of the bread dough.

Brief Description of the Drawings

Fig. 1 is an overall side view of one embodiment of the present invention.

Fig. 2 is a cross-sectional front view of the first

22 FEB 1997

-16-

embodiment.

Fig. 3 is a cross-sectional front view of a second embodiment of the present invention.

Fig. 4 is an explanatory view showing the function of the present invention.

Fig. 5 is also an explanatory view showing the function of the present invention.

22 FEB 1997

-17-

Claims

1. A method for stretching bread dough having steps of revolving a rotating member having a plurality of freely rotatable planetary rollers mounted around the circular periphery of the rotating member, supplying the bread dough to a conveying device located spaced apart downwardly from the orbit of the rotating member, the conveying device having a plurality of rollers that rotate gradually faster from the inlet to the outlet of the conveying device, momentarily and repeatedly pressing the bread dough moving on the conveying device by the rotating member from above the conveying device, continuously vibrating the bread dough to obtain a temporary fluidity effect in the bread dough by using a thixotropy effect gained by the vibration, and decreasing the ratio of the space between the rotating member and the conveying device and increasing the speed of the rollers of the conveying device, to produce a thinly stretched bread dough supplied to the conveying device.

2. In a bread-dough stretching apparatus having a rotating member having a plurality of planetary rollers that revolve along a circular orbit and a conveying device located spaced apart downwardly from the rotating member to stretch the bread dough in the space, characterized in that each of the planetary rollers of the rotating member is freely and rotatably mounted to



* C L M S *

22 FEB 1997

-18-

shafts, a curved space is defined between the conveying device and the planetary rollers located above the conveying device, the space becoming gradually narrower from the inlet of the bread dough to the outlet thereof, the space defined by each of the rollers constituting the conveying device and the circular revolving orbit of the planetary rollers located above the conveying device's rollers gradually decreasing toward the outlet, and a speed-setting device is provided to gradually increase the speed of the rollers of the conveying device toward the outlet, so as to adjust the bread-dough stretching effect.

3. In a bread-dough stretching apparatus having a rotating member provided with a plurality of planetary rollers that revolve along a circular orbit of the same circle and a conveying device located spaced apart and below the rotating member to stretch the bread dough, characterized in that the planetary rollers are freely and rotatably mounted to shafts, the conveying device has a plurality of rollers in a relation opposite to the planetary rollers so as to gradually decrease the space from the inlet of the bread dough to the outlet, and a drive plate is provided to forcibly rotate the planetary rollers, the drive plate being located along the outer orbital circle of the planetary rollers and adjacent the inlet of the conveying device.

4. A bread-dough stretching apparatus having a rotating



22 FEB 1997

-19-

member provided with a plurality of planetary rollers that revolve along a circular orbit of the same circle, a conveying device located spaced apart and below the rotating member to stretch the bread dough, and a discharge device positioned at the outlet of the conveying device, characterized in that each of the planetary rollers of the rotating member is freely and rotatably mounted to shafts at equal intervals, the plurality of the rollers of the conveying device is mounted so that the space gradually decreases from the inlet of the conveying device toward its outlet, the rotational speed of the rollers of the conveying device is made to increase from the inlet to the outlet, and the rotational speed of the roller of the conveying device that is positioned at the outlet of the conveying device is made to be faster than the discharging speed of the discharge device.

5. A bread-dough stretching apparatus of any of claims 2, 3, and 4 wherein the planetary rollers and the rollers of the conveying device are located at least at two points to cause the planetary rollers and the rollers of the conveying device to simultaneously face each other, thereby to increase the stretching effect of the dough.

6. A bread-dough stretching apparatus of any of claims 2, 3, 4, and 5 wherein vibrations are given to the dough supplied, and wherein the number of the vibrations can be changed by varying the rotational speed of the rotating



22 FEB 1997

-20-

member, regardless of the conveying speed of the conveying device.

7. A bread-dough stretching apparatus of any of claims 2, 3, 5, and 6 wherein the speed of the supplying conveyor is the same as or less than that of the rotational speed of the upstream-end roller of the conveying device and the speed of the discharge conveyor is the same as or less than that of the rotational speed of the downstream-end roller of the conveying device.



22 FEB 1997

-21-

Method and Apparatus for Stretching Bread Dough and the Like

Abstract

[The Purpose of the Invention]

In the prior-art bread-dough stretching method, a shearing stress was directly imparted to the bread dough by opposing rollers. This method broke the gluten structure in the bread dough, so that the dough lost elasticity and could not contain foam-like fermented gas. The present invention intends to overcome this inferior quality bread dough.

[Structure]

The present invention has a rotating member having a plurality of planetary rollers that revolve along a circular orbit and a conveying device positioned below the rotating member spaced apart from the member to extend the bread dough in the space. Each of the planetary rollers is rotatably supported by a shaft and the conveying device has a plurality of rollers positioned opposite the planetary rollers. The space gradually decreases from the inlet to the outlet of the conveying device.

Selected Drawing: Fig. 1 (to accompany the abstract for publication)

This Sheet Has Been Replaced


THIS SHEET HAS BEEN
REPLACED



TEXT OF THE ABSTRACT

METHOD AND APPARATUS FOR STRETCHING BREAD DOUGH AND THE LIKE

In the prior-art bread-dough stretching method, a shearing stress was directly imparted to the bread dough by opposing rollers. This method broke the gluten structure in the bread dough, so that the dough lost elasticity and could not contain foam-like fermented gas. The present invention intends to overcome this inferior quality bread dough. The present invention has a rotating member having a plurality of planetary rollers that revolve along a circular orbit and a conveying device positioned below the rotating member spaced apart from the member to extend the bread dough in the space. Each of the planetary rollers is rotatably supported by a shaft and the conveying device has a plurality of rollers positioned opposite the planetary rollers. The space gradually decreases from the inlet to the outlet of the conveying device.

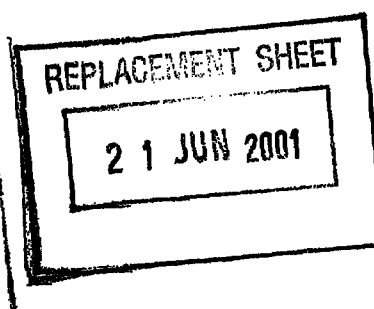

21 JUN 2001

- 9 -

Embodiment

The embodiment will now be explained. A supply conveyor 2 to convey the bread dough 1 and a conveying device 3 positioned downstream of the supply conveyor are provided. The conveying device has a plurality of rollers 31-35. A discharge conveyor 4 is located adjacent the conveying device 3 and downstream of it.

Above the conveying device 3 is located a plurality of planetary rollers 5, 5'... so that they can orbit along a circular path.

The planetary rollers 5, 5' are freely and rotatably mounted to shafts 6 fixed to a wheel 7. The shafts 6 are opposite and parallel to the conveying device 3. Thus the planetary rollers 5, 5' also move parallel to the conveying device.

The wheel 7 is fixed to a drive shaft 8 that is supported by a frame 12, and the wheel 7 is rotated by a motor 10 via a gear 9 mounted on the drive shaft 8.

A drive plate 11 is provided at a position above the supply conveyor 2 and the downstream end thereof, so that the outer periphery of the planetary rollers can contact the drive plate 11. This helps impart an initial