

TITLE OF THE INVENTION

BRAKE SHOE FOR ELEVATOR EMERGENCY STOP, DEVICE FOR
ELEVATOR EMERGENCY STOP AND ELEVATOR WITH EMERGENCY
STOP FUNCTION

5

BACKGROUND OF THE INVENTION

The present invention relates to a brake shoe for
elevator emergency stop, a device for elevator
emergency stop and an elevator with an emergency stop
function.

10

An elevator is provided with a device for
emergency stop in order to prevent a fall due to
unexpected breakdown of the elevator. The device for
emergency stop comprises a cage elevated by an
elevating means, an elastic member attached to the
15 bottom part of the cage and having a U shape, capable
of opening in a horizontal direction, a pair of plate-
like guide members opposing each other and having outer
surfaces contacting the end of the elastic member,
respectively, and inner surfaces inclining such that
20 a gap between the guide members gradually decreases
toward the upper ends of the guide members, a rail
which has a T-shaped cross section and positioned
between the guide members and extending in a vertical
direction, a pair of brake shoes provided in the gap
25 between the guide members, arranged symmetrically with
respect to the rail, capable of moving vertically along
the inner surfaces of the guide member, and having

braking faces opposing each other, and a pair of
pulling means attached to the brake shoes, respectively,
for pulling upward each the brake shoes. In such a
device for emergency stop, if the cage falls due to the
5 breakdown of the elevating means, the pulling means
operates by detecting the falling speed of the cage to
cause the elastic member to press the guide members so
that the brake shoes pinches the rail and, as a result,
the speed of the falling cage is reduced and the cage
10 is stopped by the frictional force between the brake
shoes and the rail.


Heretofore, the brake shoes have been made of such
materials as cast iron or copper-based sintered alloys
having suitable coefficients of friction and wear
15 resistance. However, the recent demand for high-speed
and large-capacity elevators because of high-rise
buildings has brought about the problems of heat
generation due to friction and decrease in the
coefficient of friction. For example, the result of a
20 simulation indicates that the localized temperature of
the sliding face by friction exceeds 1000°C in the case
where the moving speed of an elevator reaches 800 m/min.
If such a temperature generates at the time when the
elevator slows down and stops, the use of a brake shoe
25 made of a metal becomes difficult in terms of strength
and heat resistance. In addition, another problem is
seizure because of the reaction between the brake shoe

and the rail after slowing down and stop.

Based on the above-described background, Japanese Patent Application Publication (JP-B) No. 62-34,674 discloses the use of a brake shoe made by embedding a sliding member, which has a plurality of projections formed integrally with a ceramic plate having excellent heat resistance, in the braking face side of the metal body that faces a rail. However, since a plurality of the projections are formed integrally with a ceramic plate, the impact generated by the pinching of the rail at the time of slowing down and stop causes the breakdown of the root of the projections thereby remarkably decreasing the coefficient of friction of the projections, i.e., the braking effect diminishes. In addition, since the amount of wear of the ceramic material is very small, the friction property per unit number of the projections is not always satisfactory. As a result, instant slowing down and stop of the elevator at the time of emergency will become difficult.

BRIEF SUMMARY OF THE INVENTION

One of the object of the present invention is to provide a brake shoe for elevator emergency stop which has a heat resistance to a temperature that exceeds 1000°C as well as a stabilized high coefficient of friction, an excellent seizure-resistance to rail and a stabilized braking property even under the condition of high speed and high stress.



Another object of the present invention is to provide a brake shoe for elevator emergency stop which has a heat resistance to a temperature that exceeds 1000°C as well as a stabilized high coefficient of friction, an excellent seizure-resistance to rail, an excellent impact resistance and a stabilized braking property even under the condition of high speed and high stress.

Another object of the present invention is to provide a device for elevator emergency stop having a stabilized braking property and small size.

Still another object of the present invention is to provide an elevator provided with a device for elevator emergency stop where the cage securely slows down and stops without causing seizure on the rail at the time when the cage of the elevator is caused to fall due to the breakdown of the elevating means of the elevator.

According to the present invention there is provided a brake shoe for elevator emergency stop comprising a brake body having a braking face and a braking piece arranged on the braking face side. The braking piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and no less than 10 wt% of at least one ceramic material selected from the group

This Sheet Has Been Replaced



- 5 -

THIS SHEET HAS BEEN
REPLACED

consisting of a silicon carbide whisker and a silicon carbide platelet.

Also according to the present invention there is provided a device for elevator emergency stop
5 comprising:

an elastic member having a U shape, capable of opening in a horizontal direction;

a pair of guide members opposing each other and having outer surfaces contacting the end of the elastic member, respectively, and inner surfaces inclining such
10 that a gap between the guide members gradually decreases toward the upper ends of the guide member;

a rail having a T-shaped cross section, positioned between the guide members and extending in a vertical
15 direction;

a pair of brake shoes provided in the gap between the guide members, arranged symmetrically with respect to the rail, capable of moving vertically along the inner surfaces of the guide members, and having braking
20 faces opposing each other; and

a pair of pulling means attached to the brake shoes, respectively, for pulling upward the brake shoes along the guide members, in the case of emergency, to cause the elastic member to press the guide members so
25 that the brake shoes pinch the rail. The brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged on the braking face side.


The brake piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and no less than 10 wt% of
5 at least one ceramic material selected from the group consisting of a silicon carbide whisker and a silicon carbide platelet.

Further, according to the present invention there is provided an elevator with an emergency stop function
10 comprising:

- a cage;
- an elevating means for elevating the cage;
- an elastic member having a U shape, capable of opening in a horizontal direction and attached to the
15 bottom part of the cage by a supporting means;
- a pair of guide members opposing each other and having outer surfaces contacting the end of the elastic member, respectively, and inner surfaces inclining such that a gap between the guide members gradually
20 decreases toward the upper ends of the guide member;

- a rail having a T-shaped cross section, positioned between the guide members and extending in a vertical direction;

- a pair of brake shoes provided in the gap between
25 the guide members, arranged symmetrically with respect to the rail, capable of moving vertically along the inner surfaces of the guide members, and having braking

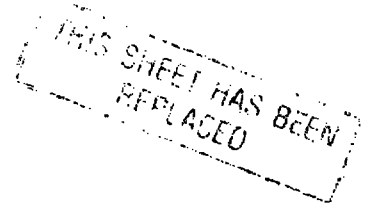

- 7 -

faces opposing each other; and

a pair of pulling means attached to the brake shoes, respectively, for pulling upward the brake shoes along the guide members, at the time when the cage
5 falls due to the breakdown of the elevating means, to cause the elastic member to press the guide members so that the brake shoes pinch the rail. The brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged on the braking face side.
10 The brake piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and no less than 10 wt% of at least one ceramic material selected from the group
15 consisting of a silicon carbide whisker and a silicon carbide platelet.

Further, according to the present invention there is provided a brake shoe for elevator emergency stop comprising a brake body having a braking face and a
20 braking piece positioned on the braking face side. The brake piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and a plurality of ceramic fibers
25 dispersed and embedded in the base material to be present in a vertical state at the braking face.

Further, according to the present invention there

is provided a device for elevator emergency comprising:

an elastic member having a U shape, capable of opening in a horizontal direction;

5 a pair of guide members opposing each other and having outer surfaces contacting the end of the elastic member, respectively, and inner surfaces inclining such that a gap between the guide members gradually decreases toward the upper ends of the guide member;

10 a rail having a T-shaped cross section, positioned between the guide members and extending in a vertical direction;

15 a pair of brake shoes provided in the gap between the guide members, arranged symmetrically with respect to the rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

20 a pair of pulling means attached to the brake shoes, respectively, for pulling upward the brake shoes along the guide members, in the case of emergency, to cause the elastic member to press the guide members so that the brake shoes pinch the rail. The brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged on the braking face side. The braking piece is made of a composite material
25 containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and a plurality of ceramic

fibers dispersed and embedded in the base material to be present in a vertical state at the braking face.

Further, according to the present invention there is provided elevator with an emergency stop function comprising:

5

a cage;

an elevating means for elevating the cage;

an elastic member having a U shape, capable of opening in a horizontal direction and attached to the bottom part of the cage by a supporting means;

10

a pair of guide members opposing each other and having outer surfaces contacting the end of the elastic member respectively, and inner surfaces inclining such that a gap between the guide members gradually

15

decreases toward the upper ends of the guide member;

a rail having a T-shaped cross section, positioned between the guide members and extending in a vertical direction;

a pair of brake provided in the gap between the guide members, arranged symmetrically with respect to the rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

20

a pair of pulling up means attached to the brake shoes, respectively, for pulling upward the brake shoes along the guide member, at the time when the cage falls due to the breakdown of the elevating means, to cause

25

5 The braking piece is made of a composite material
containing a ceramic base material selected from the
group consisting of silicon nitride, titanium boride,
sialon and silicon carbide, and a plurality of ceramic
fibers dispersed and embedded in the base material to
10 be present in a vertical state at the braking face.

Further, according to the present invention there

is provided a device for elevator emergency stop comprising:

an elastic member having a U shape, capable of opening in a horizontal direction;

5 a pair of guide members opposing each other and having outer surfaces contacting the end of the elastic member, respectively, and inner surfaces inclining such that a gap between the guide members gradually decreases toward the upper ends of the guide member;

10 a rail having a T-shaped cross section, positioned between the guide members and extending in a vertical direction;

a pair of brake shoes provided in the gap between the guide members, arranged symmetrically with respect to the rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

20 a pair of pulling means attached to the brake shoes, respectively, for pulling upward the brake shoes along the guide members, in the case of emergency, to cause the elastic members to press the guide members so that the brake shoes pinch the rail.

The brake shoe comprises (a) a brake body having a braking face and (b) a plurality of braking pieces embedded in the braking face side of the brake body to be projected from the braking face. The projection of each of the braking pieces forms a column or

a multi-cornered pole having rounded corners. Each of
braking pieces is made of a composite material
containing a ceramic base material selected from the
group consisting of silicon nitride, silicon carbide
5 and sialon, and particles of at least one ceramic
material selected from the group consisting of a
carbide, a nitride and a boride. The ceramic particles
have particle size in the range of 10 to 150 μm and
dispersed into the ceramic base material.

10 Further, according to the present invention there
is provided an elevator with an emergency stop function
comprising:

a cage;

an elevating means for elevating the cage;

15 an elastic member having a U shape, capable of
opening in a horizontal direction and attached to the
bottom part of the cage by a supporting means;

a pair of guide members opposing each other and
having outer surfaces contacting the end of the elastic
20 member, respectively, and inner surfaces inclining such
that a gap between the guide members gradually
decreases toward the upper ends of the guide member;

a rail having a T-shaped cross section, positioned
between the guide members and extending in a vertical
25 direction;

a pair of brake shoes provided in the gap between
the guide members, arranged symmetrically with respect

to the rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

5 a pair of pulling means attached to the brake shoes, respectively, for pulling upward the brake shoes along the guide members, at the time when the cage falls due to the breakdown of the elevating means, to cause the elastic member to press the guide members so that the brake shoes pinch the rail.

10 The brake shoe comprises (a) a brake body having a braking face and (b) a plurality of braking pieces embedded in the braking face side of the brake body to be projected from the braking face. The projection of each of braking piece forms of a column or a multi-
15 cornered pole having rounded corners. Each of braking pieces is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, silicon carbide and sialon, and particles of at least one ceramic material
20 selected from the group consisting of a carbide, a nitride and a boride. The ceramic particles have particle size in the range of 10 to 150 μm and disposed into the ceramic based material.

Further, according to the present invention there
25 is provided a device for elevator emergency stop comprising:

an elastic member having a U shape, capable of

opening in a horizontal direction;

5 a pair of guide members opposing each other and having outer surfaces contacting the end of the elastic member, respectively, and inner surfaces inclining such that a gap between the guide members gradually decreases toward the upper ends of the guide member;

a rail having a T-shaped cross section, positioned between the guide members and extending in a vertical direction;

10 a pair of brake shoes provided in the gap between the guide members, arranged symmetrically with respect to the rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

15 a pair of pulling means attached to the brake shoes, respectively, for pulling upward the brake shoes along the guide members, in the case of emergency, to cause the elastic member to press the guide members so that the brake shoes pinch the rail,

20 wherein the elastic member has an elastic force for pressing the guide members, which becomes larger as the upper portion of each of the guide members.

Still further, according to the present invention there is provided an elevator with an emergency stop function, comprising:

25 a cage;
an elevating means for elevating the cage;

an elastic member having a U shape, capable of opening in a horizontal direction and attached to the bottom part of the cage by a supporting means;

5 a pair of guide members opposing each other and having outer surfaces contacting the end of the elastic member, respectively, and inner surfaces inclining such that a gap between the guide members gradually decreases toward the upper ends of the guide member;

10 a rail having a T-shaped cross section, positioned between the guide members and extending in a vertical direction;

15 a pair of brake shoes provided in the gap between the guide members, arranged symmetrically with respect to the rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

20 a pair of pulling means attached to the brake shoes, respectively, for pulling upward the brake shoes along the guide members, at the time when the cage falls due to the breakdown of the elevating means, to cause the elastic member to press the guide members so that the brake shoes pinch the rail,

25 wherein the elastic member has an elastic force for pressing the guide members, which becomes larger as the upper portion of each of guide members.

Additional object and advantages of the invention will be set forth in the description which follows, and

in part will be obvious from the description, or may be learned by practice of the invention. The object and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate presently preferred embodiments of the invention, and together with the general description given above and the detailed description of the preferred embodiments given below, serve to explain the principles of the invention.

FIG. 1 is a schematic diagram of an elevator with a device for emergency stop of the present invention;

FIG. 2 is a view in the direction of the arrow A of the elevator of FIG. 1;

FIG. 3 is a cross-sectional view of the device for emergency stop of the elevator of FIG. 1;

FIG. 4 is a cross-sectional view taken through reference line IV - IV of FIG. 3;

FIG. 5A is a cross-sectional view of a braking piece to be incorporated into the brake shoe of the device for emergency stop of FIG. 3;

FIG. 5B is a front view of the braking piece of FIG. 5A;

FIG. 6A is a cross-sectional view of another braking piece to be incorporated into the brake shoe of the device for emergency stop of FIG. 3;

5 FIG. 6B is a front view of the braking piece of FIG. 6A.;

FIG. 7 is a cross-sectional view illustrating the state of emergency of the device for elevator emergency stop of FIG. 3;

10 FIG. 8 is a cross-sectional view of another device for elevator emergency stop of the present invention;

FIG. 9A is a front view of a brake shoe to be incorporated into the device for emergency stop of FIG. 8;

15 FIG. 9B is a cross-sectional view taken through reference line IXB - IXB of FIG. 9A;

FIG. 10A is a front view of another brake shoe to be incorporated into the device for emergency stop of FIG. 8;

20 FIG. 10B is a cross-sectional view taken through reference line XB - XB of FIG. 10A;

FIG. 11A is a front view of yet another brake shoe to be incorporated into the device for emergency stop of FIG. 8;

25 FIG. 11B is a cross-sectional view taken through reference line XIB - XIB of FIG. 11A;

FIG. 12A is a front view of yet another brake shoe to be incorporated into the device for emergency stop

of FIG. 8;

FIG. 12B is a cross-sectional view taken through reference line XIIB - XIIB of FIG. 12A;

FIG. 13A is a cross-sectional view of a braking
5 piece to be incorporated into the brake shoe of the device for emergency stop of FIG. 8.

FIG. 13B is a front view of the braking piece of FIG. 13A;

FIG. 14A is a cross-sectional view of another
10 braking piece to be incorporated into the brake shoe of the device for emergency stop of FIG. 8;

FIG. 14B is a front view of the braking piece of FIG. 14A;

FIG. 15 is a cross-sectional view illustrating the
15 state of emergency of another device for elevator emergency stop of the present invention;

FIG. 16 is a cross-sectional view of yet another device for elevator emergency stop of the present invention;

20 FIG. 17 is a slant view of an elastic member to be incorporated into the device for emergency stop of FIG. 16;

FIG. 18 is a cross-sectional view illustrating the state of emergency of yet another device for elevator
25 emergency stop of the present invention;

FIG. 19 is a cross-sectional view of yet another device for elevator emergency stop of the present

invention;

FIG. 20 gives characteristic curves showing the change in the coefficient of friction of composite materials for braking piece of Example 1 of the present invention and of Comparative Example 1, respectively, in the period from the start of friction to stop;

FIG. 21 gives characteristic curves showing the change in the coefficient of friction of composite materials for braking piece of Example 58 of the present invention and of Comparative Example 19, respectively, in the period from the start of friction to stop;

FIG. 22 shows the relative wear amounts after test of pin-like test pieces comprising composite materials for braking piece of Example 58 of the present invention and of Comparative Example 19, respectively;

FIG. 23A is a front view of test member employed in Examples 66 to 94;

FIG. 23B is a cross-sectional view taken through reference line XXIII B - XXIII B of FIG. 23A;

FIG. 24A is a front view of another test member employed in Examples 60 to 94;

FIG. 24B is a cross-sectional view taken through reference line XXIV B - XXIV B of FIG. 24A.

FIG. 25A is a front view of yet another test piece of members employed in Examples 60 to 94;

FIG. 25B is a cross-sectional view taken through

reference line XXVB - XXVB of FIG. 25A;

FIG. 26 gives characteristic curves showing the change in the coefficient of friction of composite materials for braking piece of Examples 95 and 96 of the present invention and of Comparative Example 19, respectively, in the period from the start of friction to stop; and

FIG. 27 shows the relative wear amounts after test of pin-like test pieces comprising composite materials for braking piece of Examples 95 and 96 of the present invention and of Comparative Example 19, respectively.

DETAILED DESCRIPTION OF THE INVENTION

Referring to FIGS. 1 to 4, an elevator with a device for emergency stop of the present invention is explained in detail below.

FIG. 1 is a schematic diagram of an elevator provided with a device for emergency stop, FIG. 2 is a view in the direction of the arrow A of the elevator of FIG. 1, FIG. 3 is a cross-sectional view of the device for emergency stop of the elevator of FIG. 1, and FIG. 4 is a cross-sectional view taken through reference line IV - IV of FIG. 3.

A pair of devices for emergency stop 1 are arranged symmetrically with respect to the right and left bottom parts of a cage 2, respectively. Ropes 3 of an elevating member (not shown) are attached to the upper plate of the cage 2. A pair of rails 4 are

positioned along the side of the cage 2, which is provided with the pair of devices for emergency stop 1, in the direction of vertical direction.

5 A speed adjuster rope 6 having an engaging member 5, which faces the side of the cage 2 and attached to the rope 6, is movably supported between a pulley 7 of under floor and a speed adjuster 8 to be placed on the roof or the like. A first lever 9 is engaged with the engaging member 5. A second lever 10, whose end is positioned on the right side of the cage 2, is linked to the first lever 9 via a long lever 11. Two pulling wires 12 have the top ends linked to the first lever 9. The lower ends of the pulling wires 12 are attached to a brake shoe, which will be described hereinbelow, of 15 the device for emergency stop 1 attached to the left bottom part of the cage 2. The lower ends of the pulling wires 13 are attached to a brake shoe, which will be described hereinbelow, of the device for emergency stop 1 attached to the right bottom part of 20 the cage 2. A gripping member 14 is positioned in the neighborhood of the speed adjuster 8.

If the speed adjuster 8 detects that the descending speed of the rope 6, which is linked to the cage 2 via the levers 9 and 10, exceeds a preset speed 25 because of the fall of the cage 2 as a result of the severance of the rope 3 due to a trouble of the elevator (not shown), the detecting signal is

transmitted to the gripping member 14 to cause it to grip the speed adjuster rope 6. When the speed adjuster rope 6 is gripped in the above-described way, the first lever 9 engaged with the engaging member 5 and the
5 second lever 10 engaged with the first lever 9 via the long lever 11, which is secured to a position midway within the length of the rope, pull the pulling wires 12 and 13 to thereby pull upward a pair of brake shoes of the device for emergency stop 1 which will be
10 described hereinbelow. The speed adjuster rope 6 having the engaging member 5, the pulley 7, the speed adjuster 8, the first and second levers 9 and 10, the long lever 11, the pulling wires 12 and 13, and the gripping member 14, all combined together, constitute a pulling
15 means.

As shown in FIGS. 2 to 4, the device for emergency stop 1 has an upper stopper plate 16 and lower stopper plate 17 which are fixed by a pair of supporting plates 15₁ and 15₂ facing each other. The central part of the
20 front surface of the stopper plates 16 and 17 are formed narrow and long grooves 18 and 19. The projections of the T-shaped rail 4 are fitted through the grooves 18 and 19. The under parts of both ends of the upper stopper plate 16 on the side of the
25 supporting plates 15₁ and 15₂ are formed cutaway parts 20₁ and 20₂, respectively. The upper parts of both ends of the lower stopper plate 17 on the side of the

supporting plates 15₁ and 15₂ are formed cutaway parts 21₁ and 21₂, respectively. Two beams 22₁ and 22₂ each have upper part and lower part outwardly right-angled, respectively, so that the upper part is linked to the
5 bottom surface of the cage 2 while the lower part is linked to the upper surface of the upper stopper plate 16.

A pair of guide members 23₁ and 23₂, which are each in the form of an inverse trapezoidal block, face
10 each other and arrange within the space defined by the supporting plates 15₁ and 15₂ and the upper and the lower stopper plate 16 and 17. Inner surfaces of the guide members 23₁ and 23₂ incline such that a gap between the guide members 23₁, and 23₂ gradually
15 decreases toward the upper ends of the guide members 23₁ and 23₂. The guide members 23₁ and 23₂ have projections 24₁ and 25₁ as well as 24₂ and 25₂ at upper ends as well as at lower ends, respectively, on the side facing the supporting plates 15₁ and 15₂. The
20 projections 24₁ and 25₁ as well as 24₂ and 25₂ engage with the cutaway parts 20₁ and 20₂, as well as with the cutaway parts 21₁ and 21₂, respectively, of the upper stopper plate 16 and of the lower stopper plate 17. This engagement allows the guide members 23₁ and 23₂ to
25 be positioned slidably on the under surface of the upper stopper plate 16 and on the upper surface of the lower stopper plate 17. An elastic member 27, which has

a U-shaped top and ends 26₁ and 26₂, each capable of opening, is inserted in such a manner that the inner surface in the neighborhood of the ends 26₁ and 26₂ abuts against the outer surfaces of the guide members 23₁ and 23₂ within the aforementioned space. The insertion of the elastic member 27 allows the elastic force of the ends 26₁ and 26₂ to act on the pair of guide members 23₁ and 23₂, thereby bringing the guide members 23₁ and 23₂ closer to each other. However, the guide members 23₁ and 23₂ cannot approach each other beyond a predetermined space therebetween because of the presence of the rising wall of the cutaway parts 20₁ and 20₂ as well as of the cutaway parts 21₁ and 21₂. Besides, because of the position of the guide members 23₁ and 23₂, a space in a shape similar to an inverse V letter is formed therebetween.

A pair of brake shoes 28₁ and 28₂ face each other between the guide members 23₁ and 23₂, and the under part of the brake shoes 28₁ and 28₂ are superposed on the lower stopper plate 17. The brake shoes 28₁ and 28₂ consist of a brake body 29₁ and 29₂, which are each in the form of a vertically extending square trapezoidal pole having a braking face, and braking pieces 30₁ and 30₂ which are each in the form of a narrow long plate and are embedded in the braking face side of the brake bodies 29₁ and 29₂. The brake shoes 28₁ and 28₂ are capable of moving vertically along the inner surfaces

of the guide members 23₁ and 23₂. Besides, a projected portion of the rail 4, which extends vertically and has a T-shaped cross section, is positioned between the brake shoes 28₁ and 28₂. The two pulling wires 13 are
5 attached to the lower part of the front surface of the brake shoes 28₁ and 28₂, respectively.

The brake bodies 29₁ and 29₂ are made of a material such as mild steel or cast iron.

The braking pieces 30₁ and 30₂ are made of
10 the following materials and have the following constructions.

(1 - 1) braking piece

The braking piece is made of a composite material containing a ceramic base material selected from the
15 group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and no less than 10 wt% of a ceramic material selected from the group consisting of a silicon carbide whisker and a silicon carbide platelet.

20 The amount of the ceramic material is specified as stated above, because where the amount of the ceramic material is less than 10 wt%, a higher level of the coefficient of friction and the prevention of the change with time of the coefficient of friction will
25 not be achieved, in comparison with the case of the neat ceramic base material. The upper limit of the amount of the ceramic material is preferably 40 wt%

which will not impair the compactness of the braking piece.

The silicon carbide whisker (needle-like) or silicon carbide platelet (plate-like) may be included alone in the ceramic base material. However, from the viewpoint of enhancing the coefficient of friction of the braking piece, a composite material containing both of silicon carbide whisker and silicon carbide platelet having different shapes is preferably employed.

(1 - 2) braking piece

The braking piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and a ceramic material selected from the group consisting of a silicon carbide whisker and a silicon carbide platelet, and at least one continuous fiber selected from the group consisting of silicon carbide, silicon nitride, carbon and tungsten. The amount of the ceramic material in the braking piece is no less than 10 wt%. In addition, the amount of the continuous fiber in the braking piece is 10 to 55 vol%.

The continuous fibers preferably have a diameter in the range of 10 to 150 μm . However, the length of the continuous fibers may be chosen at will depending on the size of the braking piece.

The amount of the continuous fibers is defined in

the above range for the reasons explained below. If the amount of the continuous fibers in the braking piece is less than 10 vol%, the enhancement of the coefficient of friction and the prevention of the change with time of the coefficient of friction become difficult. On the other hand, if the amount of the continuous fibers in the braking piece exceeds 55 vol%, the strength of the ceramic base material (is undesirably reduce), and the ceramic base material of the braking piece may crack when the brake shoes, come into a sliding contact with a rail. Most preferably, the amount of the continuous fibers is 15 to 30 vol% in the braking piece.

(1 - 3) braking piece

As shown in FIGS. 5A and 5B, the braking piece 30₁ (30₂) has a construction where a number of ceramic fibers 32 are embedded in a plate-like ceramic base material 31 in such a manner that the ceramic fibers are vertically disposed at the surface of the ceramic base material 31 (i.e., the surface constituting the braking face of the brake shoes 28₁ and 28₂ of FIG. 3 as previously mentioned) and exposed to the surface of the ceramic base material 31.

(1 - 4) braking piece

As shown in FIGS. 6A and 6B, the braking piece 30₁ (32₂) has a construction where bundles 33 of ceramic fibers are embedded in a plate-like ceramic base material 31 in such a manner that the bundles of fibers

are vertically disposed at the surface of the ceramic base material 31 (i.e., the surface constituting the braking face of the brake shoes 28₁ and 28₂ of FIG. 3 as previously mentioned) and exposed to the surface of
5 the ceramic base material 31.

The ceramic base material to be used for the aforementioned braking piece (1 - 3) or (1 - 4) is comprised, for example, of silicon nitride, sialon or silicon carbide. Although the sialon may be α -sialon
10 or β -sialon, preferably the sialon is β -sialon represented by $\text{Si}_{6-z}\text{Al}_z\text{N}_{8-z}$ ($0 < z \leq 4.2$). Besides, the ceramic base material may be reinforced by embedding therein whiskers, platelets or continuous fibers made of such ceramics as silicon carbide.

15 The ceramic fibers to be used for the aforementioned braking piece (1 - 3) or (1 - 4) are comprised, for example, of silicon carbide.

Referring now to FIGS. 3 and 4 and also to FIG. 7, the function of the device for emergency stop incorporated into an elevator of FIGS. 1 and 2 is explained
20 below.

As shown in FIGS. 3 and 4, while the elevator is operated in a normal way, the braking faces of a pair of brake shoes 28₁ and 28₂ are positioned holding
25 a predetermined distance from the projected portion of the rail 4. Because of this positioning, the slowing down of the cage 2 by means of the device for elevator

emergency stop is not effected.

Meanwhile, if the rope 3 of FIG. 1 is cut due to the trouble of the elevator, a so-called emergency state occurs where the cage 2, which will be elevated by the rope 3, will fall. As the cage 2 falls, the speed adjuster rope 6, which is linked to the cage 2 via the levers 9 and 10, also descend. When the speed adjuster 8 detects that the descending speed of the rope 6 exceeds a preset speed, the detecting signal is transmitted to the gripping member 14 to cause it to grip the speed adjuster rope 6. If the speed adjuster rope 6 is gripped in the above-described way, the first lever 9 and the second lever 10 each engaged with the engaging member 5, which is secured to a position midway within the length of the rope, pull the pulling wires 12 and 13. If the pulling wires 12 and 13 are pulled, as shown in FIG. 7, each of the brake shoes 28₁ and 28₂ of a pair of devices for emergency stop is pulled upward along the inclined inner surface of the guide members 23₁ and 23₂ resisting the elastic force that tends to bring the ends 26₁ and 26₂ closer to each other. As the brake shoes 28₁ and 28₂ are pulled upward, a force will be generated by which the braking surfaces pinch the projected portion of the rail 4 because the distance between the brake shoes becomes so small that the opposed surfaces (braking faces) contact the projected portion of the rail 4 and the counteraction

of the elastic member 27 adds to the pinching force. Since braking parts 30₁ and 30₂ are formed in the braking face of the brake shoes 28₁ and 28₂, because of the pinching hold of the projected portion of the rail
5 4 by means of the brake shoes 28₁ and 28₂, a frictional force will be generated between the braking pieces 30₁ and 30₂ and the projected portion of the rail 4, which will slow down and stop the falling cage 2.

It is possible to provide a braking piece which
10 has a heat resistance to a temperature that exceeds 1000°C as well as a stabilized high coefficient of friction and an excellent seizure-resistance to rails and to inhibit the change with time of the coefficient of friction by forming the braking pieces 30₁ and 30₂,
15 which come into a sliding contact with the rail 4 in the process of slowing down and stop of the cage 2 by means of the device for elevator emergency stop 1, with a composite material containing a ceramic base material selected from the group consisting of silicon nitride,
20 titanium boride, sialon and silicon carbide, and no less than 10 wt% of a ceramic material selected from the group consisting of a silicon carbide whisker and a silicon carbide platelet, as explained in (1 - 1).

That is, if a braking piece is formed with a neat
25 ceramic material, the sliding between the ceramic material and the projected portion of the rail improves the compatibility between the ceramic material and the

material of the rail to such an extent that a sort of lubricating effect emerges. On the contrary, by forming the braking piece with a composite material containing a ceramic base material with a silicon carbide whisker or a silicon carbide platelet, which has a very high anisotropy unlike the ceramic base material, as illustrated in the present invention, it is possible to provide a braking piece which has a heat resistance to a temperature that exceeds 1000°C as well as a stabilized high coefficient of friction and an excellent seizure-resistance to rails, to prevent the development of a lubricating effect between the rail and the sliding face of the braking piece and to inhibit the change with time of the coefficient of friction. As a result, the device for elevator emergency stop 1, which is provided with the brake shoes 28₁ and 28₂ having the braking pieces 30₁ and 30₂ as described in (1 - 1), can surely slow down and stop the falling cage 2 in the case of emergency where the rope 3 is cut due to the trouble of the elevator.

Further, it is possible to provide a braking piece which has a heat resistance to a temperature that exceeds 1000°C and an excellent seizure-resistance to rails and to reinforce the ceramic base material with the continuous fibers as explained in (1 - 2). As a result, the device for elevator emergency stop 1, which is provided with the brake shoes 28₁ and 28₂ having the

braking pieces 30₁ and 30₂ as described hereinabove,
can surely slow down and stop the falling cage 2 in the
case of emergency where the rope 3 is cut due to the
trouble of the elevator, without developing crack in
5 the ceramic base material of the braking pieces 30₁ and
30₂ which comes into a sliding contact with the rail 4.

Still further, as shown in FIGS. 5A and 5B, the
braking pieces 30₁ and 32₂ have a construction where
ceramic fibers 32 are vertically embedded in a plate-
10 like ceramic base material 31 in such a manner that the
ceramic fibers are exposed to the surface of the
ceramic base material 31. By use of such a construction,
it is possible to provide a braking piece which has a
heat resistance to a temperature that exceeds 1000°C and
15 an excellent seizure-resistance to rails and to
maintain a stabilized friction property. Because a
number of ceramic fibers of very small diameter exposed
to the surface exhibit the same effect as embedded hard
particles. Therefore, the rail is not damaged unlike
20 the case where the detached hard particles damage the
rail. Particularly, as shown in FIGS. 6A and 6B, the
braking pieces 30₁ and 32₂, which have a construction
where bundles 33 of ceramic fibers are vertically
embedded in a plate-like ceramic base material 31 in
25 such a manner that the bundles of fibers are exposed to
the surface of the ceramic base material 31 as
explained in (1 - 4), do not damage the rail and .

exhibit a more stabilized friction/wear property.

Accordingly, the device for elevator emergency stop 1, which is provided with the brake shoes 28₁ and 28₂

having the braking pieces 30₁ and 30₂ as described

5 hereinabove, can surely slow down and stop the falling cage 2 in the case of emergency where the rope 3 is cut due to the trouble of the elevator.

The brake shoes (1 - 1) to (1 - 4) described above have high toughness and high coefficient of friction.

10 They therefore exhibit as much braking property as the conventional brake shoes even if the elastic member exerts a relatively small force on them. Hence, the elastic member can be made smaller, and the elevator emergency stop 1 can be manufactured at low cost.

15 Referring now to FIG. 8, another device for emergency stop to be incorporated into an elevator of FIGS. 1 and 2 is explained in detail below. In the following description, the same elements as those mentioned in FIG. 3 are given the same symbols and the
20 explanation for them is omitted.

The device for emergency stop 41 of FIG. 8 has, between guide members 23₁ and 23₂, a pair of brake shoes 41₁ and 42₂ which face each other and the under part of which is superposed on the lower stopper plate
25 17. The brake shoes 41₁ and 42₂ each comprise a brake body 43 having a braking face and a plurality of braking pieces 44 which are embedded in the braking

face of the body 43 in such a manner that the braking
pieces 44 project from the braking face of the brake
body. The projection of each of the braking pieces is
in the form of a column or a multi-cornered pole having
5 rounded corners.

The brake body 43 is made of, for example, a
material such as mild steel or cast iron.

The brake shoes 42₁ and 42₂ have, for example, the
following (2 - 1) - (2 - 4) constructions.

10 (2 - 1) brake shoe

As illustrated in FIGS. 9A and 9B, the brake shoe
42₁ (42₂) comprises metal brake body 43 having a
rectangular cavity 45 on a braking face side. The brake
body 43 has three vertical lateral faces, including the
15 braking face, in a form of a square trapezoid. A
rectangular metal supporting block 47, which has plural,
for example 6, column-like through holes 46, is
embedded in the cavity 45 of the body 43 via a heat
resistant fibrous sheet 48 as a sheet-like buffering
20 material. The supporting block 47 is fixed to the body
43 by means of a screw 49. Plural, for example 6,
column-like braking pieces 44, are inserted into the
through holes 46 of the supporting block 47 via a
cylindrical body 50 of a heat resistant long fiber in
25 such a manner that the braking pieces 44 project from
the surface of the supporting block 47. The braking
pieces 44 together with the cylindrical bodies 50 are

fixed inside the through holes 46 by means of an adhesive. The grooves of grid are formed in the front surface (braking face) of the braking pieces 44.

5 The brake body 43 and the supporting block 47 are made of, for example, a metal such as a stainless steel or a heat resistant alloy.

10 The braking piece 44 are made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, silicon carbide and sialon, and particles of at least one ceramic material selected from the group consisting of a carbide, such as titanium carbide or tungsten carbide, a nitride, such as a titanium nitride, and a boride, such as titanium boride. The ceramic particles have an
15 average particle size in the range of 10 to 150 μm and dispersed into the ceramic base material.

Although the ceramic particles may be dispersed throughout the braking piece, preferably the ceramic particles are dispersed in the surface layer including
20 the surface (braking face) of the braking piece. In such a braking piece, which has a surface layer made of a ceramic base material having ceramic particles dispersed therein, the surface (braking face) has a high coefficient of friction and an excellent impact
25 resistance. When dispersing the ceramic particles in the surface layer, preferably the ceramic particles are dispersed in the surface layer having a depth of 30% or

less of the total thickness from the surface. If such surface layer thickness exceeds 30% of the total thickness of the braking piece, the braking piece may be broken by the impact generated at the time of slowing down and stop. The minimal thickness of the surface layer is preferably 1% of the total thickness of the braking piece, because the surface layer will be easily peeled if the thickness of the surface layer is less than the depth of the grid-like grooves.

The amount of the ceramic particles dispersed into the ceramic base material is preferably in the range of from 5 to 30 wt%. Besides, in the case where the ceramic particles are dispersed in the surface layer of the braking piece, the amount of the ceramic particles is preferably in the range of from 5 to 30 wt% in the layer of the ceramic base material.

The average is defined in the above range for the reasons explained below. If the average particle size is less than 10 μm , it will be difficult to obtain the braking piece having a high coefficient of friction. On the other hand, if the average particle size exceeds 150 μm , the uniform dispersion of the ceramic particles is difficult and the strength of the braking piece will be reduced. Most preferably, the average particle size is in the range of 40 to 80 μm .

In the above-mentioned braking piece 44, the ceramic base material such as silicon nitride may be

further incorporated with a heat resistant fiber, such as silicon carbide fiber, tungsten fiber or carbon fiber, or with a short fiber such as silicon carbide whisker.

5 The projected height of each of braking piece 44 from the supporting block 47 is preferably 0.5 to 2 mm. If projected height of each braking piece 44 from the supporting block 47 is less than 0.5 mm, it will be difficult to fully exhibit the braking action to the
10 rail at the time of slowing down and stop. On the other hand, if projected height exceeds 2 mm, the braking piece may be broken by the impact at the time of slowing down and stop.

 In the braking piece 44, the ratio of maximal
15 length (L) to the thickness (T), i.e., (L/T), is preferably in the range of 0.5 to 10. Such a braking piece 44 will be capable of preventing more effectively the fracture by impact at the time of slowing down and stop.

20 The groove in the form of a grid to be formed on the surface (braking face) of each of the braking pieces 44 preferably has a depth of 0.1 to 0.5 mm and the grid preferably has a pitch of 0.5 to 5 mm. If the depth of the groove is less than 0.1 mm and the pitch
25 of the grid is more than 5 mm, it will be difficult to impart a sufficient enhancement of the coefficient of friction to the surface (braking face) of each of the

braking pieces 44 by the formation of the grid. On the other hand, if the depth of the groove is more than 0.5 mm and the pitch of the grid is less than 0.5 mm, the impact resistance of each of the braking pieces 44 may be reduced.

Examples of the heat resistant long fiber, which constitutes the sheet 48 and the cylindrical body 50, include a two-dimensional fiber of silicon carbide or carbon.

10 (2 - 2) brake shoe

As illustrated in FIGS. 10A and 10B, the brake shoe 42₁ (42₂) has a metal brake body 43 having a rectangular cavity 45 on the braking face side. The metal brake body 43 has three vertical lateral faces, including the braking face, in a form of a square trapezoid. A rectangular metal supporting block 47 is embedded in the cavity 45 of the body 43. The supporting block 47 has plural, for example 6, column-like holes 51. The portion of the supporting block 47, which forms the bottom of the holes 51, has small holes 52 which will hold screws that will be described hereinbelow. Metal screws 54 run the brake body 43 through the small holes 52 of the supporting block 47, respectively, so that the supporting block 47 is fixed to the body 43. Plural, for example 6, cylindrical bodies 53, which have a bottom and made of a heat resistant long fiber, are inserted into each of the

column-like holes 52 of the body 43. Plural, for example 6, column-like braking pieces 44 are respectively inserted into the cylindrical bodies 53 having a bottom inside the holes 54 of the supporting block 47 in such a manner that the braking pieces project from the surface of the supporting block 47. The grid-like grooves are formed on the front surface (braking face) of each of the braking pieces 44.

The body 43 and the supporting block 47 are made of the same metal as in the case of (2 - 1).

The construction of each of the braking pieces 44 is the same as in the case of (2 - 1).

The projected height of each braking pieces 44 from the supporting block 47 is preferably 0.5 to 2 mm because of the same reason as in the case of (2 - 1).

The groove in the form of a grid to be formed on the surface (braking face) of each of the braking pieces 44 preferably has a depth of 0.1 to 0.5 mm and the grid preferably has a pitch of 0.5 to 5 mm because of the same reason as in the case of (2 - 1).

Examples of the heat resistant long fiber, which constitutes the cylindrical body 53 having a bottom, include a silicon carbide long fiber.

(2 - 3) brake shoe

As illustrated in FIGS. 11A and 11B, the brake shoe 42₁ (42₂) has a metal brake body 43 having a rectangular cavity 45 on the braking face side. The

metal brake body 43 has three vertical lateral faces, including the braking face, in a form of a square trapezoid. A rectangular metal supporting block 47 is embedded in the cavity 45 of the body 43. The

5 supporting block 47 is fixed to the body 43 by means of a screw 49. The supporting block 47 has plural, for example 6, column-like holes 52, which communicate with each other by means of a flow passageway 55. A disk-like metal plate 56 is fixed to the middle of the

10 column-like hole 52 of the supporting block by means of an adhesive. A liquid, for example an oil 57 for hydraulic equipment, is accommodated in the column-like hole 52 and in the flow passageway 55 opposite to the braking face, utilizing the metal plate 56 as a

15 boundary. That is, the metal plate 56 is used in order to seal the oil 57 into the column-like hole 52 and the flow passageway 55. Plural, for example 6, column-like braking pieces 44 are each inserted into the holes 52 of the supporting block 47 in such a manner that the

20 braking pieces 44 project from the surface of the supporting block 47. The braking pieces 44 are each fixed inside the hole 52 by means of an adhesive. The grooves of grid are formed in the front surface (braking face) of the braking pieces 44.

25 The body 43 and the supporting block 47 are made of the same metal as in the case of (2 - 1).

The construction of each of the braking pieces 44

is the same as in the case of (2 - 1).

The projected height of each braking pieces 44 from the supporting block 47 is preferably 0.5 to 2 mm because of the same reason as in the case of (2 - 1).

5 The groove in the form of a grid to be formed on the surface (braking face) of each of the braking pieces 44 preferably has a depth of 0.1 to 0.5 mm, and the grid preferably has a pitch of 0.5 to 5 mm because of the same reason as in the case of (2 - 1).

10 (2 - 4) brake shoe

As illustrated in FIGS. 12A and 12B, the brake shoe 42₁ (42₂) has a metal brake body 43 having a rectangular cavity 45 on the braking face side. The metal brake body 43 has three vertical lateral faces, including the braking face, in a form of a square trapezoid. A rectangular metal supporting block 47, which has plural, for example 5, conical trapezoid holes 58, is embedded in the cavity 45 of the body 43 via a heat resistant long-fiber sheet 48. Meanwhile, 15 braking pieces 59 in the form of a conical trapezoid, are each inserted into the conical trapezoid holes 58 from the back of the supporting block 47 via a conical cylinder body 60 made of a heat resistant long fiber. The supporting block 47 is fixed to the body 43 by 25 means of a screw 49. As a result of the fixation of the supporting block 47 in the above-described way, each of the braking pieces 59 projects from the surface of the

supporting block 47 by a desired length. The grooves of grid are formed in the front surface (braking face) of the braking pieces 59.

5 The body 43 and the supporting block 47 are made of the same metal as in the case of (2 - 1).

The construction of each of the braking pieces 59 is the same as in the case of (2 - 1).

10 The projected height of each braking piece 59 from the supporting block 47 is preferably 0.5 to 2 mm because of the same reason as in the case of (2 - 1).

15 The groove in the form of a grid to be formed on the surface (braking face) of each of the braking pieces 59 preferably has a depth of 0.1 to 0.5 mm and the grid preferably has a pitch of 0.5 to 5 mm because of the same reason as in the case of (2 - 1).

Examples of the heat resistant long fiber, which constitutes the sheet 48 and the conical cylinder body 60, include a silicon carbide long fiber.

20 In the case of the brake shoes (2 - 1) - (2 - 3), the braking piece may be in the form of a cornered-pole such as 3-cornered, square, 5-cornered or 6-cornered pole having the corner rounded.

25 In the case of the brake shoes (2 - 4), the braking piece may be in the form of a cornered-cone such as 3-cornered, square, 5-cornered or 6-cornered cone having the corner rounded.

In the case of the brake shoes (2 - 1), (2 - 2)

and (2 - 4), a heat resistant long fiber constituting a buffering material may be placed only on the back side of the braking piece.

Further, in the case of the brake shoes (2 - 4),
5 the braking piece in the form of a conical trapezoid may take a construction where screw threads are formed on the bottom part as illustrated in FIG. 11A and 11B or a construction where a metal supporting block contains a liquid.

10 Still further, in the case of the brake shoes (2 - 1) - (2 - 3), the braking piece may take a construction where a number of pyramid-shaped projections 61 are arranged in the front face (braking face) as illustrated in FIGS. 13A and 13B or a
15 construction where a number of semi-cylindrical projections 62 are arranged in a right angle to the direction of slide on the rail. Also in the braking piece to be used for the brake shoe (2 - 4), a construction may be taken where a number of pyramid-
20 shaped or semi-cylindrical projections are arranged in the front surface (braking face).

The height of the projection is preferably no greater than 1 mm. If the height of the projection exceeds 1 mm, a brake shoe having such projections is
25 brought into a sliding contact with a rail at the time of slowing down and stop, the root of the projection may be fractured and the projection may be detached.

Most preferably, the height of the projection is in the range of 0.2 to 0.5 mm.

Referring now to FIGS. 8 and 15, the function of a device for emergency stop, which is incorporated into the elevator of FIGS. 1 and 2, is explained below.

While the elevator is operated in a normal way, the opposed surfaces of a pair of brake shoes 42_1 and 42_2 are positioned with a certain distance from the projected part of the rail 4. Accordingly, the device for elevator emergency stop 41 does not function to slow down and stop the cage 2.

Meanwhile, if the rope 3 of FIG. 1 is cut due to trouble of the elevator, an emergency happens to cause the cage 2 elevated or lowered by the rope 3 to fall. As the cage 2 falls, the speed adjuster rope, which is linked to the cage via the levers 9 and 10, also descends. If the speed adjuster 8 detects that the descending speed of the rope 6 exceeds a preset speed, the detecting signal is transmitted to the gripping member 14 to cause it to grip the speed adjuster rope 6. If the speed adjuster rope 6 is gripped in the above-described way, the first lever 9 and the second lever 10 each engaged with the engaging member 5, which is secured to a position midway within the length of the rope, pull the pulling wires 12 and 13. If the pulling wires 12 and 13 are pulled, this action will cause a pair of brake shoes shoe 42_1 and 42_2 of the device

for emergency stop 41 as shown in FIG. 15 to be pulled upward along the inclined surface of the guide members 23₁ and 23₂ resisting the elastic force that tends to bring the ends 26₁ and 26₂ closer to each other. As the
5 brake shoes 42₁ and 42₂ are pulled upward, a force will be generated by which the braking faces pinch the projected portion of the rail 4 because the distance between the brake shoes becomes so small that the opposed surfaces (braking faces) contact the projected
10 portion of the rail 4 and the counteraction of the elastic member 27 adds to the pinching force. Since a plurality of braking pieces 44 project from the braking face of the brake shoes 42₁ and 42₂, the pinching hold of the projected portion by means of the brake shoes
15 42₁ and 42₂ will create a frictional force so that the falling cage 2 will slow down and stop.

The brake shoes 42₁ and 42₂, which are brought into a sliding contact with the rail in the process of slowing down and stopping of the cage 2 by means of the
20 device for elevator emergency stop 41, are constructed such that a plurality of column-like braking pieces 44 project from the surface of the supporting block 43 via a metal supporting block 47 on the braking face side of the brake body 43, as illustrated in FIGS. 9A and 9B in
25 previous section (2 - 1). Each of the braking pieces 44 is made of a composite material containing a ceramic base material selected from the group consisting of

silicon nitride, silicon carbide and sialon, and particles of at least one ceramic material selected from the group consisting of a carbide, a nitride and a boride, which have particle sizes in the range of 10 to 150 μm , and are dispersed into the ceramic base material. Owing to this construction of the braking piece 44, it is possible to provide a braking piece which has a heat resistance to a temperature that exceeds 1000°C as well as a stabilized high coefficient of friction at the projections under a condition of high speed and high stress and to prevent the fracture by impact at the time of slowing down and stop. Because of this, a sufficient braking action to rail can be exerted at the time of slowing down and stop.

That is, the braking piece 44, which is made of a composite material contacting a ceramic base material such as silicon nitride and particles of ceramic material such as titanium carbide deposited into the ceramic base material, makes it possible to exhibit a heat resistance to a temperature that exceeds 1000°C as well as a stabilized high coefficient of friction under a condition of high speed and high stress at the time when a slide takes place between the projected portion of rail and the braking piece. Particularly, if the ceramic particles are dispersed in the surface layer (e.g., the surface layer having a depth up to 30% of the total thickness) in the composite material, the

surface (braking face) of the braking piece has a high coefficient of friction and an excellent impact resistance. Besides, since the braking pieces 44 each have a shape of a column and are each independently
5 secured to the body 43 by means of the supporting block 47, it is possible to relax the stress concentration for the prevention of the fracture such as cracking and to limit the cracking to a constituent member of the braking pieces 44. As a result, the device for elevator
10 emergency stop 41, which is provided with the brake shoes 42₁ and 42₂ described in (2 - 1), can surely slow down and stop the falling cage 2 in an emergency where the rope is cut due to the trouble of elevator, because the braking pieces 44 have a high coefficient of
15 friction and a high cracking resistance due to a plurality of members constituting the braking pieces 44.

Further, the fracture of the braking pieces 44 can be more surely prevented, if a sheet 48 or a cylindrical body 50, which is made of a heat resistant
20 long fiber such as a two-dimensional fiber of silicon carbide, is provided to the braking piece 44 on the side facing the body 43 and the periphery of the braking piece, because the sheet 48 and the cylindrical body 50 can absorb the impact on the braking piece 44
25 at the time of slowing down and stop. As a result, the device for elevator emergency stop 41, which is provided with the brake shoes 42₁ and 42₂ prepared in

the above-described manner, can more surely slow down and stop the falling cage 2 in an emergency where the rope is cut due to the trouble of elevator.

Further, it is possible to enhance the coefficient
5 of friction and to effectively discharge the residue of friction product and the friction heat by adopting the construction of the braking piece 44 where the surface (braking face) of the braking piece 44 has a grid-shaped grooves having a depth of 0.1 to 0.5 mm and a
10 pitch of 0.5 to 5 mm or has projections. As a result, the device for elevator emergency stop 41, which are provided with the brake shoes 42₁ and 42₂ in the above-described, can more surely slow down and stop the falling cage 2 in an emergency where the rope is cut
15 due to the trouble of elevator.

The brake shoe 42₁ (42₂), as illustrated in FIGS. 10A and 10B described in (2 - 2), has the same effect as mentioned in the above, and, in addition, can more effectively fix the braking pieces 44 by inserting
20 into the cylindrical bodies 53 made of a heat resistant log fiber, respectively.

As illustrated in FIGS. 11A and 11B in (2 - 3), the brake shoe 42₁ (42₂) has a construction where the supporting block 47 has plural column-like holes 52 and
25 a passageway 55, which communicates with the holes, filled with a liquid, for example an oil 57 for hydraulic equipment, in such a manner that a metal

plate 56 in the middle of the column-like hole 52 seals the liquid and the braking piece 44 is fixed inside the column-like hole 52 by means of an adhesive. Because of this construction, when the braking piece 44 and the
5 rail 4 are brought into a sliding contact with each other, a pressing force applied to one of the braking pieces 44 serves as a force that presses other braking piece 44 to the projected portion of the rail via the liquid 57. In other words, it becomes possible to bring
10 all of the braking pieces 44 of the supporting block 47 into a uniform sliding contact with the projected portion of the rail. As a result, all of the plural braking pieces 44 exert a braking action to the projected portion of the rail 4. Therefore, the device
15 for elevator emergency stop 41, which is provided with the brake shoes 42₁ and 42₂ having a plurality of the braking pieces 44, can more surely slow down and stop the falling cage 2 in an emergency where the rope is cut due to the trouble of elevator.

20 The brake shoe 42₁ (42₂), as illustrated in FIGS. 12A and 12B described in (2 - 4), has the same effect as mentioned in the above, and, in addition, can more surely prevent the ejection of the braking pieces
25 braking pieces 59 each in the form of a conical trapezoid are fixed to the body 43 by means of a rectangular metal supporting block 47 having conical

trapezoid holes 58.

The brake shoes (2 - 1) to (2 - 3) described above have high toughness and high coefficient of friction. They therefore exhibit as much braking property as the
5 conventional brake shoes even if the elastic member exerts a relatively small force on them. Hence, the elastic member can be made smaller, and the elevator emergency stop 41 can be manufactured at low cost.

The coefficient of friction which the conventional
10 brake shoes have with respect to the rail is too low for the shoes to stop the elevator cage being moved up or down at 1250 m/min by the elevating means. To stop the cage moving at such a high speed, the elevator emergency stop needs to incorporate an elastic member
15 which is shaped like a coil and which exerts a greater force than the above-mentioned U-shape leaf spring. However, a coil-shaped elastic member is larger and heavier than the leaf spring. Consequently, the elevator emergency stop will become heavier if it
20 incorporates a coil-shaped elastic member. Further, the rope supporting the cage to which the elastic member is attached must be thicker and proportionally heavier. More electric power will inevitably be consumed to operate the elevator if the emergency stop incorporated
25 in the elevator has a coil-shaped elastic member.

The brake shoes provided in the elevator emergency stop according to the invention have a coefficient of

friction with respect to the rail, which is so high that the shoes can stop the cage moving at 1250 m/min. Since the shoes have such a high coefficient of friction, the elastic member incorporated in the
5 elevator emergency stop can be a small, light U-shaped leaf spring. Thus, the elastic member can be light, and the rope supporting the cage to which the elastic member is secured can be light. As a result, the elevator of the invention which incorporates the
10 emergency stop can operate at a reduced consumption of electric power.

Referring now to FIGS. 16 and 17, still another device for emergency stop to be incorporated into an elevator of FIGS. 1 and 2 is explained in detail below.
15 In the following description, the same elements as those mentioned in FIG. 3 are given the same symbols and the explanation for them is omitted.

The device for emergency stop 71 of FIG. 16 has, within a space defined by a pair of supporting plates
20. 15₁ and 15₂ and by a pair of stopper plates 16 and 17, an elastic member 73 inserted in such a manner that the inner surface in the neighborhood of the ends 72₁ and 72₂ abuts against the outer lateral side of the guide members 23₁ and 23₂. As illustrated in FIG. 17, the
25 elastic member 73 has a U-shaped top and ends 72₁ and 72₂ opening outwardly at the lower part so that the elastic force of the ends 72₁ and 72₂ for pressing the

guide members 23₁ and 23₂ becomes larger as the upper
portion of each of the guide members 23₁ and 23₂. A
pair of brake shoes 74₁ and 74₂, face each other
between the guide members 23₁ and 23₂ and the under
5 part of the brake shoes 74₁ and 74₂ is superposed on
the lower stopper plate 17. Each of the brake shoes 74₁
and 74₂ has a braking face extending in a vertical
direction and a shape of a square trapezoidal pole.

Although the brake shoes 74₁ and 74₂ may take any
10 construction where a material having a braking effect
is placed on the braking face side, particularly
preferred is the construction where the brake body has
a braking piece described in (1 - 1) to (1 - 4) on the
braking face side or the construction described in
15 (2 - 1) to (2 - 4).

Referring now to FIGS. 16 and 17 and also to
FIG. 18, the function of the device for emergency stop
incorporated into an elevator of FIG. 1 and 2 is
explained below.

20 As shown in FIG. 16, while the elevator is
operated in a normal way, the opposed braking faces of
a pair of brake shoes 74₁ and 74₂ are positioned
holding a predetermined distance from the projection of
the rail 4. Because of this positioning, the slowing
25 down of the cage 2 by means of the device for elevator
emergency stop is not effected.

Meanwhile, if the rope 3 of FIG. 1 is cut due to

the trouble of the elevator, a so-called emergency state occurs where the cage 2, which will be elevated by the rope 3, will fall. As the cage 2 falls, the speed adjuster rope 6, which is linked to the cage 2 via the levers 9 and 10, also descends. If the speed adjuster 8 detects that the descending speed of the rope 6 exceeds a preset speed, the detecting signal is transmitted to the gripping member 14 to cause it to grip the speed adjuster rope 6. If the speed adjuster rope 6 is gripped in the above-described way, the first lever 9 and the second lever 10 each engaged with the engaging member 5, which is secured to a position midway within the length of the rope, pull the pulling wires 12 and 13.

If the pulling wires 12 and 13 are pulled, as shown in FIG. 18, a pair of the brake shoes 74₁ and 74₂ of a pair of devices for emergency stop 71 are pulled upward along the inclined surface of the guide members 23₁ and 23₂ resisting the elastic force that tends to bring the ends 72₁ and 72₂ closer to each other. As the brake shoes 74₁ and 74₂ are pulled upward, a force will be generated by which the braking faces pinch the projected portion of the rail 4 because the distance between the brake shoes 74₁ and 74₂ becomes so small that the opposed surfaces (braking faces) contact the projected portion of the rail 4 and the counteraction of the elastic member 73 adds to the pinching force. In

this case, if the elastic force by the elastic member to the guide members 23₁ and 23₂ is uniform, the moment of force to be applied to the rail 4 for pulling up the brake shoes 74₁ and 74₂ may be localized to the lower
5 part thereof. For this reason, the area, which actually contributes to the sliding on the rail, of the brake shoes 74₁ and 74₂ may decrease.

From the above-mentioned viewpoint, as illustrated in FIG. 17, the use of the elastic member 73, which has
10 a U-shaped top and a lower part at the ends 72₁ and 72₂ opened outwardly so that the elastic force of the ends 72₁ and 72₂ for pressing the guide members 23₁ and 23₂ becomes larger as the upper portion of each of the guide members 23₁ and 23₂, makes it possible to provide
15 a pressing force by the guide members 23₁ and 23₂ to the brake shoes 74₁ and 74₂ which are being pulled upward in such a manner that the pressing force becomes larger as the pressing point rises. Accordingly, the projected portion of the rail 4 can be pinched by the
20 entire braking faces of the brake shoes 74₁ and 74₂ to generate a large frictional force between the brake shoes 74₁ and 74₂ and the projected portion of the rail 4 and thus the falling cage 2 can be slowed down and stopped.

25 The incorporation into a device for emergency stop 71 of the elastic member 73, which is constructed such that the elastic force of the ends 72₁ and 72₂ for

pressing the guide members 23₁ and 23₂ becomes larger as the upper portion of each of the guide members 23₁ and 23₂, make it possible to enlarge the area between the brake shoes 74₁ and 74₂ and the projected portion of the rail 4. Therefore the frictional force between the brake shoes 74₁ and 74₂ and the projected portion of the rail 4 increases, or the elastic member 73 may be downsized if the same sliding property as hitherto is required.

10 The device for emergency stop prepared by the incorporation therein of an elastic member, which is constructed such that the pressing force becomes larger as the pressing point rises, is not limited to the construction illustrated in FIG. 16. And, the outside of guide member may be provided with a plurality of elastic members in such a manner that a larger elastic force is exerted as the pressing point rises. For example, as illustrated in FIG. 19, a device for emergency stop 81 may be prepared by inserting into a space defined by a pair of supporting plates 15₁ and 15₂ and by a pair of stopper plates 16 and 17, a first elastic member 76 having a U-shaped top and ends 75₁ and 75₂ capable of opening. The inner surface in the neighborhood of the ends 75₁ and 75₂ of the first elastic member 76 abuts against lower side of the outer lateral side of the guide members 23₁ and 23₂. A second elastic member 78 is inserted into the space in such

a manner that the inner surface in the neighborhood of the ends 77₁ and 77₂ against the upper side of the outer lateral side of the guide members 23₁ and 23₂. The second elastic member 78 has a U-shaped top, ends
5 77₁ and 77₂ capable of opening and an elastic force greater than that of the first elastic member 76.

In the device for emergency stop 81 having such a construction, where a first elastic member 76 is positioned on the lower side of the outer lateral side
10 of the guide members 23₁ and 23₂ and a second elastic member 78 which has an elastic force greater than that of the first elastic member 76 is positioned on the upper side of the surfaces of the guide members 23₁ and 23₂, if pressed by the elastic members 76 and 78, the
15 guide members 23₁ and 23₂ can provide against the brake shoes 74₁ and 74₂ a pressing force which becomes larger as the pressing point rises when the brake shoes 74₁ and 74₂ are pulled upward. Therefore, as in the case of the device for emergency stop 71 of FIG. 16, it is
20 possible to relax the moment of force to be applied to the rail 4 by the brake shoes 74₁ and 74₂ from concentration to the lower part thereof and it is possible to realize the state where the entire braking face of the brake shoes 74₁ and 74₂ is brought into a
25 sliding contact with the rail 4 thereby enabling a larger frictional force to be exerted between the brake shoes 74₁ and 74₂ and the rail 4.

Preferred embodiments of the present invention are given below.

Examples 1 - 32 and Comparative Examples 1 - 12

An inertial friction test was conducted by
5 bringing a composite material for braking piece, which consisted of a ceramic base material and silicon carbide whisker (SiCw) and/or silicon carbide platelet (SiCpl) as indicated in Tables 1 and 2, into a sliding contact with a rail. In this case the sialon
10 used as the ceramic base material was a β -sialon of $\text{Si}_{6-z}\text{Al}_2\text{N}_{8-z}$ ($0 < z \leq 4.2$) where z was 2, which was produced from a powder blend of Si_3N_4 , Al_2O_3 and AlN .

The inertial friction test was conducted in the following manner. Each material for braking pieces was
15 formed into a pin-shaped test piece (TP_1), while SS400 as a material for rail was formed into a disk-shaped test piece (TP_2). The test was conducted in such a manner that the tip of the test piece TP_1 was pressed against the circular face of a rotating test piece TP_2
20 and the measurements of pressing force, frictional force and number of rotations were conducted until the rotation slowed down and stopped and the correlation between the frictional speed and the coefficient of friction was investigated. The testing condition was
25 set up on the basis of a working condition of a device for emergency stop of elevator having a speed of 800 m/min and the load was chosen such that a facial

pressure of 20 MPa was created. Values of coefficient of friction at a frictional speed of 750 m/min immediately after the start of sliding and the values of coefficient of friction midway at a frictional speed of 400 m/min are indicated in Tables 1 and 2. In Tables 1 and 2, μ_{750} indicates values of coefficient of friction at a frictional speed of 750 m/min immediately after the start of sliding, while μ_{400} indicates values of friction measured midway at a frictional speed of 400 m/min.

In addition, the change in the coefficient of friction in the period of from the start of friction to stop was examined for the composite material for braking piece of Example 1 indicated in Table 1 and for the composite material for braking piece of Comparative Example 1 indicated in Table 2. And, the results are shown in FIG. 20.

Table 1

	Ceramic Base Material	SiCw (wt%)	SiCpl (wt%)	Coefficient of Friction	
				μ 750	μ 400
Example 1	Si ₃ N ₄	10.00	5.00	0.48	0.47
Example 2	Si ₃ N ₄	10.00	10.00	0.50	0.50
Example 3	Si ₃ N ₄	15.00	10.00	0.51	0.50
Example 4	Si ₃ N ₄	20.00	20.00	0.53	0.54
Example 5	Si ₃ N ₄	15.00	-	0.45	0.44
Example 6	Si ₃ N ₄	-	15.00	0.43	0.45
Example 7	Si ₃ N ₄	5.00	10.00	0.48	0.49
Example 8	Si ₃ N ₄	10.00	15.00	0.47	0.50
Example 9	TiB ₂	10.00	5.00	0.51	0.50
Example 10	TiB ₂	10.00	10.00	0.49	0.52
Example 11	TiB ₂	15.00	10.00	0.52	0.52
Example 12	TiB ₂	20.00	20.00	0.50	0.53
Example 13	TiB ₂	15.00	-	0.51	0.52
Example 14	TiB ₂	-	15.00	0.48	0.49
Example 15	TiB ₂	5.00	10.00	0.50	0.52
Example 16	TiB ₂	10.00	15.00	0.55	0.54
Example 17	SiC	10.00	5.00	0.47	0.47
Example 18	SiC	10.00	10.00	0.52	0.51
Example 19	SiC	15.00	10.00	0.50	0.49
Example 20	SiC	20.00	20.00	0.52	0.53
Example 21	SiC	15.00	-	0.48	0.47
Example 22	SiC	-	15.00	0.46	0.44
Example 23	SiC	5.00	10.00	0.48	0.50
Example 24	SiC	10.00	15.00	0.45	0.49

Table 2

	Ceramic Base Material	SiCw (wt%)	SiCpl (wt%)	Coefficient of Friction	
				μ 750	μ 400
Example 25	Sialon	10.00	5.00	0.52	0.53
Example 26	Sialon	10.00	10.00	0.55	0.55
Example 27	Sialon	15.00	10.00	0.54	0.54
Example 28	Sialon	20.00	20.00	0.55	0.53
Example 29	Sialon	15.00	-	0.53	0.51
Example 30	Sialon	-	15.00	0.53	0.54
Example 31	Sialon	5.00	10.00	0.55	0.55
Example 32	Sialon	10.00	15.00	0.55	0.52
Comparative Example 1	Si ₃ N ₄	5.00	5.00	0.43	0.31
Comparative Example 2	Si ₃ N ₄	-	10.00	0.40	0.28
Comparative Example 3	Si ₃ N ₄	5.00	-	0.41	0.30
Comparative Example 4	TiB ₂	10.00	5.00	0.48	0.28
Comparative Example 5	TiB ₂	-	10.00	0.45	0.30
Comparative Example 6	TiB ₂	5.00	-	0.47	0.32
Comparative Example 7	SiC	10.00	5.00	0.44	0.29
Comparative Example 8	SiC	-	10.00	0.44	0.30
Comparative Example 9	SiC	10.00	-	0.45	0.33
Comparative Example 10	Sialon	-	5.00	0.50	0.37
Comparative Example 11	Sialon	-	0.00	0.50	0.39
Comparative Example 12	Sialon	5.00	-	0.48	0.38

From Tables 1 and 2 and FIG. 20, it can be seen that all of the composite materials for braking piece of Examples 1 to 32 have high coefficients of friction, which do not change, and therefore have excellent frictional properties. Particularly, sialon has a high coefficient of friction even if it is used alone.

Further, pairs of brake shoes were prepared by arranging braking pieces, which were each made of the composite materials for braking piece of Examples 1 to 32, on the braking face side of a brake body made of ductile cast iron. The brake shoes were incorporated into the device for elevator emergency stop shown in FIGS. 1 to 4. Then, the state of emergency stop was observed by dropping the cage at a speed of 800 m/min by cutting the rope. As a result, because of the friction between a pair of brake shoe and the rail, the cage slowed down and stopped within the fall of 30 m.

Examples 33 - 57 and Comparative Examples 13 - 18

An inertial friction test was conducted by bringing a composite material for braking piece, which consisted of a ceramic base material and silicon carbide whisker (SiCw) and/or silicon carbide platelet (SiCpl), and fiber as indicated in Tables 3 and 4, into a sliding contact with a rail. Each material for braking pieces was formed into a pin-shaped test piece (TP₁), while SS400 as a material for rail was formed

into a disk-shaped test piece (TP₂). The test was conducted in such a manner that the tip of the test piece TP₁ was pressed against the circular face of a rotating test piece TP₂ and the measurements of pressing force, frictional force and number of rotations were conducted until the rotation slowed down and stopped and the correlation between the frictional speed and the coefficient of friction was investigated. The testing condition was set up on the basis of a working condition of a device for emergency stop of elevator having a speed of 800 m/min and the load was chosen such that a facial pressure of 100 MPa, which was the double of that of Example 1, was created. Values of coefficient of friction at a frictional speed of 750 m/min immediately after the start of sliding and the values of coefficient of friction midway at a frictional speed of 400 m/min are indicated in Tables 3 and 4. In Tables 3 and 4, μ_{750} indicates values of coefficient of friction at a frictional speed of 750 m/min immediately after the start of sliding, while μ_{400} indicates values of friction measured midway at a frictional speed of 400 m/min.

Table 3

	Ceramic Base Material	SiCw (wt%)	SiCpl (wt%)	Fiber; Figures written Brackets Indicate Incorporated Amounts (vol%) of Fibers	Coefficient of Friction		Crack Development
					μ 750	μ 400	
Example 33	Si ₃ N ₄	15.00	10.00	SiC(15)	0.50	0.48	None
Example 34	Si ₃ N ₄	15.00	10.00	SiC(30)	0.51	0.48	None
Example 35	Si ₃ N ₄	15.00	10.00	SiC(55)	0.51	0.47	None
Example 36	Si ₃ N ₄	15.00	10.00	Si ₃ N ₄ (15)	0.53	0.50	None
Example 37	Si ₃ N ₄	15.00	10.00	Si ₃ N ₄ (30)	0.49	0.49	None
Example 38	Si ₃ N ₄	15.00	10.00	Si ₃ N ₄ (55)	0.50	0.53	None
Example 39	Si ₃ N ₄	15.00	10.00	C(15)	0.52	0.52	None
Example 40	Si ₃ N ₄	15.00	10.00	C(30)	0.54	0.50	None
Example 41	Si ₃ N ₄	15.00	10.00	C(55)	0.47	0.51	None
Example 42	Si ₃ N ₄	15.00	10.00	W(15)	0.49	0.47	None
Example 43	Si ₃ N ₄	15.00	10.00	W(30)	0.51	0.49	None
Example 44	Si ₃ N ₄	15.00	10.00	W(55)	0.53	0.50	None
Example 45	Si ₃ N ₄	15.00	10.00	SiC(15) + Si ₃ N ₄ (15)	0.51	0.50	None
Example 46	Si ₃ N ₄	15.00	10.00	SiC(15) + C(15)	0.52	0.55	None
Example 47	Si ₃ N ₄	15.00	10.00	Si ₃ N ₄ (15) + W(15)	0.53	0.54	None
Example 48	Si ₃ N ₄	15.00	10.00	SiC(10) + Si ₃ N ₄ (10) + C(10)	0.55	0.57	None
Example 49	Si ₃ N ₄	15.00	10.00	SiC(10) + Si ₃ N ₄ (10) + C(10) + W(10)	0.59	0.60	None

Table 4

	Ceramic Base Material	SiCw (wt%)	SiCpl (wt%)	Fiber; Figures written Brackets Indicate Incorporated Amounts (vol%) of Fibers	Coefficient of Friction		Crack Development
					μ 750	μ 400	
Example 50	TiB ₂	15.00	10.00	SiC(30)	0.51	0.54	None
Example 51	TiB ₂	15.00	10.00	Si ₃ N ₄ (30)	0.52	0.51	None
Example 52	TiB ₂	15.00	10.00	C(30)	0.52	0.49	None
Example 53	TiB ₂	15.00	10.00	W(30)	0.47	0.50	None
Example 54	SiC	15.00	10.00	SiC(30)	0.50	0.49	None
Example 55	SiC	15.00	10.00	Si ₃ N ₄ (30)	0.53	0.48	None
Example 56	SiC	15.00	10.00	C(30)	0.55	0.55	None
Example 57	SiC	15.00	10.00	W(30)	0.51	0.50	None
Comparative Example 13	Si ₃ N ₄	15.00	10.00	SiC(60)	0.50	0.31	Presence
Comparative Example 14	Si ₃ N ₄	15.00	10.00	Si ₃ N ₄ (60)	0.51	0.22	Presence

(Continued)

Table 4

	Ceramic Base Material	SiCw (wt%)	SiCpl (wt%)	Fiber; Figures written Brackets Indicate Incorporated Amounts (vol%) of Fibers	Coefficient of Friction		Crack Development
					μ 750	μ 400	
Comparative Example 15	Si ₃ N ₄	15.00	10.00	C(60)	0.51	0.18	Presence
Comparative Example 16	Si ₃ N ₄	15.00	10.00	W(60)	0.51	0.35	Presence
Comparative Example 17	TiB ₂	15.00	10.00	SiC(60)	0.54	0.33	Presence
Comparative Example 18	SiC	15.00	10.00	SiC(60)	0.55	0.22	Presence

From Tables 3 and 4, it can be seen that all of the composite materials for braking piece of Examples 33 to 57 have high coefficients of friction, which do not change, and therefore have excellent frictional properties as well as good mechanical strength free of cracking.

Further, pairs of brake shoes were prepared by arranging braking pieces, which were each made of the composite materials for braking piece of Examples 33 to 57, on the braking face side of a brake body made of ductile cast iron. The brake shoes were incorporated into the device for elevator emergency stop shown in FIGS. 1 to 4. Then, the state of emergency stop was observed by dropping the cage at a speed of 800 m/min by cutting the rope. As a result, because of the friction between a pair of brake shoe and the rail, the cage slowed down and stopped within the fall of 30 m.

Example 58

A braking piece having a construction illustrated in FIGS. 5A and 5B was prepared in the following way. A silicon nitride powder contained 5 wt% Y_2O_3 and 2 wt% Al_2O_3 as sintering aids, was admixed with 30 wt% of a silicon carbide long fibers (SCS-6 available from TEXTRON Co., Ltd.), in such a manner that the fibers oriented vertical to the surface of the plate-like final product. Each of the long fibers has heat resistance to a temperature exceeding 1700°C and a high

coefficient of friction. The resultant powder was hot-pressed for one hour in a nitrogen atmosphere under a condition of 1700°C and 300 kg/cm² to manufacture a braking piece.

5 An inertial friction test was conducted by bringing the braking piece of Example 58 into a sliding contact with a rail. That is, a pin-shaped test piece (TP₁) for braking part was formed so that the silicon carbide long fibers are oriented vertical to the
10 surface of the tip, while SS400 as a material for rail was formed into a disk-shaped test piece (TP₂). The test was conducted in such a manner that the tip of the test piece TP₁ was pressed against the circular face of a rotating test piece TP₂ and the measurements of
15 pressing force, frictional force and number of rotations were conducted until the rotation slowed down and stopped and the relative wear amount after test of the pin-shaped test piece was investigated. The results are shown in FIGS. 21 and 22. The test conditions were
20 set up based on the working conditions of a device for emergency stop of an elevator having a speed of 800 m/min. FIGS. 21 and 22 show the change in the coefficient of friction in the period of from start of friction to stop and the relative wear amounts after
25 test of the pin-shaped test piece, respectively, obtained by conducting similar tests using a pin-shaped test piece TP₁ made of cast iron, FC250, as Comparative

Example 19.

From FIG. 21, it can be seen that, comparing with the material for braking piece of Comparative Example 19, the braking piece of Example 58 exhibits
5 a higher coefficient of friction from the point immediately after the start of friction and the coefficient becomes further stabilized in the period of from the start of the test to the stop. Also, based on FIG. 22, comparing with the material for braking piece
10 of Comparative Example 19, the braking piece of Example 19 exhibits better property with respect to the relative wear amount.

Further, a pair of brake shoes were prepared by arranging braking pieces of Example 58 on the braking
15 face side of a brake body made of ductile cast iron. The brake shoes were incorporated into the device for elevator emergency stop shown in FIGS. 1 to 4. Then, the state of emergency stop was observed by dropping the cage at a speed of 800 m/min by cutting the rope.
20 As a result, because of the friction between a pair of brake shoe and the rail, the cage slowed down and stopped within the fall of 30 m.

Example 59

A braking piece having a construction illustrated
25 in FIGS. 6A and 6B was prepared in the following way. A silicon nitride powder contained 5 wt% Y_2O_3 and 5 wt% $MgAl_2O_4$ as sintering aids was admixed with 30 wt% of

yarn made by bundling hundreds of Nicalon fibers
(available from Nippon Carbon Co., Ltd.) each having a
diameter of about 10 μm in such a manner that the yarn
oriented vertical to the surface of the plate-like
5 final product. The resultant powder was hot-pressed for
one hour in a nitrogen atmosphere under a condition of
1600°C and 300 kg/cm² to manufacture a braking piece.

An inertial friction test was conducted by
bringing the braking piece of Example 59 into a sliding
10 contact with a rail. That is, a pin-shaped test piece
(TP₁) for braking part was formed so that the yarn
oriented vertical to the surface of the tip, while
SS400 as a material for rail was formed into a disk-
shaped test piece (TP₂). The test was conducted in such
15 a manner that the tip of the test piece TP₁ was pressed
against the circular face of a rotating test piece TP₂
and the measurements of pressing force, frictional
force and number of rotations were conducted until the
rotation slowed down and stopped and the relative wear
20 amount after test of the pin-shaped test piece was
investigated. The results confirmed that a high
coefficient of friction and a low level of wear amount
were obtained as in the case of Example 58.

Further, a pair of brake shoes were prepared by
25 arranging braking pieces of Example 59 on the braking
face side of a brake body made of ductile cast iron.
The brake shoes were incorporated into the device for

elevator emergency stop shown in FIGS. 1 to 4. Then,
the state of emergency stop was observed by dropping
the cage at a speed of 800 m/min by cutting the rope.
As a result, because of the friction between a pair of
5 brake shoe and the rail, the cage slowed down and
stopped within the fall of 30 m.

Examples 60 - 74

FIG. 23A is a front view of a test member employed
in the following Examples 60 to 94. FIG. 23B is a
10 cross-sectional view taken through reference line
XXIIIIB - XXIIIIB of FIG. 23A. FIG. 24A is a front view
of another test member employed in the following
Examples 60 to 94. FIG. 24B is a cross-sectional view
taken through reference line XXIVB - XXIVB of FIG. 24A.
15 FIG. 25A is a front view of yet another test member
employed in Examples 60 to 94. And, FIG. 25B is a
cross-sectional view taken through reference line
XXVB - XXVB of FIG. 25A.

First, five kinds of sintered bodies were prepared
20 in the following way. A powder consisting of 90 parts
by weight of a silicon nitride powder (Si_3N_4), 5 parts
by weight of Y_2O_3 and 5 parts by weight of MgAl_2O_4 ,
each as a sintering aid, was admixed with 15 wt% of TiC
particles, 10 wt% of TiN particles, 10 wt% of WC
25 particles, 10 wt% of B_4C particles, and 15 wt% of TiB_2
particles respectively. Each blend was hot-pressed in a
nitrogen atmosphere under a pressure of 30 MPa. Then,

braking pieces, each in the form of a conical trapezoid having a diameter of 15 mm for sliding face, a diameter of 17 mm for bottom and a thickness of 4.5 mm, were prepared by machining the sintered body. As illustrated
5 in FIGS. 23A and 23B, a braking piece 91 was inserted into a through hole 93 in the form of a conical trapezoid of a stainless steel supporting block 92 in the form of a square pole. This structure was combined with a stainless steel supporting body 94 in the form
10 of a square pole in such a manner that the bottom surface of the braking piece 91 abuts against the supporting body 94. Thereafter, the braking piece 91 was threadably attached to the supporting body 94 using screws 95 at four corners of the supporting block 92 in
15 such a manner that the sliding face (braking face) projects from the surface of the supporting block 92 by a height of 500 μ m. The test member was subjected to an inertial friction test according to the following procedure.

20 Two test members each having braking piece arrange each other a disk-like member of SS400, served as a rail material in such a manner that the braking pieces of the test members faces with the both circular face of the disk like member, respectively. The two test
25 members were caused to pinch the rotating disk, and the measurements of pressing force, frictional force and number of rotations were conducted until the rotation

slowed down and stopped. The testing condition was set up on the basis of a working condition of a device for emergency stop of elevator having a speed of 1250 m/min. The operation was repeated three times, and the state
5 of the test members (braking pieces in particular) was observed at the first operation and at the third operation. The results are indicated in Table 5.

Test members of another construction were prepared in the following way. As illustrated in FIGS. 24A and
10 24B, a braking piece 91 was inserted into a through hole 93 in the form of a conical trapezoid of a stainless steel supporting block 92 in the form of a square pole via a conical cylinder body (buffering material) 96 made of a heat resistant silicon carbide
15 long fiber cloth. This structure was combined with a stainless steel supporting body 94 in the form of a square pole in such a manner that the bottom surface of the braking piece 91 abuts against the supporting body 94 via a sheet (buffering material) 97 made of a heat
20 resistant silicon carbide long fiber cloth. Thereafter, the braking piece 91 was threadably attached to the supporting body 94 using screws 95 driven through the sheet 97 at four corners of the supporting block 92 in such a manner that the sliding face (braking face)
25 projects from the surface of the supporting block 92 by a height of 500 μ m. The test member was subjected to the same inertial friction test as described in the

above. The coefficient of friction of the sliding face as well as the state of the test members (braking pieces in particular) were observed at the first operation and at the third operation. The results are also indicated in Table 5.

Further, test members comprising the same sintered body and having the same construction as in FIGS. 24A and 24B were prepared, except that the prepared test members had a braking piece 91 having grid-like grooves with a depth of 0.2 mm and a pitch of 1.0 mm on the sliding face as shown in FIGS. 25A and 25B. The test member was subjected to the same inertial friction test as described in the above. The coefficient of friction of the sliding face as well as the state of the test members (braking pieces in particular) were observed at the first operation and at the third operation. The results are also indicated in Table 5.

Comparative Example 20

A sintered body was prepared by hot-pressing a powder blend consisting of 90 parts by weight of a silicon nitride powder (Si_3N_4), 5 parts by weight of Y_2O_3 and 5 parts by weight of MgAl_2O_4 , each as a sintering aid, in a nitrogen atmosphere under a pressure of 30 MPa. Thereafter, a braking pieces having a form of a conical trapezoid and the same size as that of Example 60 was prepared by machining the sintered body. A test member having the same construction as in

FIGS. 24A and 24B was prepared by using of the braking
piece. The test member was subjected to the same
inertial friction test as described in the above. The
coefficient of friction of the sliding face as well as
5 the state of the test members (braking pieces in
particular) were observed at the first operation and at
the third operation. The results are also indicated in
Table 5. In Table 5, slight cracks means that cracks
occur only on the surface of the braking piece, while
10 significant cracks means that cracks occur from the
surface in the direction of depth.

Table 5

	Construction of Test Members				Coeffi- cient of Friction (μ)	State of Braking Piece	
	Construction of Braking Piece	Presence or Absence of Bufferings Material	Presence or Absence of Grid- Like Grooves			1st	3rd
Comparative Example 20	-	Absent	Absent	Absent	0.28	No Crack	Slight Cracks
Example 60	TiC	Absent	Absent	Absent	0.33	No Crack	Significant Cracks
Example 61		Present	Absent	Absent	0.33	No Crack	No Crack
Example 62		Present	Present	Present	0.42	No Crack	No crack
Example 63	TiN	Absent	Absent	Absent	0.32	No Crack	Significant Cracks
Example 64		Present	Absent	Absent	0.32	No Crack	No Crack
Example 65		Present	Present	Present	0.41	No Crack	No Crack
Example 66	WC	Absent	Absent	Absent	0.32	No Crack	Significant Cracks
Example 67		Present	Absent	Absent	0.33	No Crack	No Crack
Example 68		Present	Present	Present	0.41	No Crack	No Crack

(Continued)

Table 5

	Construction of Test Members				Coeffi- cient of Friction (μ)	State of Braking Piece	
	Construction of Braking Piece		Presence or Absence of Bufferings Material	Presence or Absence of Grid- Like Grooves		1st	3rd
	Com- posite Parti- cles	Amount of Composite Particles					
Example 69	B4C	10 wt%	Absent	Absent	0.34	No Crack	Significant Cracks
Example 70			Present	Absent	0.34	No Crack	No Crack
Example 71			Present	Present	0.45	No Crack	No Crack
Example 72	TiB2	15 wt%	Absent	Absent	0.39	No Crack	Significant Cracks
Example 73			Present	Absent	0.39	No Crack	No Crack
Example 74			Present	Present	0.49	No Crack	No Crack

As seen from Table 5, the braking parts of Examples 60 to 74 exhibit higher coefficients of friction than the braking part of Comparative Example 20. Their coefficients of friction are, however, lower than the coefficients of friction of the braking parts of Examples shown in Tables 1 to 4. This is because the experiments were conducted on the braking parts of Examples 60 to 74 on the assumption that the cage was falling at 1250 m/min, which is a very high speed.

Also, it can be seen that none of the braking pieces of test members of Examples 60 to 74 and of the braking piece of the test member of Comparative Example 20 cracks at the first operation of the inertial friction test.

Particularly, the braking pieces of test members, which utilize the buffering material, of Examples 61, 62, 64, 65, 67, 68, 70, 71, 73 and 74 are entirely free of cracks, thereby indicating a high level of braking action. Also, it can be seen that the braking pieces of test members, which have grid-like grooves on the sliding face, of Examples 62, 65, 68, 71 and 74 have a higher coefficient of friction.

Further, brake shoes each having braking piece as shown in FIGS. 9A and 9B through FIGS. 12A and 12B were prepared. The braking piece of each of the brake shoes was prepared from sintered bodies containing,

respectively, 15 wt% of TiC particles, 10 wt% of TiN particles, 10 wt% of WC particles, 10 wt% of B₄C particles, and 15 wt% of TiB₂ particles. The brake shoes were incorporated into the devices for elevator emergency stop shown in FIGS. 1, 2 and 8. Then, the state of emergency stop was observed by dropping the cage at a speed of 1250 m/min by cutting the rope. As a result, because of the friction between a pair of brake shoe and the rail, the cage slowed down and stopped within the fall of 30 m in the case of any one of the devices for elevator emergency stop.

Examples 75 - 84

First, powder was prepared which consisted of 90 parts by weight of silicon nitride (Si₃N₄) powder, 5 parts by weight of Y₂O₃ and 5 parts by weight of MgAl₂O₄. Five portions were made of the powder thus prepared. TiC particles, TiN particles, WC particles, B₄C particles and TiB₂ particles all having an average diameter of 50 μm, were mixed with the five portions of the power, in prescribed amounts. As a result, five mixing powders were obtained. Each mixing powder was hot-pressed in a nitrogen atmosphere under a pressure of 30 MPa. Then, five kinds of braking pieces, each in the form of a conical trapezoid having a diameter of 15 mm for sliding face, a diameter of 17 mm for bottom and a thickness of 4.5 mm, were prepared by machining the sintered body. In the braking pieces, TiC

particles, TiN particles, WC particles, B₄C particles and TiB₂ particles were dispersed in an amount of 10 to 15 wt% in the region ranging from the surface to a depth of 0.5 mm (about 11% of the total thickness), respectively. Thereafter, test members as illustrated in FIGS. 23A and 23B were prepared by using these braking pieces. The test members were subjected to the same inertial friction test as in the case of Example 60, and the coefficient of friction of the sliding face as well as the state of the test members (braking pieces in particular) were observed at the first operation and at the third operation. The results are indicated in Table 6.

Further, five kinds of braking pieces, each in the form of a conical trapezoid having a diameter of 15mm for sliding face, a diameter of 17 mm for bottom and a thickness of 4.5 mm, were prepared by machining the sintered body. In these braking pieces TiC particles, TiN particles, WC particles, B₄C particles, and TiB₂ particles were dispersed in an amount of 10 to 15 wt% in the region ranging from the surface to a depth of 0.5 mm (about 11% of the total thickness), respectively. In addition, each braking pieces had grid-like grooves with a depth of 0.2 mm and a pitch of 1.5 mm on the sliding face. Thereafter, by use of these braking pieces, test members as illustrated in FIGS. 25A and 25B were prepared. The test members were subjected to

the same inertial friction test as described in the above, and the coefficient of friction of the sliding face as well as the state of the test members (braking pieces in particular) were observed at the first
5 operation and at the third operation. The results are also indicated in Table 6.

In Table 6, slight cracks means that cracks occur only on the surface of the braking piece, while significant cracks means that cracks occur from the
10 surface in the direction of depth.

Table 6

	Construction of Test Members					Coeffi- cient of Friction (μ)	State of Braking Piece	
	Construction of Braking Piece		Presence or Absence of Bufferings Material	Presence or Absence of Grid- Like Grooves	1st		3rd	
	Com- posite Parti- cles	Amount of Composite Particles or Layer Side						
Example 75	TiC	15 wt%	Absent	Absent	0.34	No Crack	Slight Cracks	
Example 76			Present	Present	0.48	No Crack	No Crack	
Example 77	TiN	10 wt%	Absent	Absent	0.32	No Crack	Slight Cracks	
Example 78			Present	Present	0.47	No Crack	No Crack	
Example 79	WC	10 wt%	Absent	Absent	0.32	No Crack	Slight Cracks	
Example 80			Present	Present	0.45	No Crack	No Crack	
Example 81	B ₄ C	10 wt%	Absent	Absent	0.35	No Crack	Slight Cracks	
Example 82			Present	Present	0.54	No Crack	No Crack	
Example 83	TiB ₂	15 wt%	Absent	Absent	0.40	No Crack	Slight Cracks	
Example 84			Present	Present	0.58	No Crack	No Crack	

From Table 6, it can be seen that the braking pieces of the test members of Example 75, 77, 79, 81 and 83 exhibit a high coefficient of friction equivalent to that of the braking pieces of the test members of Example 60, 63, 66, 69 and 72 which use the same composite particles (ceramic particles), dispersed throughout the entire thickness, respectively. Besides, whereas the braking pieces of the test pieces of Example 60, 63, 66, 69 and 72 which develop cracks in the braking piece using no buffering material in the depth direction at the third operation of the inertial friction test, the braking pieces of the test pieces of Example 75, 77, 79, 81 and 83 exhibit cracks only on the surface at the third operation of the inertial friction test. This is, because composite particles such as TiC particles are dispersed only in the surface layer that needs to impart a high coefficient of friction in the braking pieces of the test members of Example 75, 77, 79, 81 and 83, while the region of the braking piece, which comprises Si_3N_4 and contains none of the dispersed composite particles, has the impact resistance enhanced.

Also, it can be seen from the Table 6 that none of the braking pieces of test members of Examples 76, 78, 80, 82 and 84 develops any crack even at the third operation of the inertial friction test and that the braking pieces themselves have a high coefficient of

friction and have a high braking function.

Further, brake shoes as illustrated in FIGS. 9A and 9B through FIGS. 12A and 12B were prepared by using braking pieces. In the braking pieces, TiC particles, TiN particles, WC particles, B₄C particles, and TiB₂ particles were dispersed in an amount of 10 to 15 wt% in the region ranging from the surface to a depth of 0.5 mm of the braking piece, respectively. In addition, the aforementioned grid-like grooves were formed on the sliding face of each of the braking pieces. The brake shoes were incorporated into the devices for elevator emergency stop shown in FIGS. 1, 2 and 8. Then, the state of emergency stop was observed by dropping the cage at a speed of 1250 m/min by cutting the rope. As a result, because of the friction between a pair of brake shoe and the rail, the cage slowed down and stopped within the fall of 30 m in the case of any one of the devices for elevator emergency stop.

Examples 85 - 94

First, powder was prepared which consisted of 90 parts by weight of silicon nitride (Si₃N₄) powder, 5 parts by weight of Y₂O₃ and 5 parts by weight of MgAl₂O₄. Five portions were made of the powder thus prepared. TiC particles, TiN particles, WC particles, B₄C particles and TiB₂ particles, all having an average diameter of 50 μm, were mixed with the five portions of the powder, in prescribed amounts. As a result, five

mixing powders were obtained. Each mixing powder was hot-pressed in a nitrogen atmosphere under a pressure of 30 MPa. Then, ten kinds of braking pieces, each in the form of a conical trapezoid having a diameter of 15 mm for sliding face, a diameter of 17 mm for bottom and a thickness of 4.5 mm, were prepared by machining the sintered body. In the braking pieces, wherein TiC particles, TiN particles, WC particles, B₄C particles, and TiB₂ particles, were dispersed in an amount of 10 to 15 wt% in the region ranging from the surface to a depth of 0.225 mm (5% of the total thickness) and to a depth of 1.26 mm (28% of the total thickness), respectively. In addition grid-like grooves with a depth of 0.2 mm and a pitch of 1.5 mm were formed on the sliding face of each of the braking pieces. Thereafter, by use of these braking pieces, test members as illustrated in FIGS. 25A and 25B were prepared. The test members were subjected to the same inertial friction test as described in the above, and the coefficient of friction of the sliding face as well as the state of the test members (braking pieces in particular) were observed at the first operation and at the third operation. The results are also indicated in Table 7. Table 7 includes the results of Examples 76, 78, 80, 82 and 84, too.

In Table 7, slight cracks means that cracks occur only on the surface of the braking piece.

Table 7

	Construction of Test Members				Coeffi- cient of Friction (μ)	State of Braking Piece	
	Construction of Braking Piece		Presence or Absence of Bufferings Material	Presence or Absence of Grid- Like Grooves		1st	3rd
	Com- posite Parti- cles	Thickness of Surface Layer*					
Example 85	TiC	5%	Present	Present	0.48	No Crack	No Crack
Example 76		about 11%	Present	Present	0.48	No Crack	No Crack
Example 86		28%	Present	Present	0.45	No Crack	Slight Cracks
Example 87	TiN	5%	Present	Present	0.47	No Crack	No Crack
Example 78		about 11%	Present	Present	0.47	No Crack	No Crack
Example 88		28%	Present	Present	0.43	No Crack	Slight Cracks
Example 89	WC	5%	Present	Present	0.47	No Crack	No Crack
Example 80		about 11%	Present	Present	0.45	No Crack	No Crack
Example 90		28%	Present	Present	0.42	No Crack	Slight Cracks
Example 91	B ₄ C	5%	Present	Present	0.54	No Crack	No Crack
Example 82		about 11%	Present	Present	0.54	No Crack	No Crack
Example 92		28%	Present	Present	0.53	No Crack	No crack
Example 93	TiB ₄	5%	Present	Present	0.59	No Crack	No Crack
Example 84		about 11%	Present	Present	0.58	No Crack	No Crack
Example 94		28%	Present	Present	0.57	No Crack	No crack

*; The thickness (%) of Surface Layer Indicates a Proportion of the Thickness

From Table 7, it can be seen that the crack formation is limited to the surface at the third operation of the inertial friction test for the test members of Examples 86, 88, 90, 92 and 94 where use is made of a buffering material and of a braking piece in which composite particles such as TiC particles, were dispersed only in the surface layer having a thickness of 28 % of the total thickness.

Also, in the case of the test members of Examples 76, 85, 78, 87, 80, 89, 82, 91, 84 and 93 used a buffering material and braking piece which has grid-like grooves in the sliding face and in which composite particles such as TiC particles, TiN particles, WC particles, B₄C particles and TiB₂ particles were dispersed only in the surface layer having a thickness of about 11% or 5% of the total thickness, each the braking piece is entirely free of cracks even after the third operation of the inertial friction test. In addition each the braking piece itself has a high coefficient of friction and a high braking function.

Further, brake shoes as illustrated in FIGS. 9A and 9B through FIGS. 12A and 12B were prepared by use of braking pieces. In the braking pieces, TiC particles, TiN particles, WC particles, B₄C particles, and TiB₂ particles were dispersed in an amount of 10 to 15 wt% in the region ranging from the surface to a depth of 0.225 mm (about 5 % of the total thickness) of the

braking pieces, respectively. In addition, each braking pieces had grid-like grooves on the sliding face. The brake shoes were incorporated into the devices for elevator emergency stop shown in FIGS. 1, 2 and 8. Then, the state of emergency stop was observed by dropping the cage at a speed of 1250 m/min by cutting the rope. As a result, because of the friction between a pair of brake shoe and the rail, the cage slowed down and stopped within the fall of 30 m in the case of any one of the devices for elevator emergency stop.

Example 95

A silicon nitride powder contained 5 wt% of Y_2O_3 and 5 wt% of $MgAl_2O_4$, each as a sintering aid, was hot-pressed for one hour in a nitrogen atmosphere under a condition of 1700°C and 300 kg/cm² to produce a plate-like sintered body. Subsequently, the sintered body was NC machined into braking pieces of the constructions as illustrated in FIG. 13A and 13B having pyramid-shaped projections regularly arranged.

Example 96

A silicon nitride powder, contained 5 wt% of Y_2O_3 and 5 wt% of $MgAl_2O_4$, each as a sintering aid, was hot-pressed for one hour in a nitrogen atmosphere under a condition of 1700°C and 300 kg/cm² to produce a plate-like sintered body. Subsequently, the sintered body was NC machined into braking pieces of the constructions as illustrated in FIGS. 14A and 14B

having parallel semi-cylindrical projections regularly arranged.

An inertial friction test was conducted by bringing braking pieces of Examples 95 and 96 into a sliding contact with a rail. That is, a pin-shaped test piece (TP₁) for braking piece was formed so that the projections were present at the tip face, while SS400 as a material for rail was formed into a disk-shaped test piece (TP₂). The test was conducted in such a manner that the tip of the test piece TP₁ was pressed against the circular face of a rotating test piece TP₂ and the measurements of pressing force, frictional force and number of rotations were conducted until the rotation slowed down and stopped and the relative wear amount after test of the pin-shaped test piece was investigated. The results are shown in FIGS. 26 and 27. The FIGS. 26 and 27 show the results of Comparative Example 19, too.

From FIG. 26, it can be seen that, relative to the material for brake of Comparative Example 19, the braking pieces of Example 95 and 96 exhibit a higher coefficient of friction from the point immediately after the start of friction and the coefficient becomes further stabilized in the period of from the start of the test to the stop. Also, from FIG. 27, it can be seen that, relative to the material for brake of Comparative Example 19, the braking pieces of

Examples 95 and 96 exhibit better property with respect to the relative wear amount.

Further, brake shoes, as illustrated in FIGS. 9A and 9B through FIGS. 12A and 12B, were prepared by use of braking pieces of Examples 95 and 96. The brake shoes were incorporated into the devices for elevator emergency stop shown in FIGS. 1, 2 and 8. Then, the state of emergency stop was observed by dropping the cage at a speed of 1250 m/min by cutting the rope. As a result, because of the friction between a pair of brake shoe and the rail, the cage slowed down and stopped within the fall of 30 m in the case of any one of the devices for elevator emergency stop.

Examples 97 - 100

Pairs of brake shoes were prepared by arranging braking pieces made of composite materials of Examples 3, 11, 19 and 27 on the braking face side of a brake body made of ductile cast iron. The pairs of brake shoes were incorporated into the devices for elevator emergency stop 71 shown in FIG. 16. Then, the state of emergency stop was observed by dropping the cage at a speed of 1250 m/min by cutting the rope. As a result, because of the friction between a pair of brake shoes and the rail, the cage slowed down and stopped within the fall of 30 m in the case of any one of the devices for elevator emergency stop. After the emergency stop, the brake shoes were taken out of the

device for emergency stop, and the braking pieces were observed. According to the result of the observation, each of the braking pieces had a trace indicating that entire surface of the braking piece including upper
5 portion and lower portion contacted the projected portion of the rail.

Examples 101 - 105

Pairs of brake shoes as illustrated in FIGS. 9A and 9B, were prepared by use of braking pieces of
10 Examples 62, 65, 68, 71 and 74. The pairs of brake shoes were incorporated into the devices for elevator emergency stop 81 as shown in FIG. 19. Then, the state of emergency stop was examined by dropping the cage at a speed of 1250 m/min by cutting the rope. As a result,
15 because of the friction between a pair of brake shoes and the rail, the cage slowed down and stopped within the fall of 30 m in the case of any one of the devices for elevator emergency stop. After the emergency stop, the brake shoes were taken out of the device for
20 emergency stop, and the braking pieces were observed. According to the result of the observation, each of the braking pieces had a trace indicating that all of the plural projections of braking pieces contacted the projected portion of the rail.

25 As explained in the above, according to the present invention there is provided a brake shoe for elevator emergency stop which has a heat resistance

to a temperature that exceeds 1000°C as well as a stabilized high coefficient of friction and an excellent seizure-resistance to rails even under the condition of high speed and high stress.

5 Further, according to the present invention there is provided a brake shoe for elevator emergency stop which has a heat resistance to a temperature that exceeds 1000°C as well as a stabilized high coefficient of friction, an excellent impact resistance and a
10 stabilized braking property even under the condition of high speed and high stress.

 Further, according to the present invention there is provided a device for elevator emergency stop where the cage can be securely slowed down and stopped
15 without causing seizure on the rail, at the time when the cage of the elevator is caused to fall due to the breakdown of the elevating means of the elevator.

 Further, according to the present invention there is provided a device for elevator emergency stop where
20 a stabilized braking property can be exhibited without causing seizure on the rail and the cage can be securely slowed down and stopped at the time when the cage of the elevator is caused to fall due to the breakdown of the elevating means of the elevator.

25 Still further, according to the present invention there is provided an elevator with an emergency stop function where the cage can be securely slowed down and

stopped without causing seizure on the rail at the time when the cage of the elevator is caused to fall due to the breakdown of the elevating means of the elevator.

Additional advantages and modifications will
5 readily occur to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details and representative embodiments shown and described herein. Accordingly, various
modifications may be made without departing from the
10 spirit or scope of the general inventive concept as defined by the appended claims and their equivalent.



THIS SHEET HAS BEEN
REPLACED

- 93 -

CLAIMS

1. A brake shoe for elevator emergency stop, comprising a brake body having a braking face and a braking piece arranged said braking face side,

5 wherein said braking piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and no less than 10 wt% of at least one ceramic material selected from
10 the group consisting of a silicon carbide whisker and a silicon carbide platelet.

2. The brake shoe according to claim 1, wherein said braking piece further contains 10 to 55 volume percent of at least one continuous fiber selected from
15 the group consisting of silicon carbide, silicon nitride, carbon and tungsten.

3. A device for elevator emergency stop comprising:

20 an elastic member having a U shape, capable of opening in a horizontal direction;

 a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces inclining such that a gap between said guide members
25 gradually decreases toward the upper ends of said guide members;

 a rail having a T-shaped cross section, positioned

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



- 94 -

between said guide members and extending in a vertical direction;

5 a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

10 a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake shoes along said guide members, in the case of emergency, to cause said elastic members to press said guide members so that said brake shoes pinch said rail,

15 wherein said brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged the braking face side, and said braking piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and no less than 10 wt% of at least one ceramic
20 material selected from the group consisting of a silicon carbide whisker and a silicon carbide platelet.

4. An elevator with an emergency stop function comprising:

25 a cage;
an elevating means for elevating the cage;
an elastic member having a U shape, capable of opening in a horizontal direction and is attached to



the bottom part of said cage by a supporting means;

a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces

5 inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical
10 direction;

a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking
15 faces opposing each other; and

a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake shoes along said guide members, at the time when said cage falls due to the breakdown of said elevating means,
20 to cause said elastic member to press said guide members so that said brake shoes pinch said rail;

wherein said brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged the braking face side, and said braking piece is made
25 of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide,



- 96 -

and no less than 10 wt% of at least one ceramic material selected from the group consisting of a silicon carbide whisker and a silicon carbide platelet.

5. A brake shoe for elevator emergency stop
5 comprising a brake body having a braking face and a braking piece arranged the braking face side,

wherein said braking piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium
10 boride, sialon and silicon carbide, and a plurality of ceramic fibers dispersed and embedded in the base material to be present in a vertical state at the braking face.

6. The brake shoe according to claim 5, wherein
15 the ceramic fibers are in the form of bundles comprising a plurality of fibers.

7. A device for elevator emergency stop comprising:

an elastic member having a U shape, capable of
20 opening in a horizontal direction;

a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces inclining such that a gap between said guide members
25 gradually decreases toward the upper ends of said guide members;

a rail having a T-shaped cross section, positioned



between said guide members and extending in a vertical direction;

5 a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

10 a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake shoes along said guide members, in the case of emergency, to cause said elastic members to press said guide members so that said brake shoes pinch said rail;

15 wherein said brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged the braking face side, and said braking piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and a plurality of ceramic fibers dispersed and
20 embedded in the base material to be present in a vertical state at the braking face.

8. An elevator with an emergency stop function comprising:

25 a cage;
an elevating means for elevating the cage;
an elastic member having a U shape, capable of opening in a horizontal direction and attached to the



This Sheet Has Been Replaced



- 98 -

bottom part of said cage by a supporting means;

a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces
5 inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical
10 direction;

a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking
15 faces opposing each other; and

a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake shoes along said guide members, at the time when said cage falls due to the breakdown of said elevating means,
20 to cause said elastic member to press said guide members so that said brake shoes pinch said rail;

wherein said brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged the braking face side, and said braking piece is made
25 of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide,



This Sheet Has Been Replaced



- 99 -

and a plurality of ceramic fibers dispersed and embedded in the base material to be present in a vertical state at the braking face.

5 9. A brake shoe for elevator emergency stop comprising (a) a brake body having a braking face; and
 (b) a plurality of braking pieces embedded in the braking face side of the brake body to be projected from the braking face to form projections of a column or a multi-cornered pole having rounded corners, and
10 made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, silicon carbide and sialon, and particles at least one ceramic material selected from the group consisting of a carbide, a nitride and a boride, having
15 particle sizes in the range of 10 to 150 μ m and dispersed into the ceramic base material.

20 10. The brake shoe according to claim 9, wherein said ceramic particles are dispersed in a surface layer of said braking piece, which has a depth of 30% or less of the total thickness from the surface.

 11. The brake shoe according to claim 9, wherein the surface of said projections has a grid-shaped grooves having a depth of 0.1 to 0.5 mm and having a pitch of 0.5 to 5 mm.

25 12. The brake shoe according to claim 9, wherein the surface of said projections has a plurality of projections.



13. The brake shoe according to claim 9, wherein a sheet-shaped cushioning material is further positioned at least between said brake body and a plurality of said braking pieces.

5 14. The brake shoe according to claim 9, wherein the space between said brake body and a plurality of said braking pieces is further filled with a liquid.

10 15. The brake shoe according to claim 9, wherein a metal supporting member is further embedded in the braking face side of said brake body in order to support a plurality of the braking pieces.

15 16. The brake shoe according to claim 15, wherein said metal supporting member has a plurality of through holes each in the form of a conical trapezoid or a multi-cornered conical trapezoid having rounded corners, and said braking pieces have in the form of a conical trapezoid or in the form of a multi-cornered conical trapezoid having rounded corners so that said braking pieces are each inserted into said through hole from
20 the back thereof and said metal supporting member is embedded in the braking face side of said brake body.

17. A device for elevator emergency stop comprising:

25 an elastic member having a U shape, capable of opening in a horizontal direction;

 a pair of guide members opposing each other and having outer surfaces contacting the ends of said



This Sheet Has Been Replaced

- 101 -



elastic member, respectively, and inner surfaces inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

5 a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical direction;

a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect
10 to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and


a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake
15 shoes along said guide members, in the case of emergency, to cause said elastic member to press said guide members so that said brake shoes pinch said rail;

wherein said brake shoe comprises (a) a brake body having a braking face and (b) a plurality of braking
20 pieces embedded in the braking face side of the brake body to be projected from the braking face to form projections of a column or a multi-cornered pole having rounded corners, and

wherein said braking pieces are made of a
25 composite material containing a ceramic base material selected from the group consisting of silicon nitride, silicon carbide and sialon, and particles of at least



This Sheet Has Been Replaced



- 102 -

one ceramic material selected from the group consisting of a carbide, a nitride and a boride, each having particle sizes in the range of 10 to 150 μm and dispersed into the ceramic base material.

5 18. An elevator with an emergency stop function comprising:

 a cage;

 an elevating means for elevating the cage;

 an elastic member having a U shape, capable of
10 opening in a horizontal direction and attached to the bottom part of said cage by a supporting means;

 a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces
15 inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

 a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical
20 direction;

 a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking
25 faces opposing each other; and

 a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake



This Sheet Has Been Replaced



- 103 -

shoes along said guide members, at the time when said cage falls due to the breakdown of said elevating means, to cause said elastic members to press said guide members so that said brake shoes pinch said rail;

5 wherein said brake shoe comprises (a) a brake body having a braking face and (b) a plurality of braking pieces embedded in the braking face side of the brake body to be projected from the braking face to form projections of a column or a multi-cornered pole having
10 rounded corners, and

 wherein said braking pieces are made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, silicon carbide and sialon, and particles of at least
15 one ceramic material selected from the group consisting of a carbide, a nitride and a boride, each having particle sizes in the range of 10 to 150 μ m and dispersed into the ceramic base material.

19. A device for elevator emergency stop
20 comprising:

 an elastic member having a U shape, capable of opening in a horizontal direction;

 a pair of guide members opposing each other and having outer surfaces contacting the ends of said
25 elastic member, respectively, and inner surfaces inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide



members;

a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical direction;

5 . a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

10 a pair of pulling means is attached to said brake shoes, respectively, for pulling upward said brake shoes along said guide members, in the case of emergency, to cause said elastic member to press said guide members so that said brake shoes pinch said rail;

15 wherein said elastic has an elastic force for pressing said guide members, which becomes larger as the upper portion of each of said guide members.

20 20. The device according to claim 19, plural elastic members are arranged the outer surfaces of said guide members.

21. An elevator with an emergency stop function comprising:

a cage;

an elevating means for elevating the cage;

25 an elastic member having a U shape, capable of opening in a horizontal direction and attached to the bottom part of said cage by a supporting means;



a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical direction;

10 a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

15 a pair of pulling means attached to said brake shoes, respectively for pulling upward said brake shoes along said guide members, at the time when said cage falls due to the breakdown of said elevating means, to cause the elastic members to press said guide members so that said brake shoes pinch said rail;

20 wherein said elastic member has an elastic force for pressing said guide members, which becomes larger as the upper portion of each of said guide members.

BRAKE SHOE FOR ELEVATOR EMERGENCY STOP, DEVICE FOR
ELEVATOR EMERGENCY STOP AND ELEVATOR WITH EMERGENCY
STOP FUNCTION

ABSTRACT OF THE DISCLOSURE

The brake shoe for elevator emergency stop has a heat resistance to a temperature that exceeds 1000°C as well as a stabilized high coefficient of friction and an excellent seizure-resistance to rails even under the condition of high speed and high stress. This brake shoe for elevator emergency stop comprises a brake body having a braking face and (b) plurality of braking pieces embodied in the braking face side of the brake body to be projected from the braking face. The projection of each of the braking pieces forms a column or a multi-cornered pole having rounded corners. The braking pieces are made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, silicon carbide and sialon, and particles of at least one ceramic material selected from the group consisting of a carbide, a nitride and a boride. The ceramic particles have a particle size in the range of 10 to 150 μm , and dispersed into the ceramic base material.

Fig. 1

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced




FIG. 2

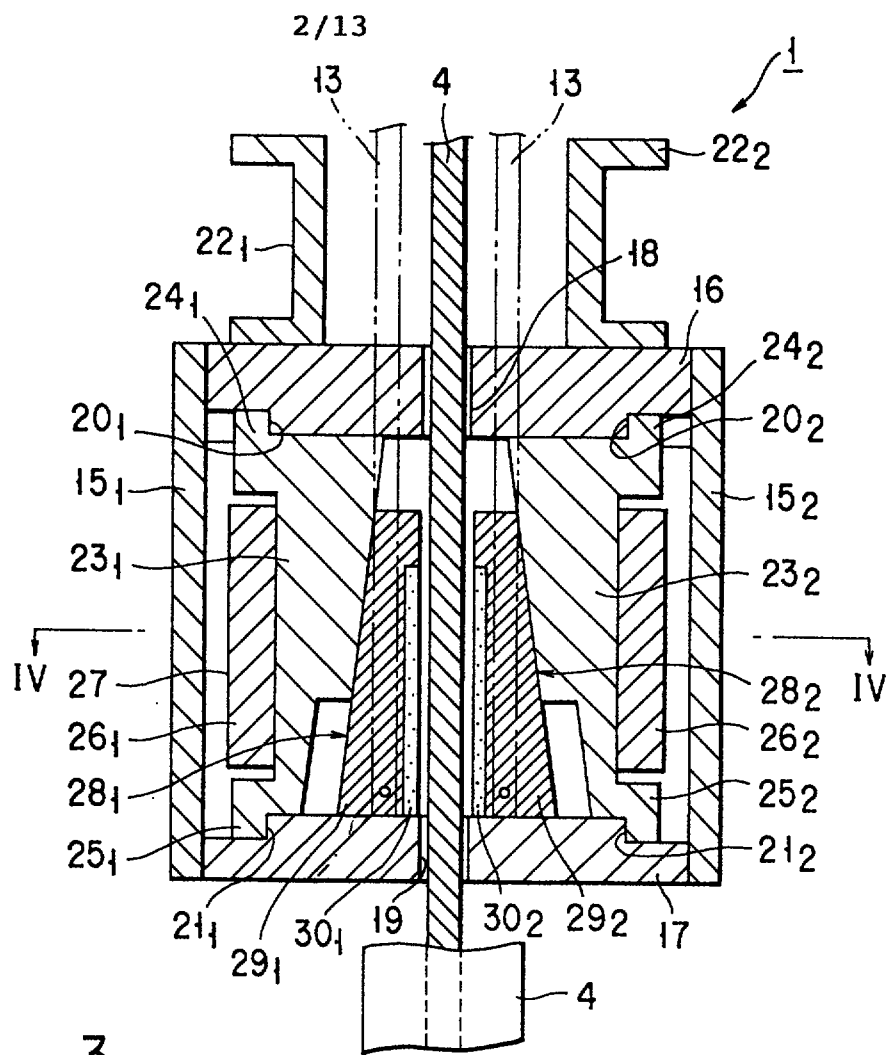


FIG. 3

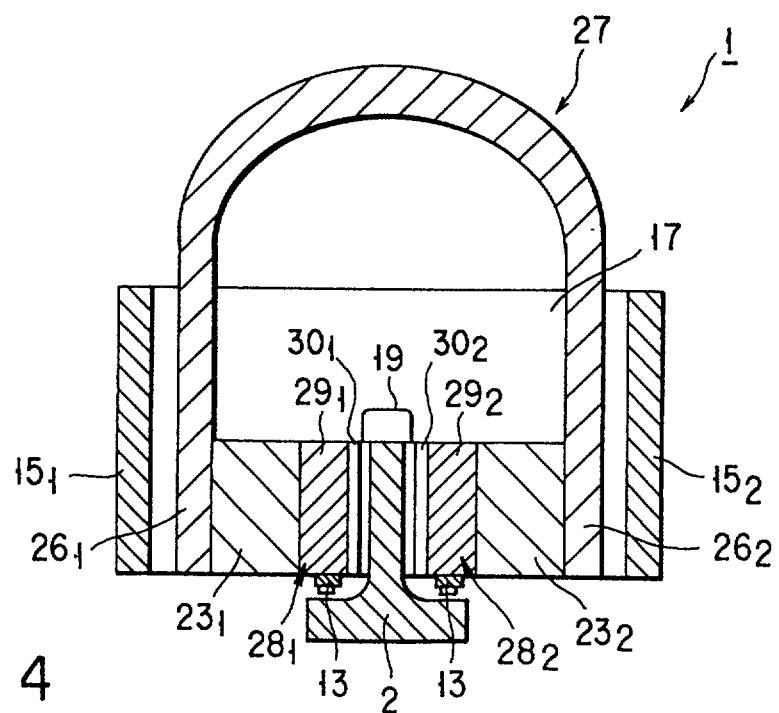


FIG. 4

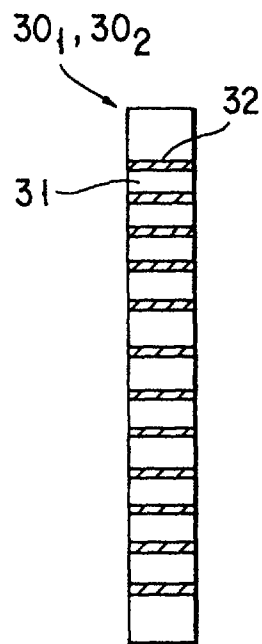


FIG. 5A

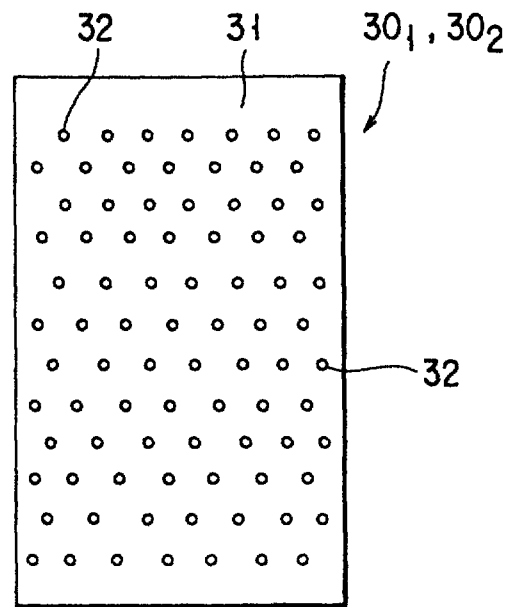


FIG. 5B

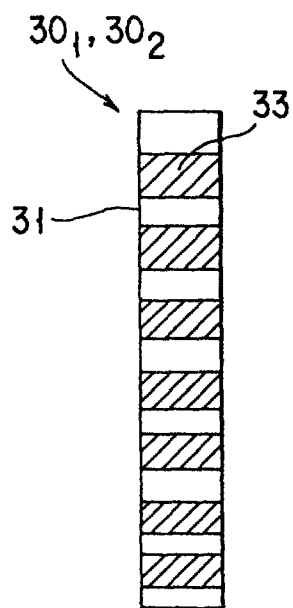


FIG. 6A

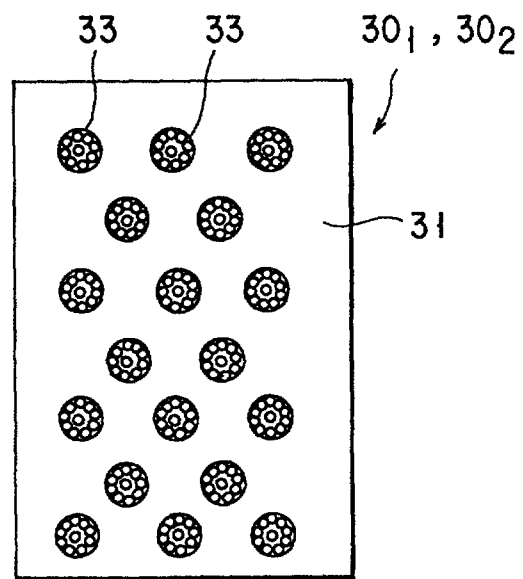
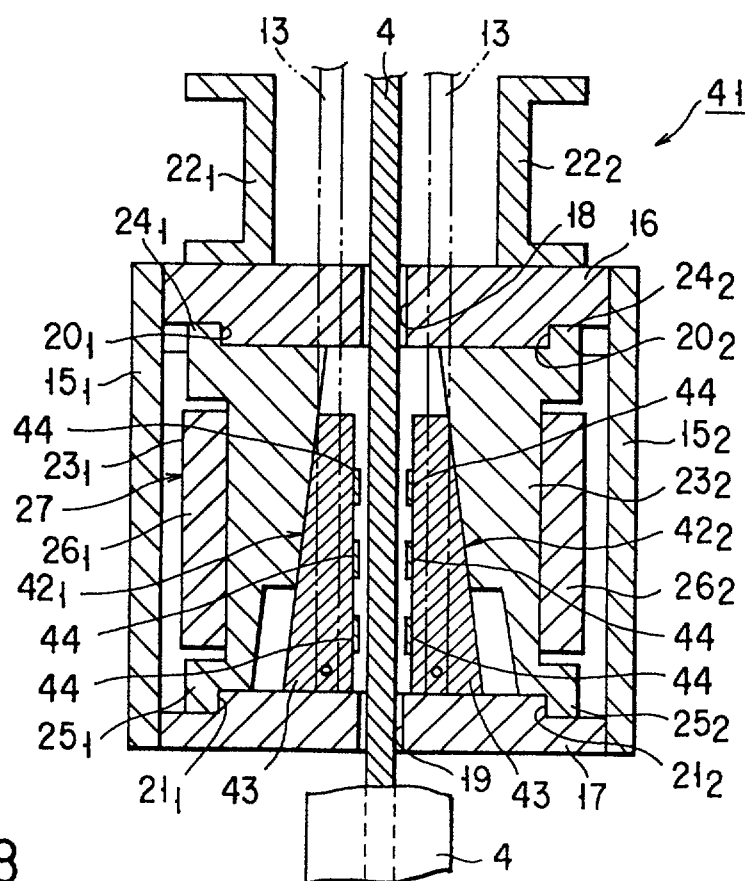
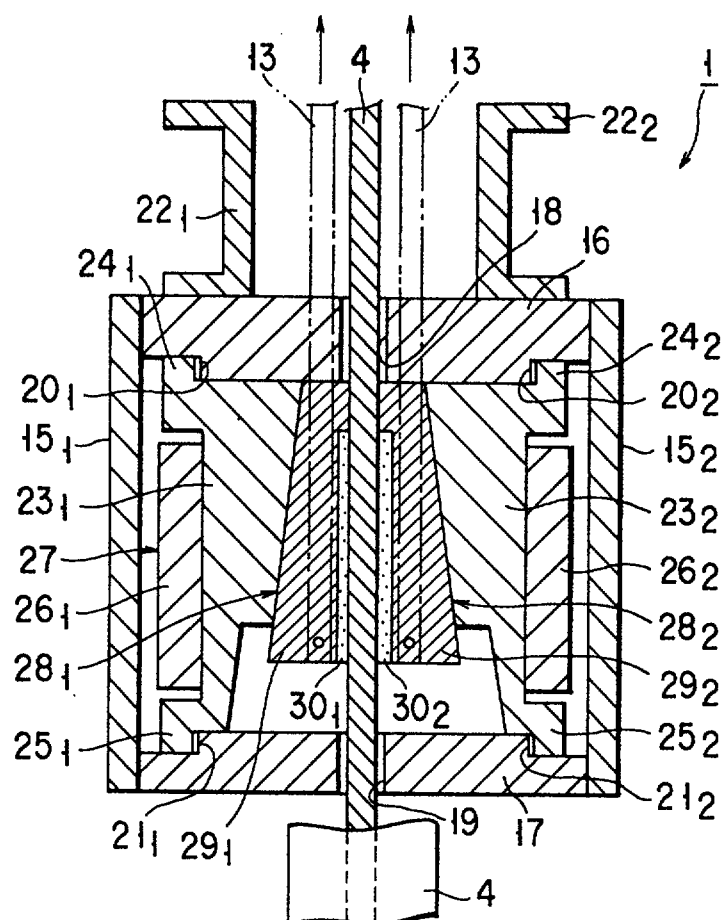


FIG. 6B



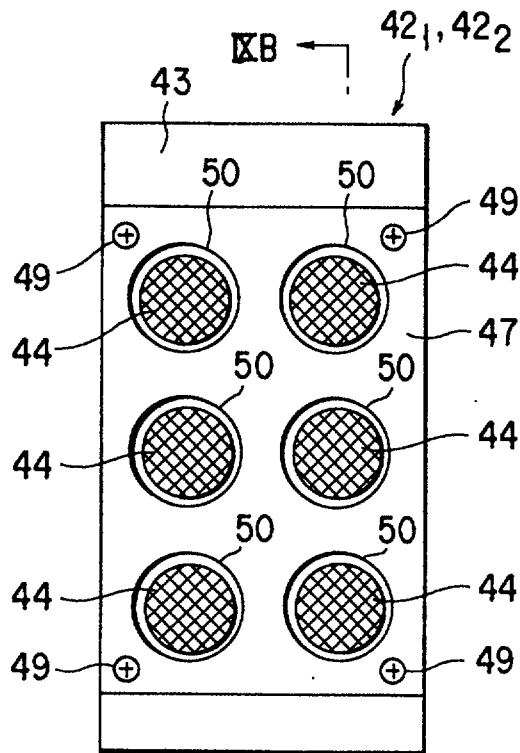


FIG. 9A

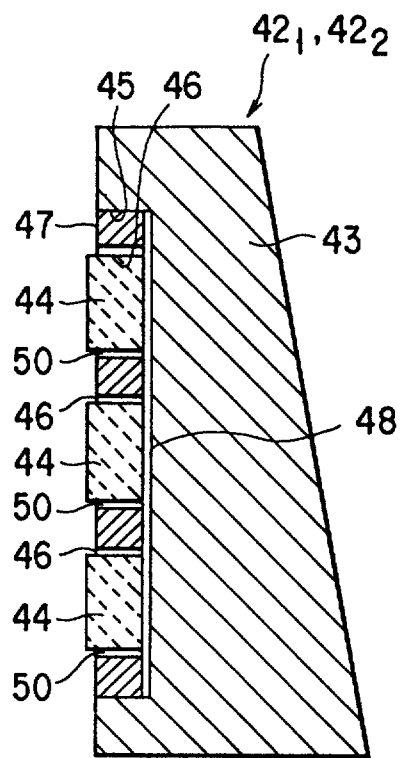


FIG. 9B

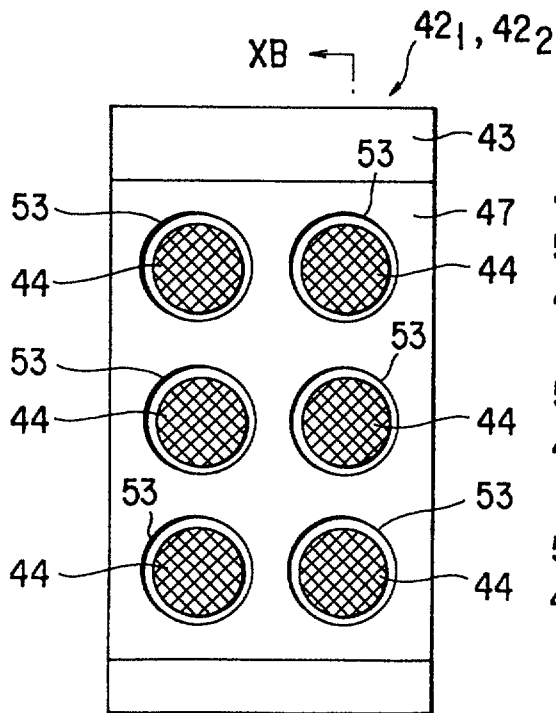


FIG. 10A

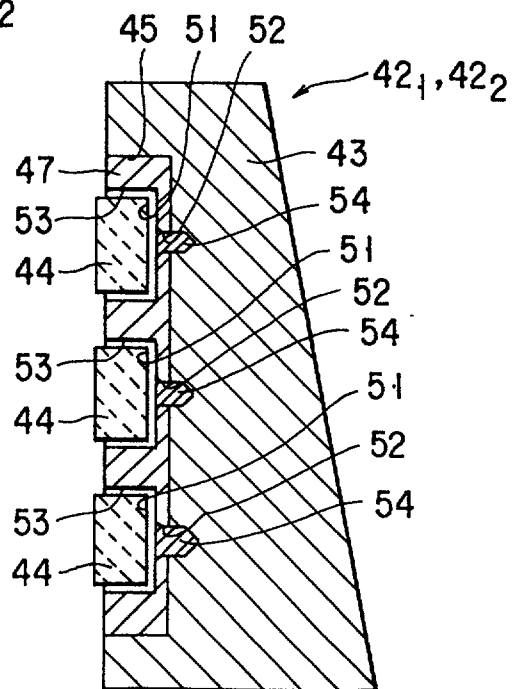


FIG. 10B

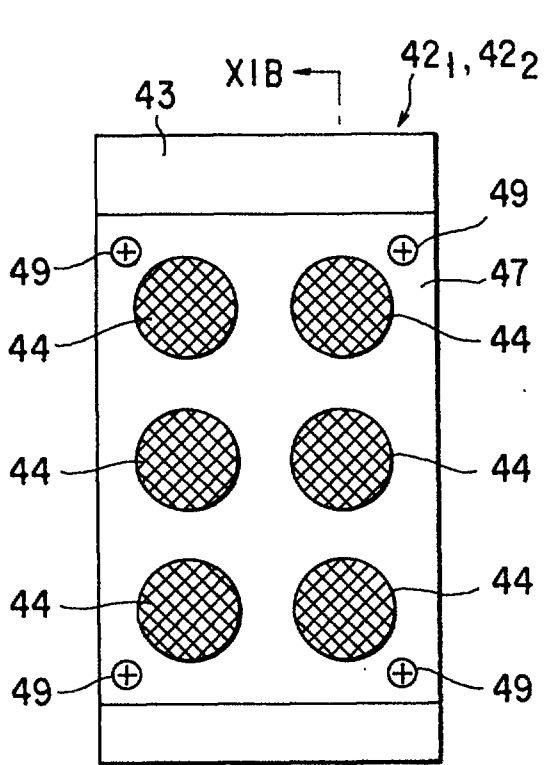


FIG. 11A

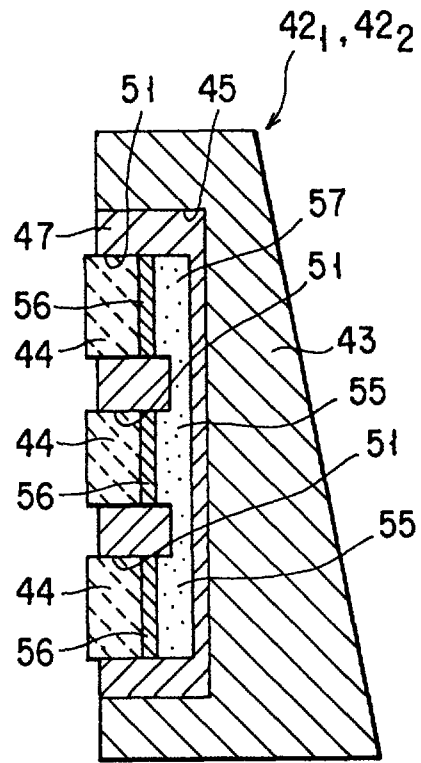


FIG. 11B

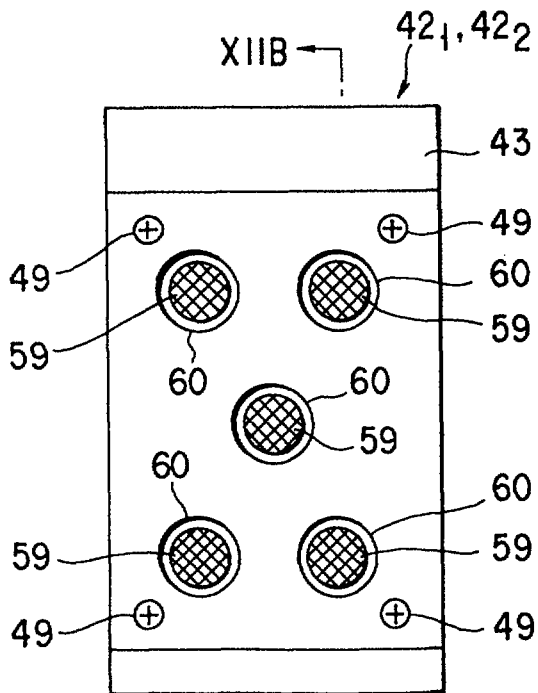


FIG. 12A

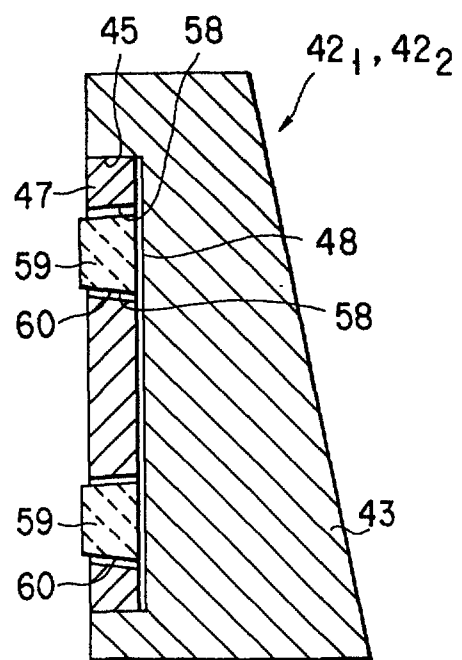


FIG. 12B

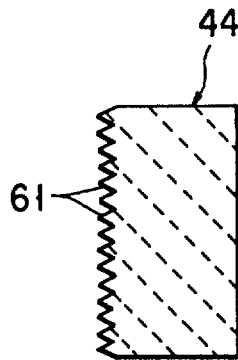


FIG. 13A

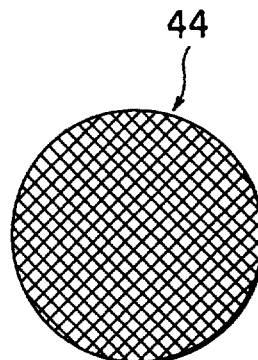


FIG. 13B




FIG. 14A




FIG. 14B

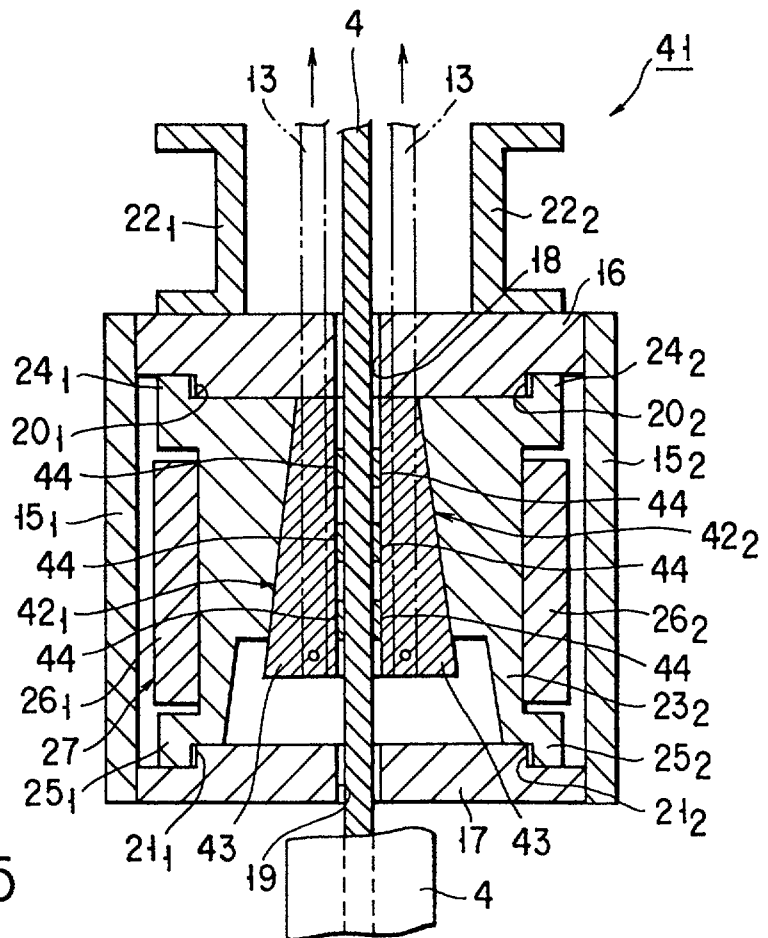


FIG. 15

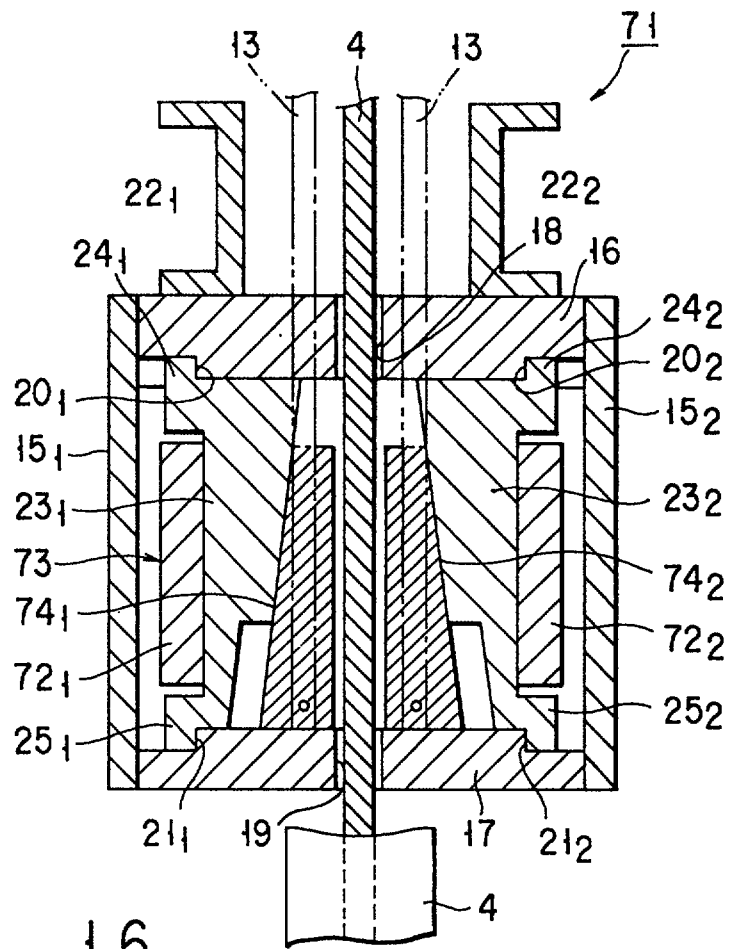


FIG. 16

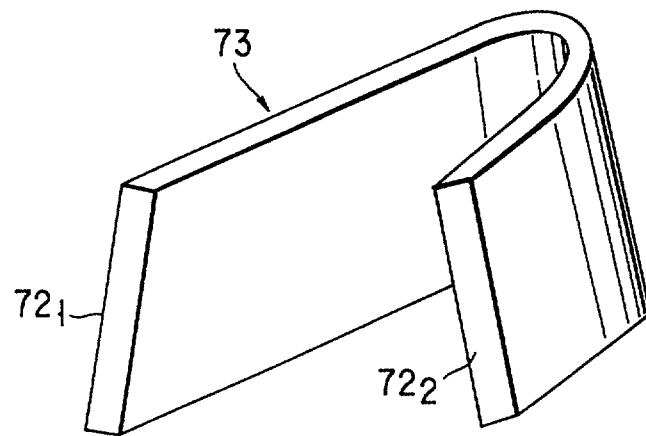


FIG. 17

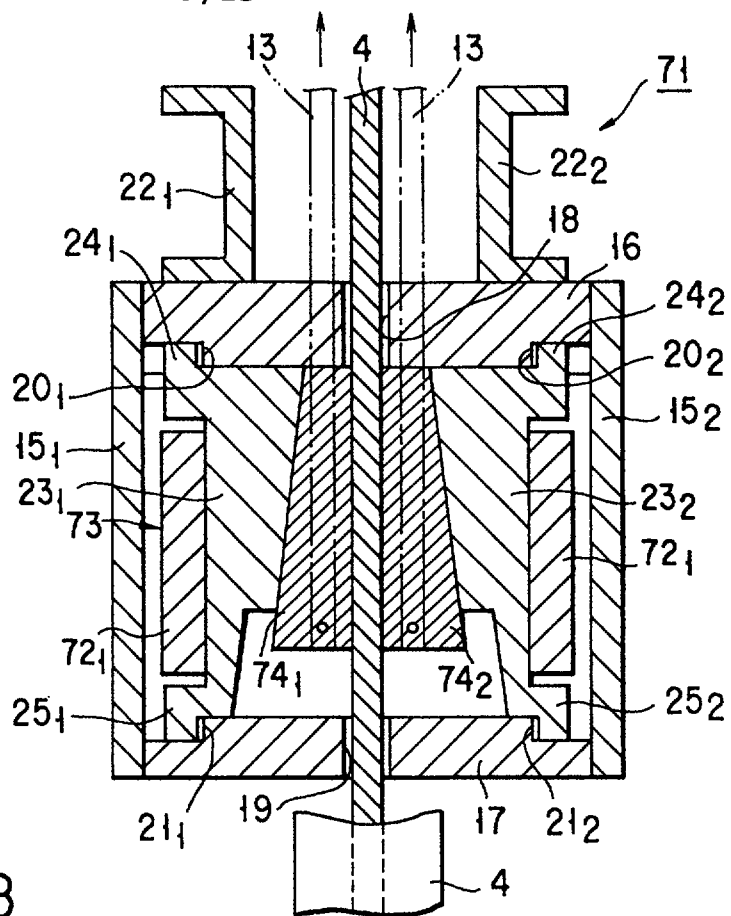


FIG. 18

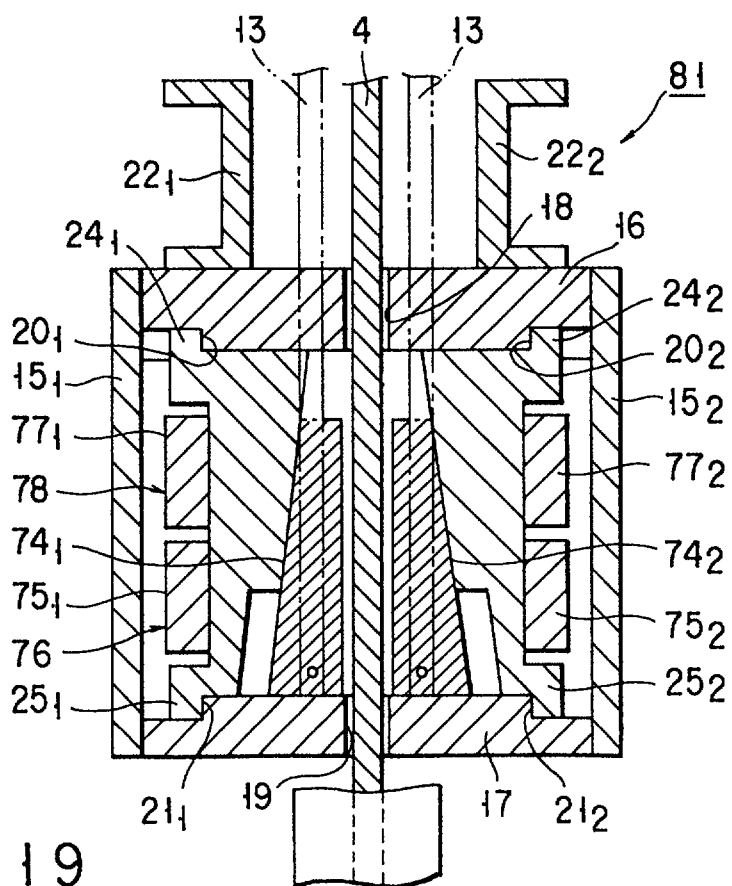


FIG. 19

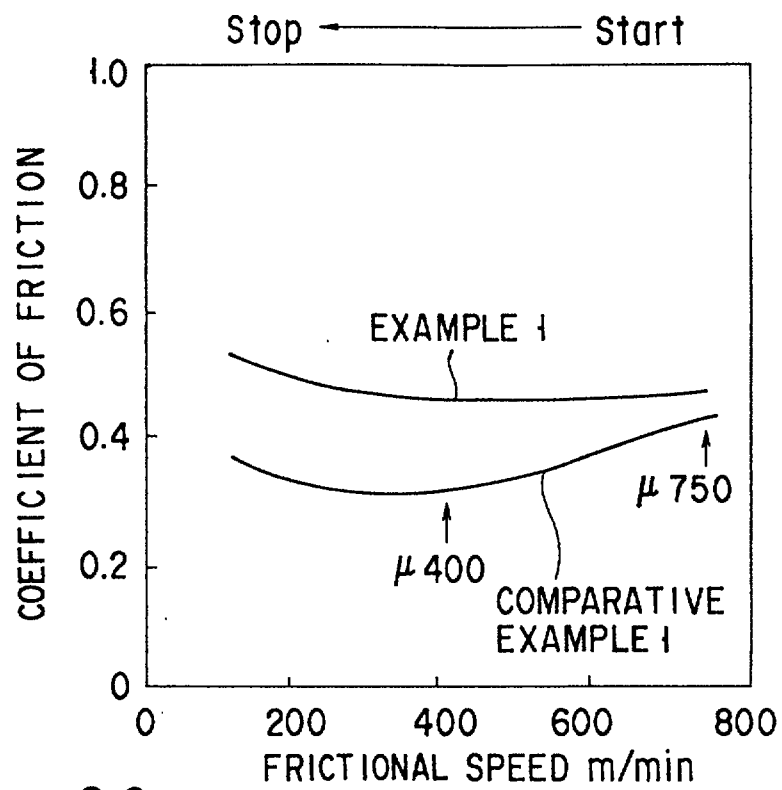


FIG. 20



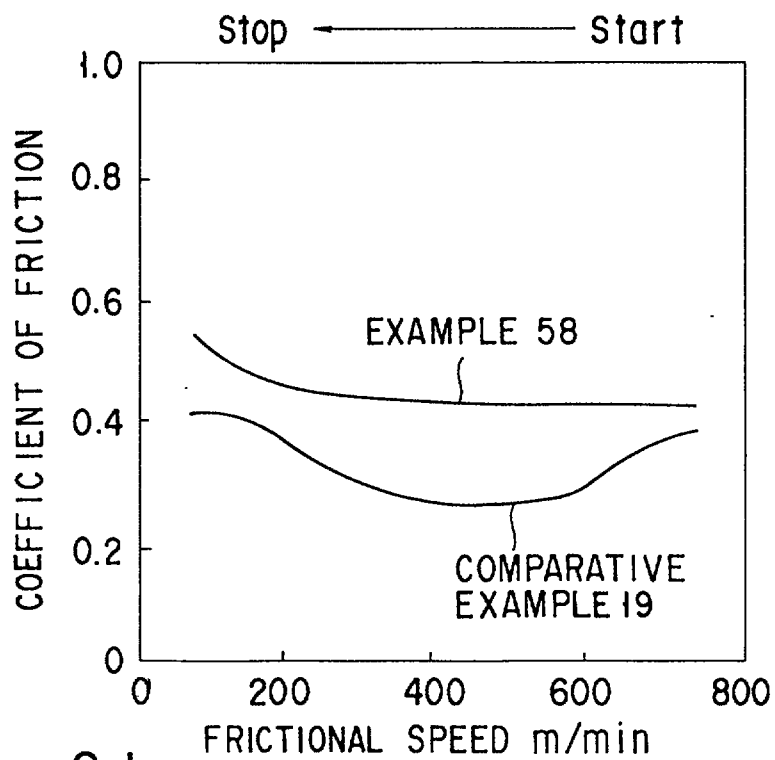



FIG. 21

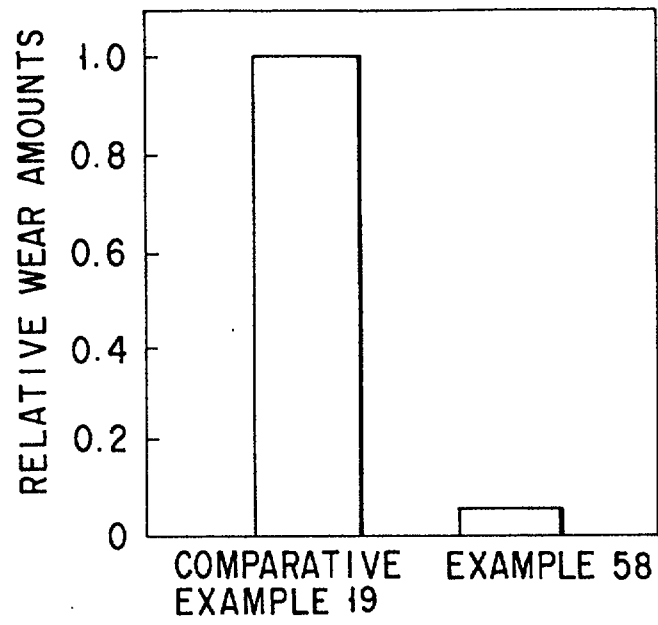

F I G. 22

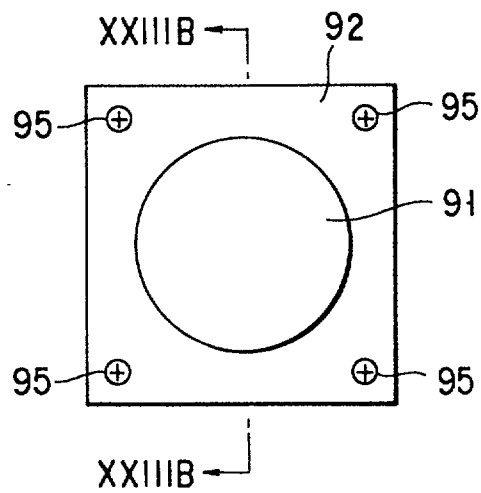

F I G. 23A

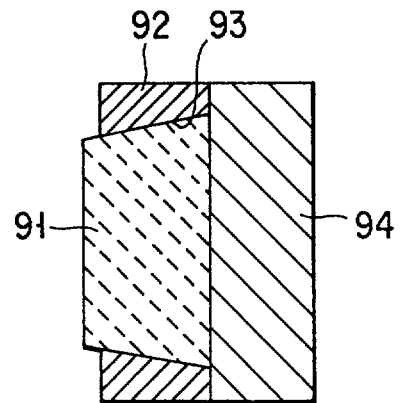

F I G. 23B

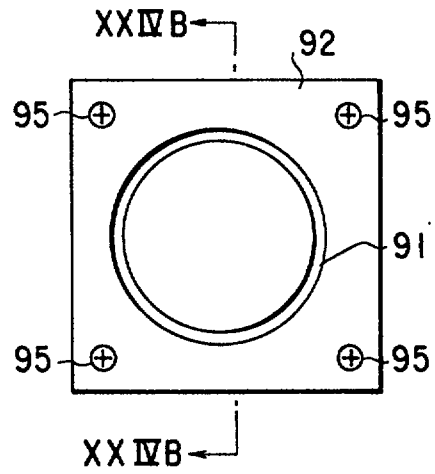


FIG. 24A

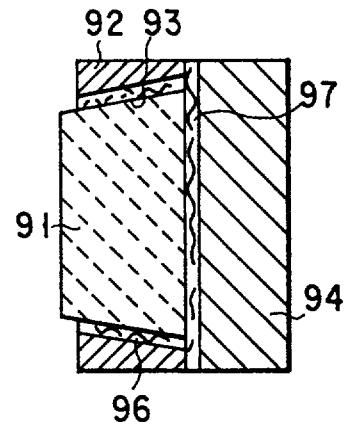


FIG. 24B

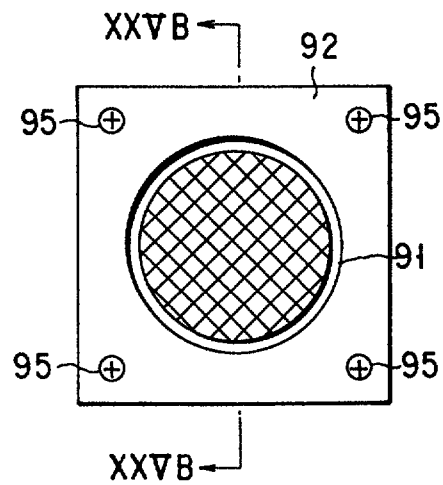


FIG. 25A

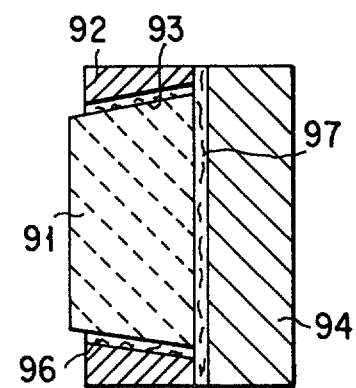


FIG. 25B

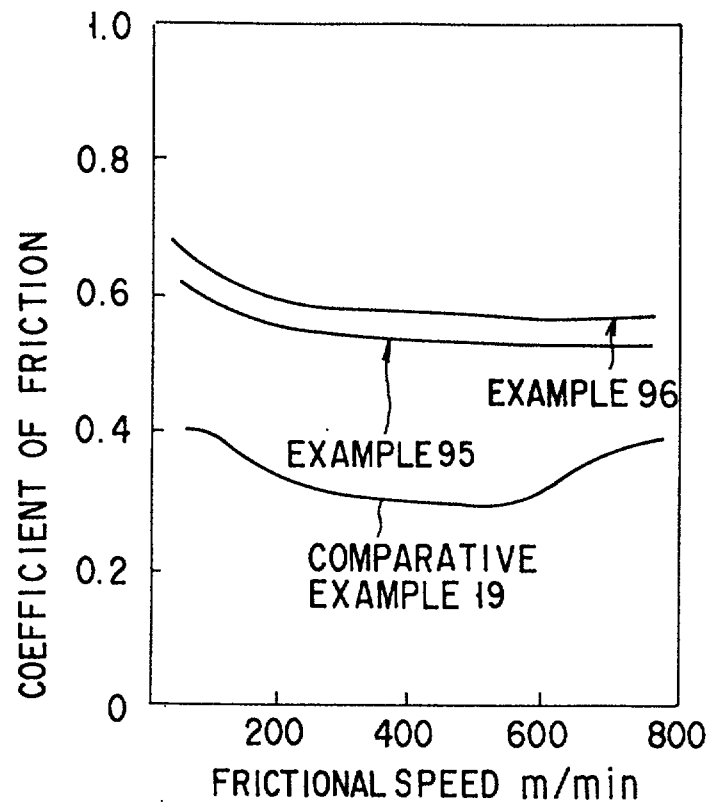


FIG. 26


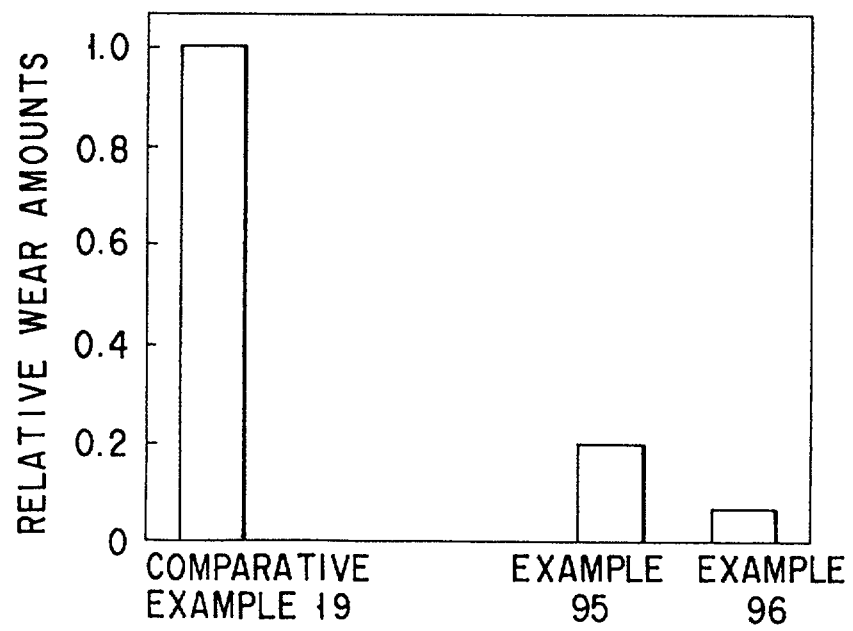


FIG. 27

The brake shoe (42) for elevator emergency stop has a heat resistance to a temperature that exceeds 1000°C as well as a stabilized high coefficient of friction and an excellent seizure-resistance to rails even under the condition of high speed and high stress. This brake shoe for elevator emergency stop comprises a brake body (43) having a braking face and (b) plurality of braking pieces (44) embodied in the braking face side of the brake body to be projected from the braking face. The projection of each of the braking pieces forms a column or a multi-cornered pole having rounded corners. The braking pieces are made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, silicon carbide and sialon, and particles of at least one ceramic material selected from the group consisting of a carbide, a nitride and a boride. The ceramic particles have a particle size in the range of 10 to 150 μm , and dispersed into the ceramic base material.



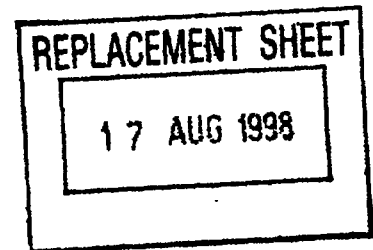


CLAIMS


1. A device for elevator emergency stop
comprising:

an elastic member having a U shape, capable of
opening in a horizontal direction;

a pair of guide members opposing each other and
having outer surfaces contacting the ends of said
elastic member, respectively, and inner surfaces
inclining such that a gap between said guide members
gradually decreases toward the upper ends of said guide
members;

a rail having a T-shaped cross section, positioned



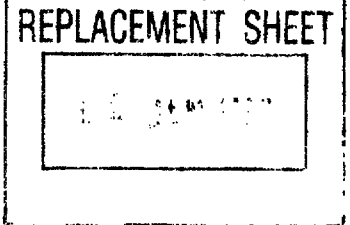

between said guide members and extending in a vertical direction;


5 a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

10 a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake shoes along said guide members, in the case of emergency, to cause said elastic members to press said guide members so that said brake shoes pinch said rail,

wherein said brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged
15 the braking face side, and said braking piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and no less than 10 wt% of at least one ceramic
20 material selected from the group consisting of a silicon carbide whisker and a silicon carbide platelet.

2. An elevator with an emergency stop function comprising:

a cage;
25 an elevating means for elevating the cage;
an elastic member having a U shape, capable of opening in a horizontal direction and is attached to

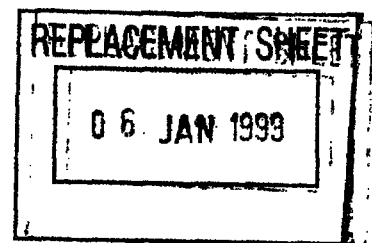

the bottom part of said cage by a supporting means;

a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces
5 inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical
10 direction;

a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking
15 faces opposing each other; and

a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake shoes along said guide members, at the time when said cage falls due to the breakdown of said elevating means,
20 to cause said elastic member to press said guide members so that said brake shoes pinch said rail;

wherein said brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged the braking face side, and said braking piece is made
25 of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide,






and no less than 10 wt% of at least one ceramic material selected from the group consisting of a silicon carbide whisker and a silicon carbide platelet.


3. A device for elevator emergency stop comprising:

an elastic member having a U shape, capable of opening in a horizontal direction;

a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

a rail having a T-shaped cross section, positioned

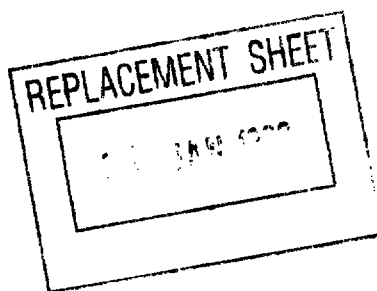

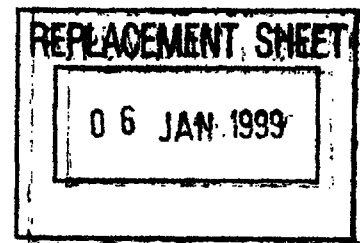

between said guide members and extending in a vertical direction;


5 a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

10 a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake shoes along said guide members, in the case of emergency, to cause said elastic members to press said guide members so that said brake shoes pinch said rail;

15 wherein said brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged the braking face side, and said braking piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and a plurality of ceramic fibers dispersed and
20 embedded in the base material to be present in a vertical state at the braking face.

4. An elevator with an emergency stop function comprising:

25 a cage;
an elevating means for elevating the cage;
an elastic member having a U shape, capable of opening in a horizontal direction and attached to the

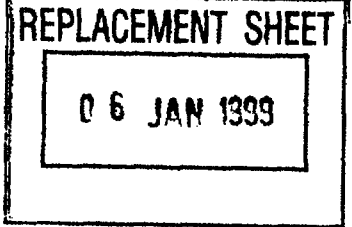

bottom part of said cage by a supporting means;

a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces

5 inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

10 a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical direction;

a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking
15 faces opposing each other; and

a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake shoes along said guide members, at the time when said cage falls due to the breakdown of said elevating means,
20 to cause said elastic member to press said guide members so that said brake shoes pinch said rail;


wherein said brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged the braking face side, and said braking piece is made
25 of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide,



- 99 -

and a plurality of ceramic fibers dispersed and embedded in the base material to be present in a vertical state at the braking face.

5

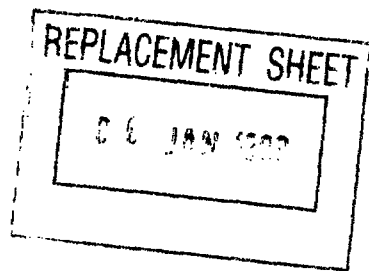

10

15

20

25




- 100 -

5. A device for elevator emergency stop
comprising:

an elastic member having a U shape, capable of
opening in a horizontal direction;

5 a pair of guide members opposing each other and
having outer surfaces contacting the ends of said


10

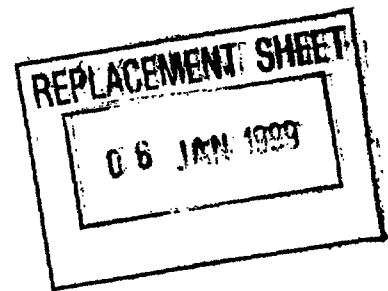

15

20

25

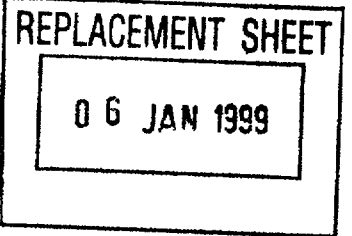

elastic member, respectively, and inner surfaces inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

5 a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical direction;

 a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect
10 to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

 a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake
15 shoes along said guide members, in the case of emergency, to cause said elastic member to press said guide members so that said brake shoes pinch said rail;

 wherein said brake shoe comprises (a) a brake body having a braking face and (b) a plurality of braking
20 pieces embedded in the braking face side of the brake body to be projected from the braking face to form projections of a column or a multi-cornered pole having rounded corners, and

 wherein said braking pieces are made of a
25 composite material containing a ceramic base material selected from the group consisting of silicon nitride, silicon carbide and sialon, and particles of at least



05 JAN 1982

one ceramic material selected from the group consisting of a carbide, a nitride and a boride, each having particle sizes in the range of 10 to 150 μ m and dispersed into the ceramic base material.

5 6 . An elevator with an emergency stop function comprising:

 a cage;

 an elevating means for elevating the cage;

 an elastic member having a U shape, capable of
10 opening in a horizontal direction and attached to the bottom part of said cage by a supporting means;

 a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces
15 inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

 a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical
20 direction;

 a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking
25 faces opposing each other; and

 a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake

shoes along said guide members, at the time when said cage falls due to the breakdown of said elevating means, to cause said elastic members to press said guide members so that said brake shoes pinch said rail;

5 wherein said brake shoe comprises (a) a brake body having a braking face and (b) a plurality of braking pieces embedded in the braking face side of the brake body to be projected from the braking face to form projections of a column or a multi-cornered pole having rounded corners, and

10 wherein said braking pieces are made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, silicon carbide and sialon, and particles of at least
15 one ceramic material selected from the group consisting of a carbide, a nitride and a boride, each having particle sizes in the range of 10 to 150 μm and dispersed into the ceramic base material.


20 7. A device for elevator emergency stop comprising:

an elastic member having a U shape, capable of opening in a horizontal direction;

25 a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide

REPLACEMENT SHEET

06 JAN 1993

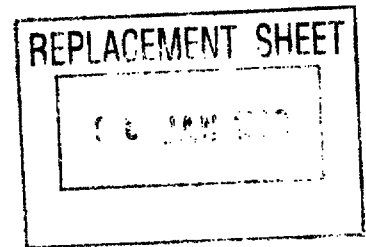

members;

a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical direction;

5 . a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and

10 a pair of pulling means is attached to said brake shoes, respectively, for pulling upward said brake shoes along said guide members, in the case of emergency, to cause said elastic member to press said guide members so that said brake shoes pinch said rail;

15 wherein said elastic has an elastic force for pressing said guide members, which becomes larger as the upper portion of each of said guide members.


20 8. The device according to claim 7, plural elastic members are arranged the outer surfaces of said guide members.

9. An elevator with an emergency stop function comprising:

a cage;

an elevating means for elevating the cage;

25 an elastic member having a U shape, capable of opening in a horizontal direction and attached to the bottom part of said cage by a supporting means;

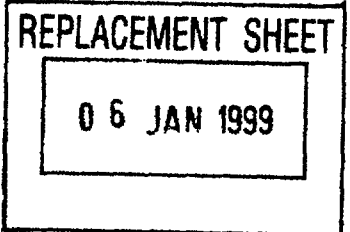

a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical direction;

a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking faces opposing each other; and


a pair of pulling means attached to said brake shoes, respectively for pulling upward said brake shoes along said guide members, at the time when said cage falls due to the breakdown of said elevating means, to cause the elastic members to press said guide members so that said brake shoes pinch said rail;


wherein said elastic member has an elastic force for pressing said guide members, which becomes larger as the upper portion of each of said guide members.

Another object of the present invention is to provide a brake shoe for elevator emergency stop which has a heat resistance to a temperature that exceeds 1000°C as well as a stabilized high coefficient of friction, an excellent seizure-resistance to rail, an excellent impact resistance and a stabilized braking property even under the condition of high speed and high stress.

Another object of the present invention is to provide a device for elevator emergency stop having a stabilized braking property and small size.

Still another object of the present invention is to provide an elevator provided with a device for elevator emergency stop where the cage securely slows down and stops without causing seizure on the rail at the time when the cage of the elevator is caused to fall due to the breakdown of the elevating means of the elevator.

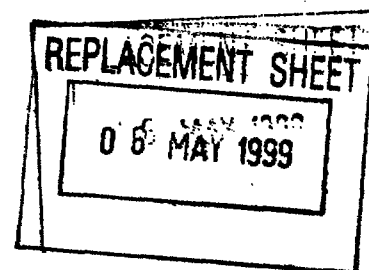

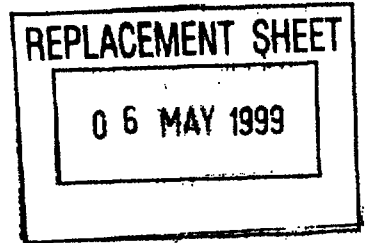

According to the present invention in a first aspect there
is provided a device for elevator emergency stop
5 comprising:


an elastic member having a U shape, capable of
opening in a horizontal direction;

a pair of guide members opposing each other and
having outer surfaces contacting the end of the elastic
10 member, respectively, and inner surfaces inclining such
that a gap between the guide members gradually
decreases toward the upper ends of the guide member;

a rail having a T-shaped cross section, positioned
between the guide members and extending in a vertical
15 direction;

a pair of brake shoes provided in the gap between
the guide members, arranged symmetrically with respect
to the rail, capable of moving vertically along the
inner surfaces of the guide members, and having braking
20 faces opposing each other; and

a pair of pulling means attached to the brake
shoes, respectively, for pulling upward the brake shoes
along the guide members, in the case of emergency, to
cause the elastic member to press the guide members so
25 that the brake shoes pinch the rail. The brake shoe
comprises (a) a brake body having a braking face and
(b) a braking piece arranged on the braking face side.



- 7 -

faces opposing each other; and

a pair of pulling means attached to the brake shoes, respectively, for pulling upward the brake shoes along the guide members, at the time when the cage falls due to the breakdown of the elevating means, to cause the elastic member to press the guide members so that the brake shoes pinch the rail. The brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged on the braking face side.

The brake piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and no less than 10 wt% of at least one ceramic material selected from the group consisting of a silicon carbide whisker and a silicon carbide platelet.

Further, according to the present invention there


20

25

the elastic members to press the guide members so that the brake shoes pinch the rail. The brake shoe comprises (a) a brake body and having a braking face (b) a braking piece arranged on the braking face side.

5 The braking piece is made of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide, and a plurality of ceramic fibers dispersed and embedded in the base material to
10 be present in a vertical state at the braking face.

Further, according to the present invention there

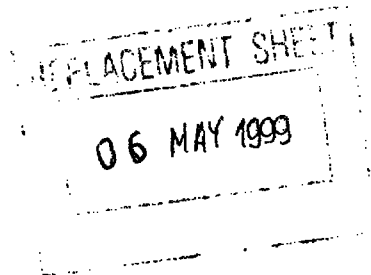

15

20

25



06 MAY 1999

the bottom part of said cage by a supporting means;

a pair of guide members opposing each other and having outer surfaces contacting the ends of said elastic member, respectively, and inner surfaces
5 inclining such that a gap between said guide members gradually decreases toward the upper ends of said guide members;

a rail having a T-shaped cross section, positioned between said guide members and extending in a vertical
10 direction;

a pair of brake shoes provided in the gap between said guide members, arranged symmetrically with respect to said rail, capable of moving vertically along the inner surfaces of the guide members, and having braking
15 faces opposing each other; and

a pair of pulling means attached to said brake shoes, respectively, for pulling upward said brake shoes along said guide members, at the time when said cage falls due to the breakdown of said elevating means,
20 to cause said elastic member to press said guide members so that said brake shoes pinch said rail;

wherein said brake shoe comprises (a) a brake body having a braking face and (b) a braking piece arranged the braking face side, and said braking piece is made
25 of a composite material containing a ceramic base material selected from the group consisting of silicon nitride, titanium boride, sialon and silicon carbide,