

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



G00002



(43) International Publication Date
11 April 2002 (11.04.2002)


PCT

(10) International Publication Number
WO 02/28742 A1

- (51) International Patent Classification⁷: **B65D 81/26**, (74) Agent: CONIMAR AB; Box 2086, S-141 02 Huddinge (SE).
- (21) International Application Number: PCT/SE01/02128 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 2 October 2001 (02.10.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0003599-8 5 October 2000 (05.10.2000) SE (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant and
(72) Inventor: JOHANSSON, Thomas [SE/SE]; Per Kristens gård, S-310 50 Slöinge (SE).

[Continued on next page]

(54) Title: APPARATUS FOR MOISTURE ABSORPTION

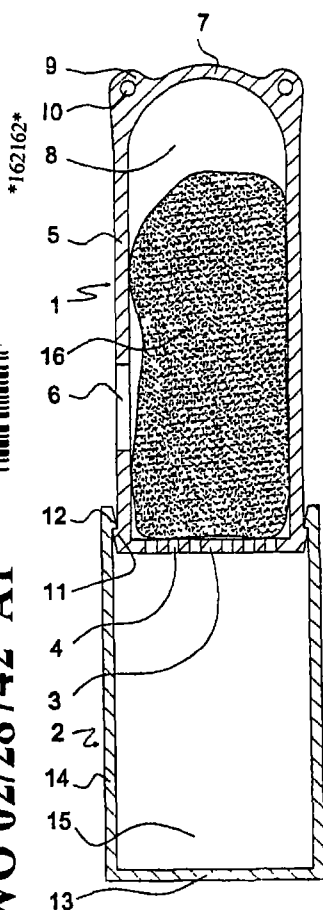

(57) Abstract: A moisture absorption apparatus for transport containers comprises a desiccant container with a side wall, optionally a bottom and means to retain the desiccant in the container. It comprises furthermore a desiccant solution container with a side wall with a side wall and a bottom. The desiccant container is capable of receiving desiccant which forms a desiccant solution on contact with moist air. The desiccant container side wall has at least one air access opening and a passage permitting desiccant solution to flow into the desiccant solution container. The desiccant solution container has a top opening and is slidably displaceable on the desiccant container so as to allow the desiccant container to be displaced in the desiccant solution container to a depth sufficient for the desiccant solution container side wall to fully cover the air access opening of the desiccant container. The apparatus further comprises means to prevent separation of the desiccant container and the desiccant solution container.

WO 02/28742 A1

02/28742
09 MAY 2003

WO 02/28742 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.