
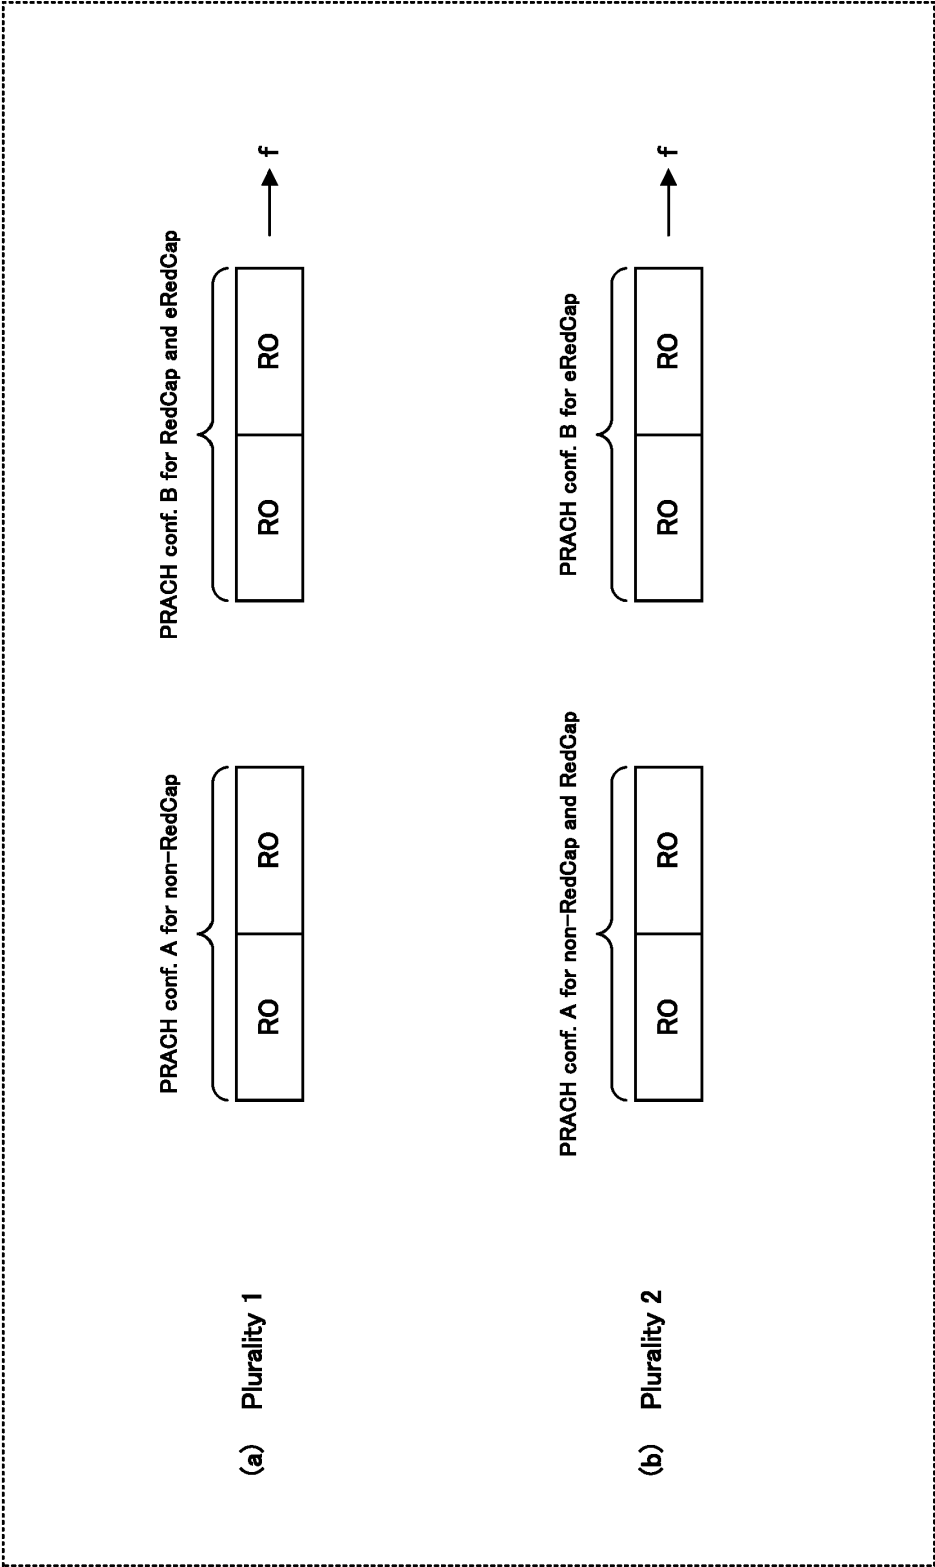



[図1]

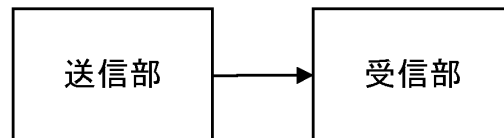


[図2]

100


[図3]

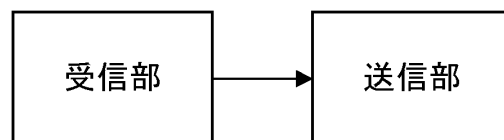200


[図4]

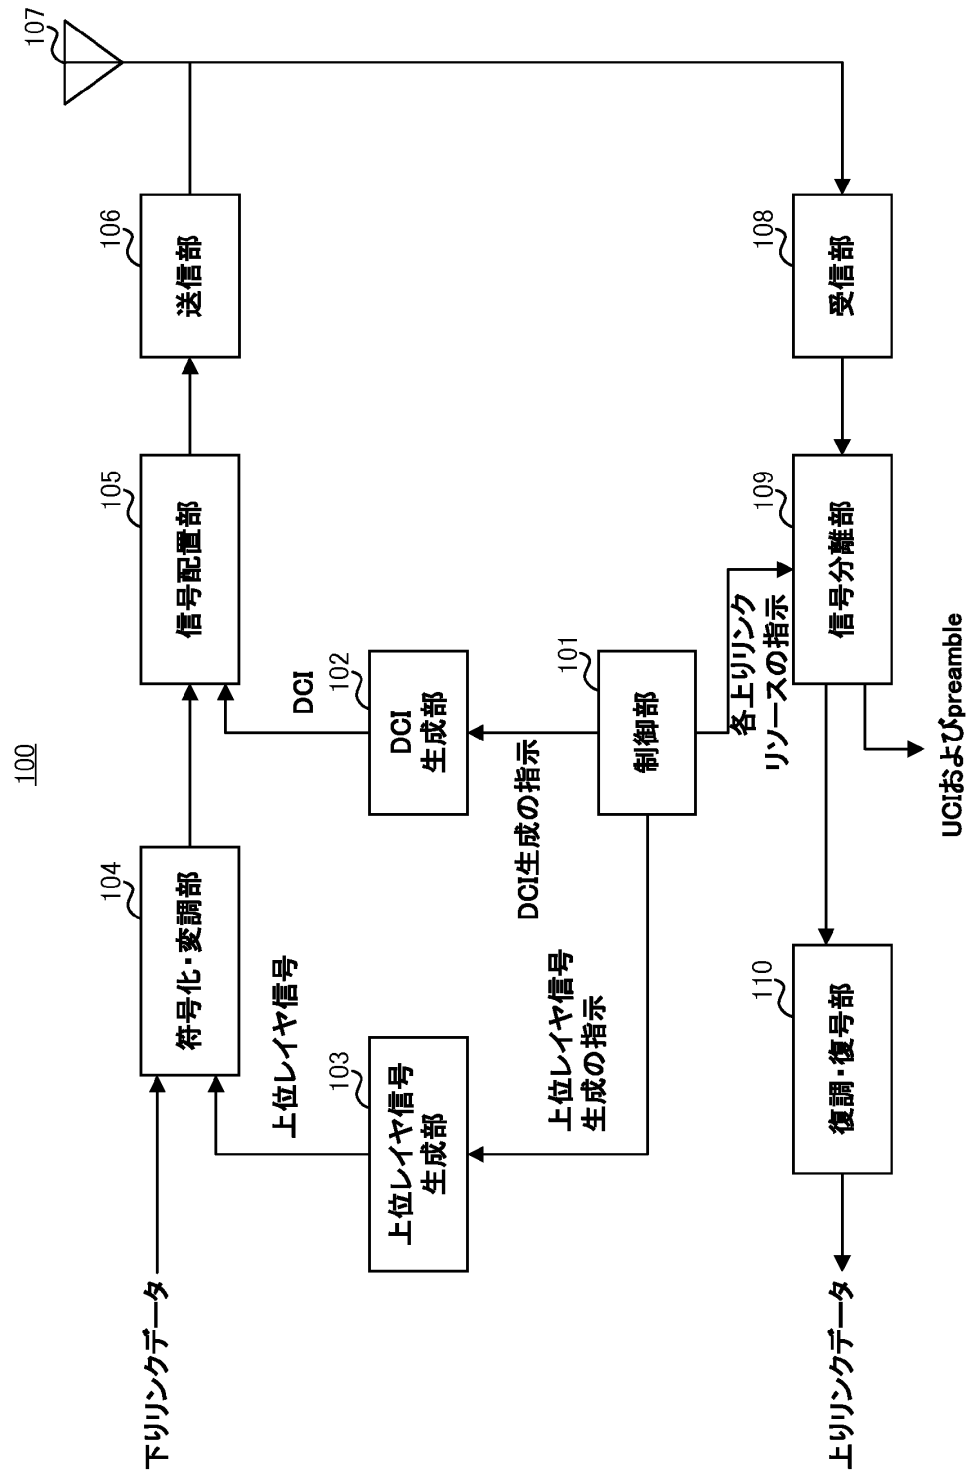


[図5]

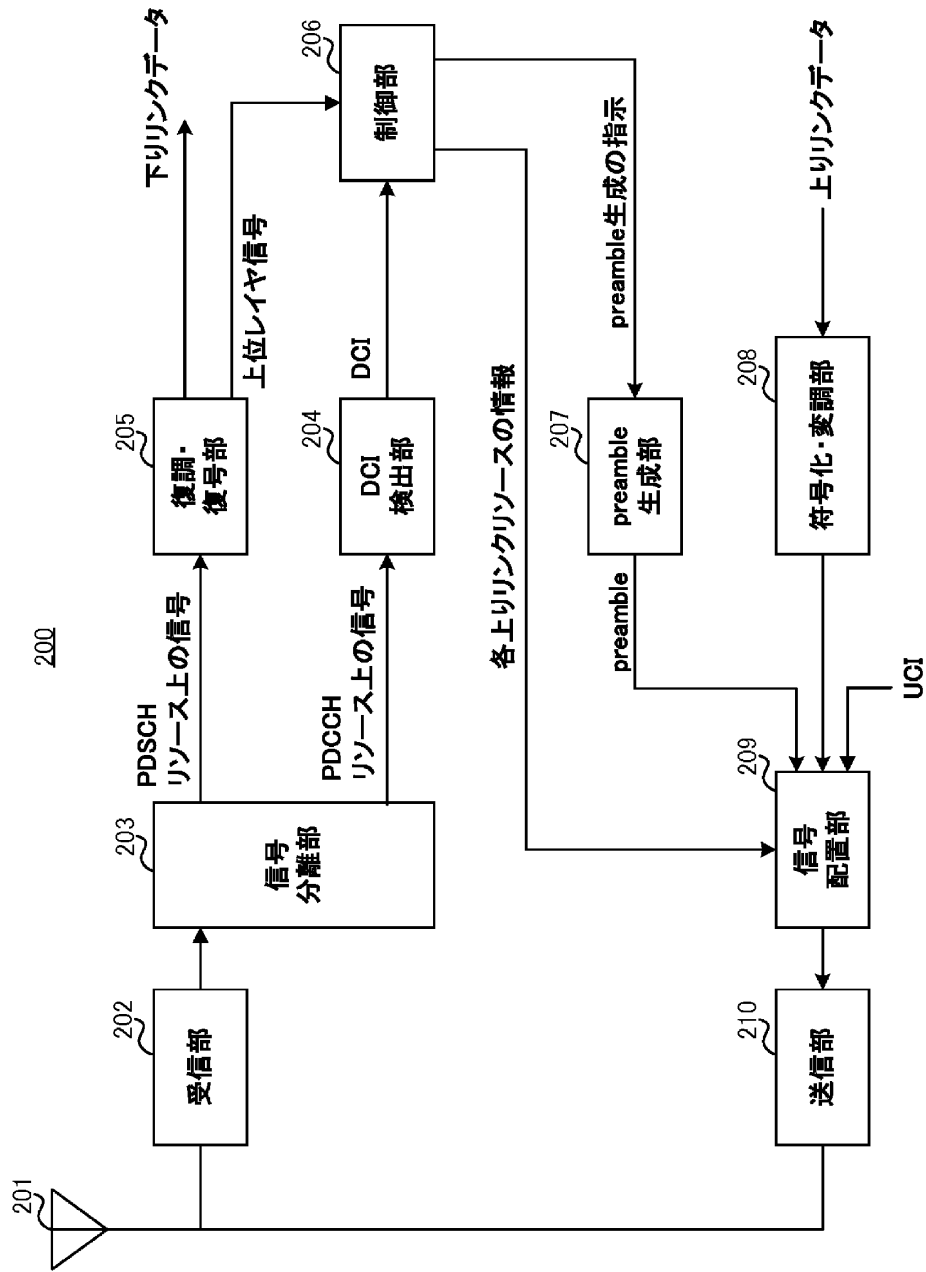


[図6]

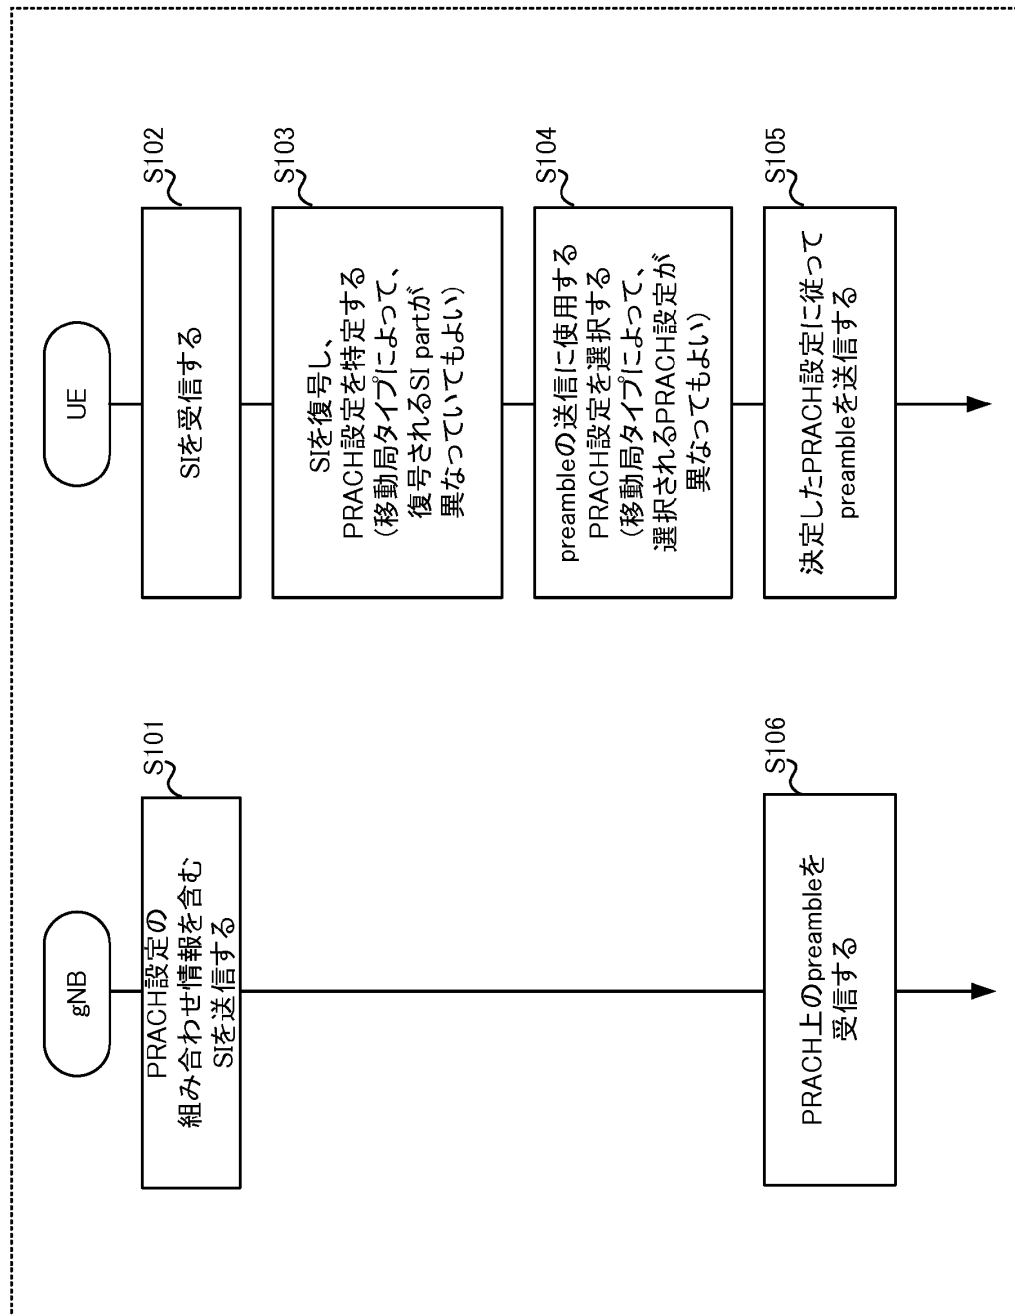


[図7]

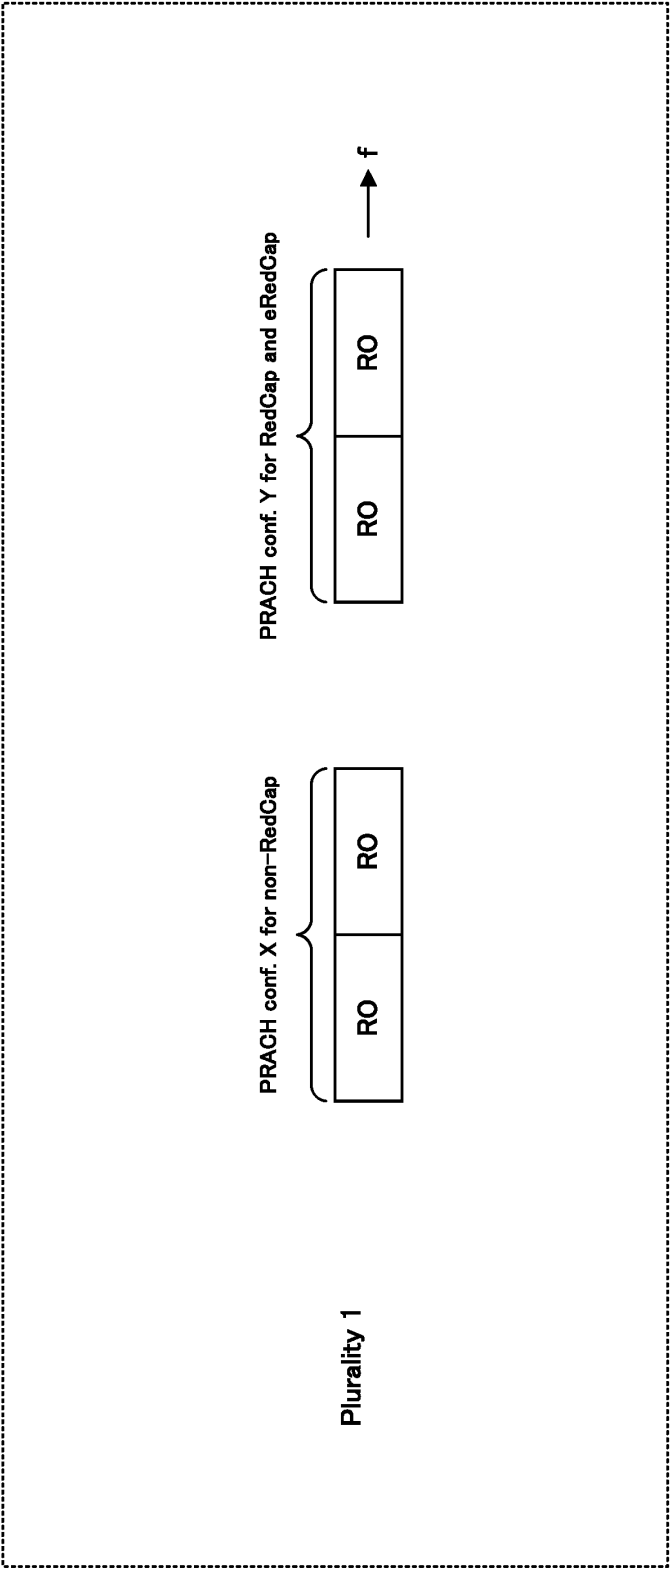


[図8]

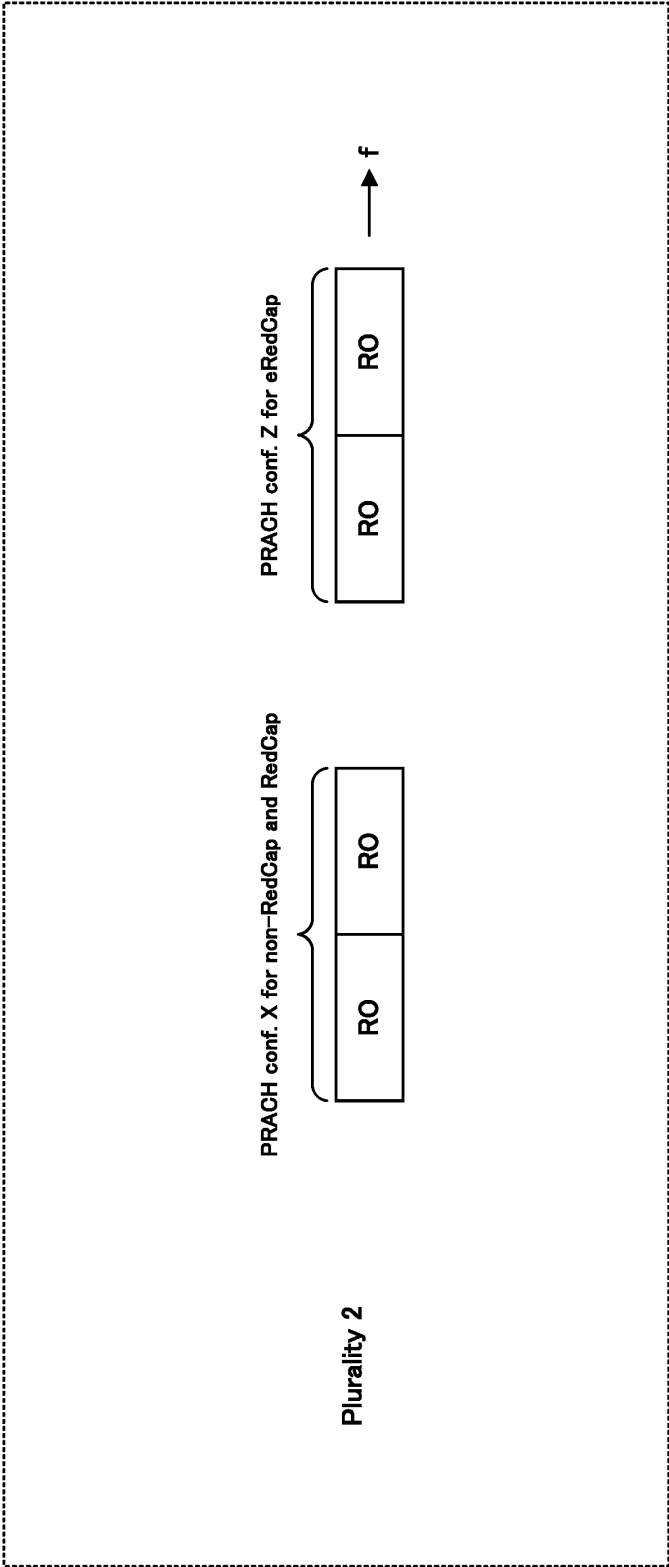

[図9]

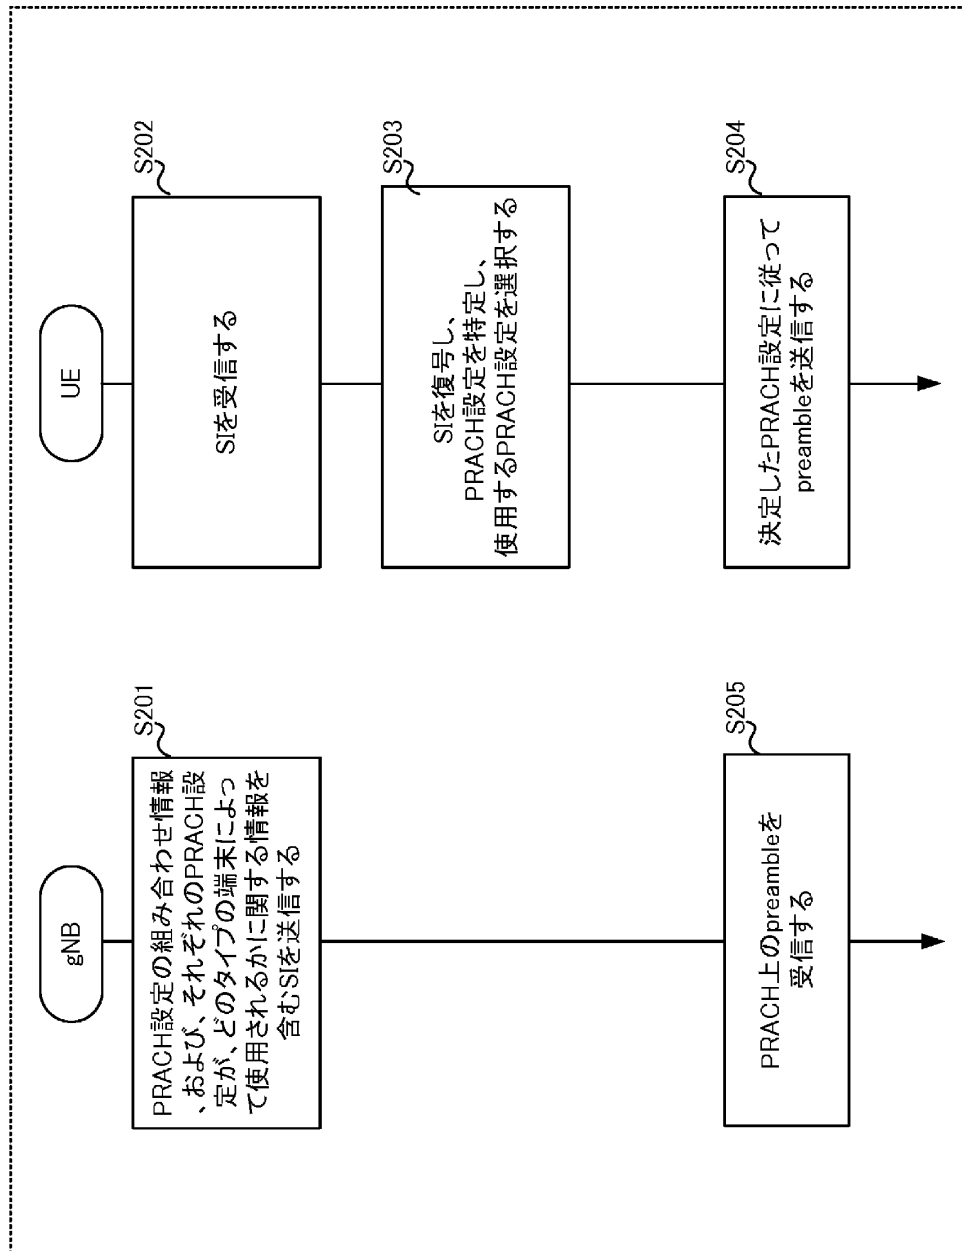


[図10]

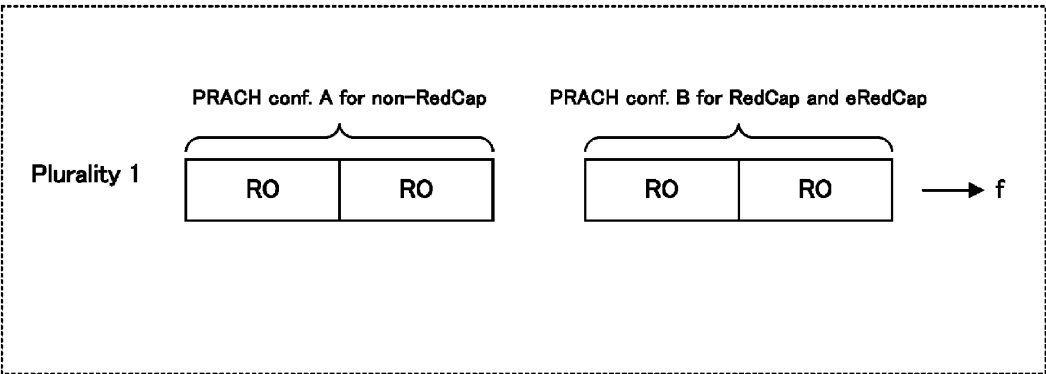

[図11]

UE type	設定タイプ
Non-RedCap	PRACH設定A
RedCap	PRACH設定B
eRedCap	PRACH設定B

[図12]

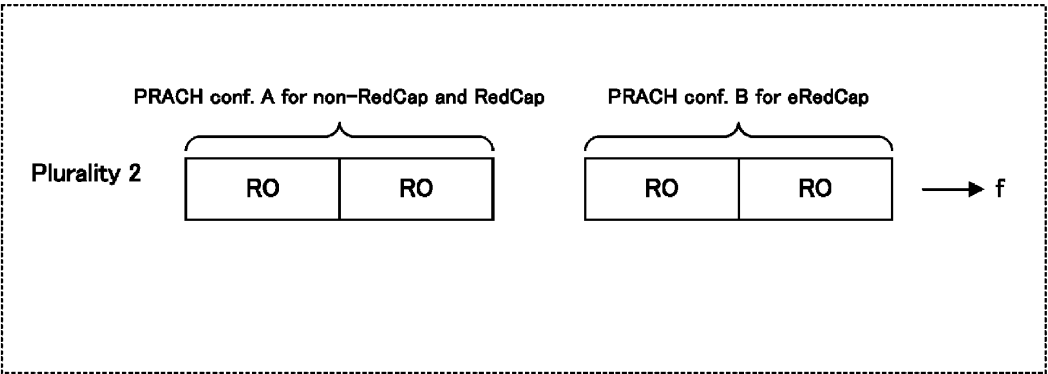

[図13]

UE type	設定タイプ
Non-RedCap	PRACH設定A
RedCap	PRACH設定A
eRedCap	PRACH設定B


[図14]

設定タイプ	Preamble index
PRACH設定A	0-9
PRACH設定B	10-19


[図15]

設定タイプ	PRACH configuration index	Msg1-FDM	Msg1- FrequencyStart
PRACH設定A	0	1	0
PRACH設定B	100	4	20


[図16]

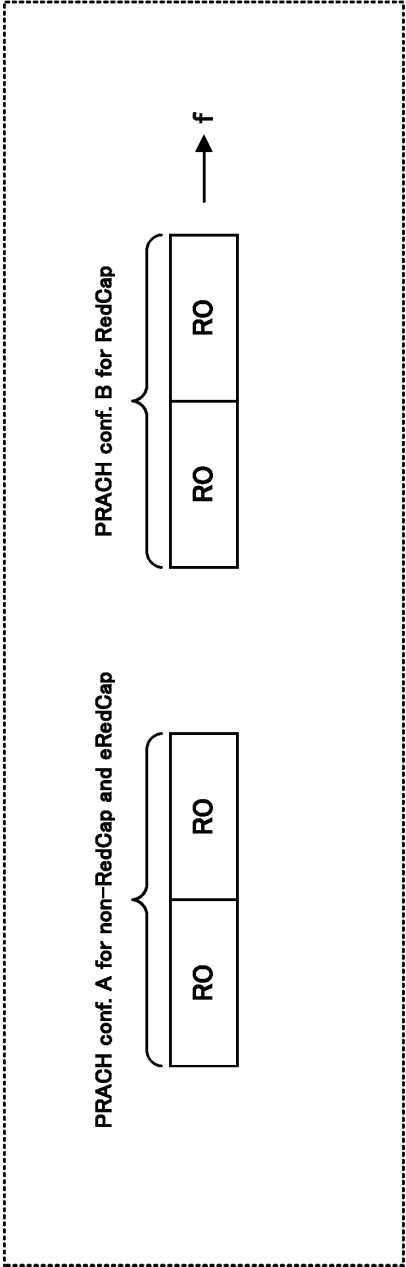


[図17]

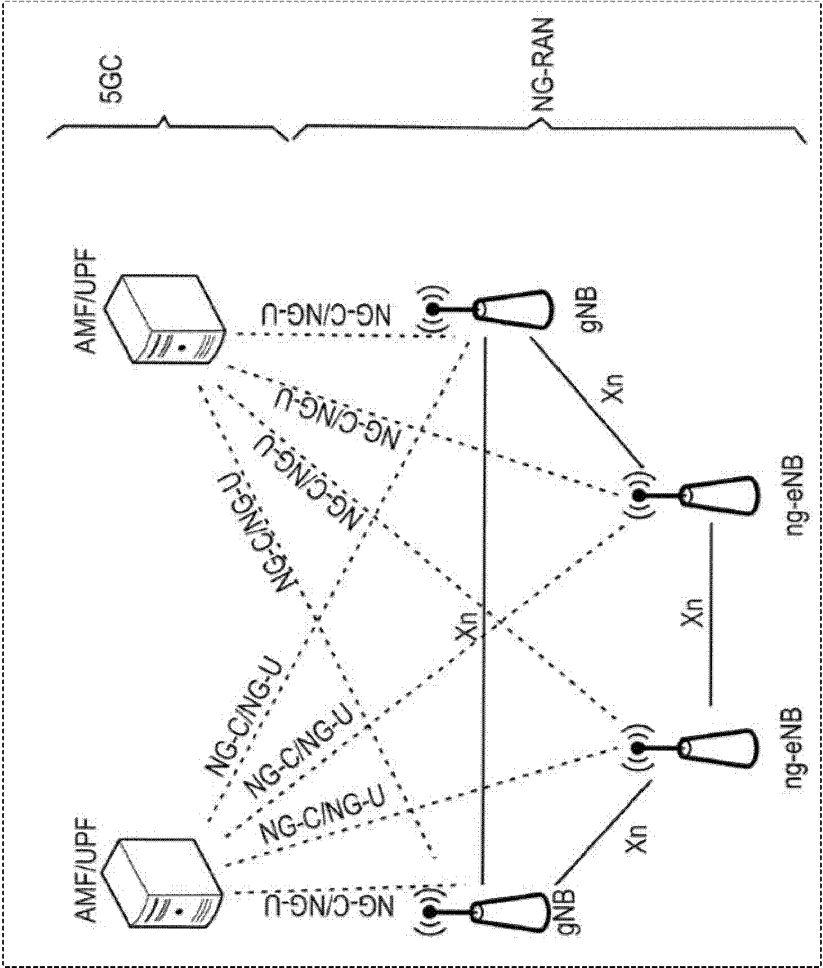


[図18]

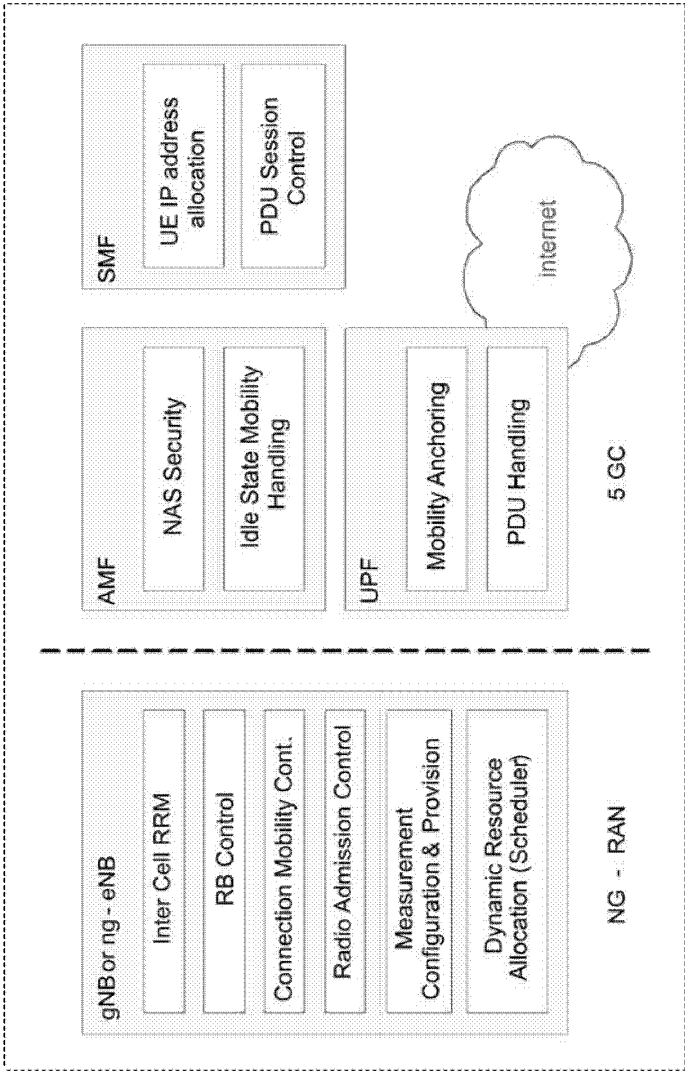

[図19]

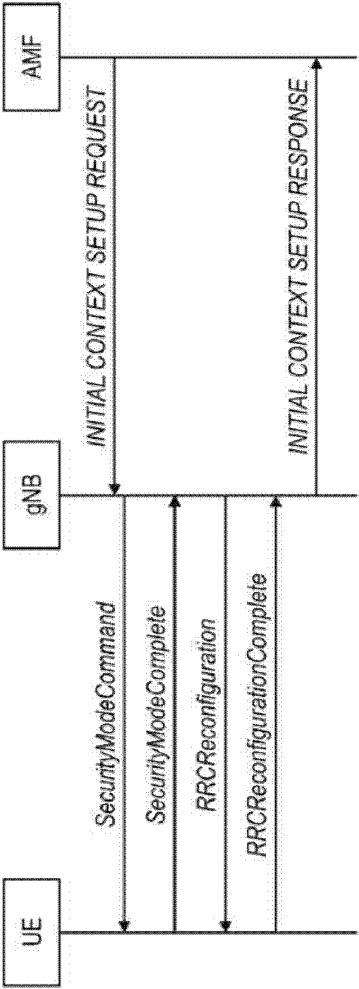

[図20]

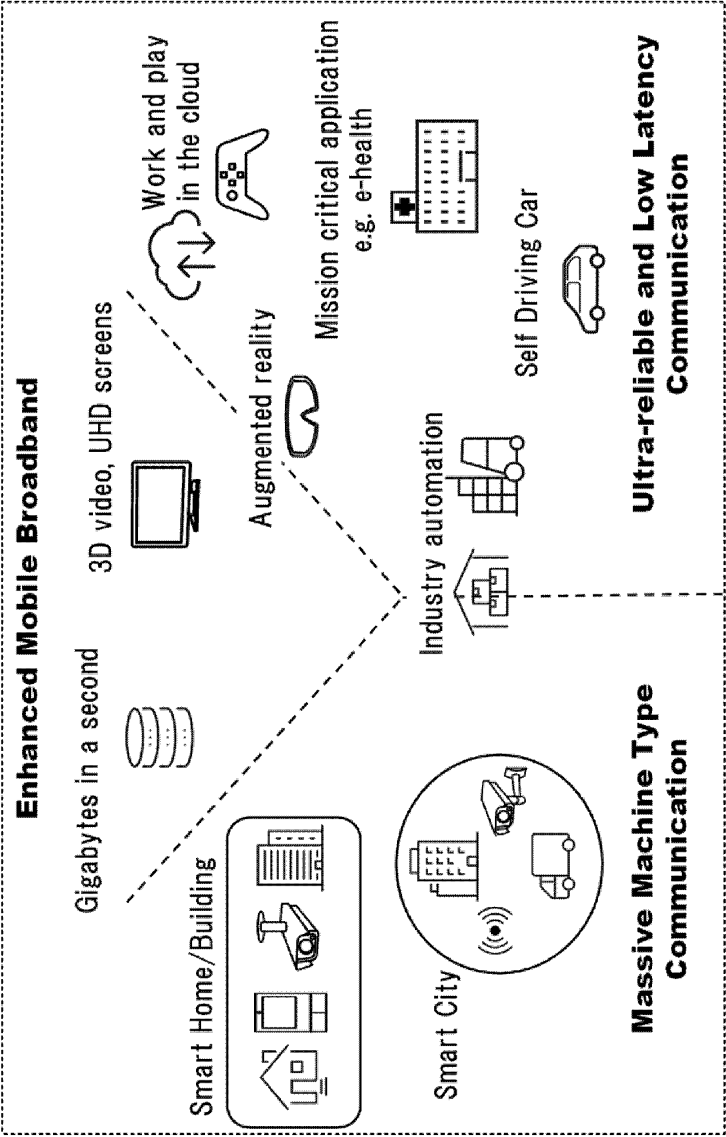

[図21]

