

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
28 September 2023 (28.09.2023)



(10) International Publication Number
WO 2023/183452 A1

(51) International Patent Classification:

B65G 47/66 (2006.01) B65G 15/30 (2006.01)
B65G 47/52 (2006.01)

(21) International Application Number:

PCT/US2023/016011

(22) International Filing Date:

23 March 2023 (23.03.2023)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/323,960 25 March 2022 (25.03.2022) US

(71) Applicant: **FLEXIBLE STEEL LACING COMPANY**
[US/US]; 2525 Wisconsin Avenue, Downers Grove, Illinois
60515 (US).

(72) Inventor: **DRUMMOND, Andrew**; 735 Bristol Avenue
NW, Grand Rapids, Michigan 49504 (US).

(74) Agent: **KRATZ, Rudy** et al.; Fitch, Even, Tabin & Flannery LLP, 120 S. LaSalle Street, Suite 2100, Chicago, Illinois 60603 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,

(54) Title: CONVEYOR TRANSFER GUARDS

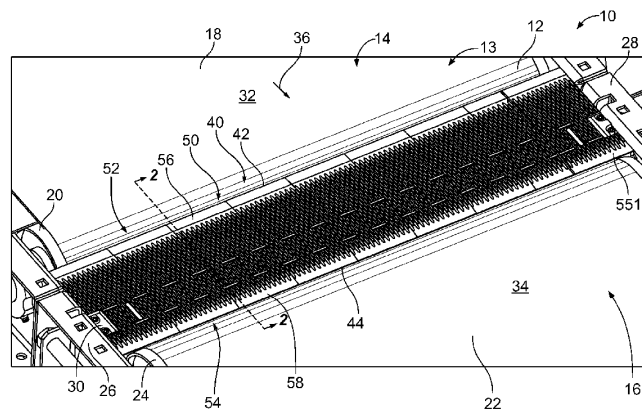


FIG. 1

(57) Abstract: In one aspect of the present disclosure, a transfer guard member is provided for a transfer guard system. The transfer guard member has a unitary, one-piece body configured to connect to an elongate mounting member, an upper surface of the body, and an array of protrusions to support an object. The array of protrusions includes columns of protrusions each comprising a plurality of the protrusions aligned in a first direction. The array of protrusions includes first spacings extending in the first direction between the protrusions of each of the columns. The array of protrusions also includes second spacings extending in a second direction transverse to the first direction between the adjacent columns. The first spacings and the second spacings are each less than twice a height of the protrusions.

[Continued on next page]

DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))