



- (51) International Patent Classification:
E21B 33/12 (2006.01) *E21B 23/06* (2006.01)
- (21) International Application Number:
PCT/US2012/046813
- (22) International Filing Date:
13 July 2012 (13.07.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES, INC** [US/US];
10200 Bellaire Boulevard, Houston, Texas 77072 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **STOKES, Matthew Bradley** [US/US]; 4801 Misty Ridge Dr., Fort Worth, Texas 76137 (US).
- (74) Agents: **CONLEY ROSE, P.C.** et al.; 5601 Grainte Parkway, Suite 750, Plano, Texas 75024 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

- (54) Title: HIGH PRESSURE SEAL BACK-UP

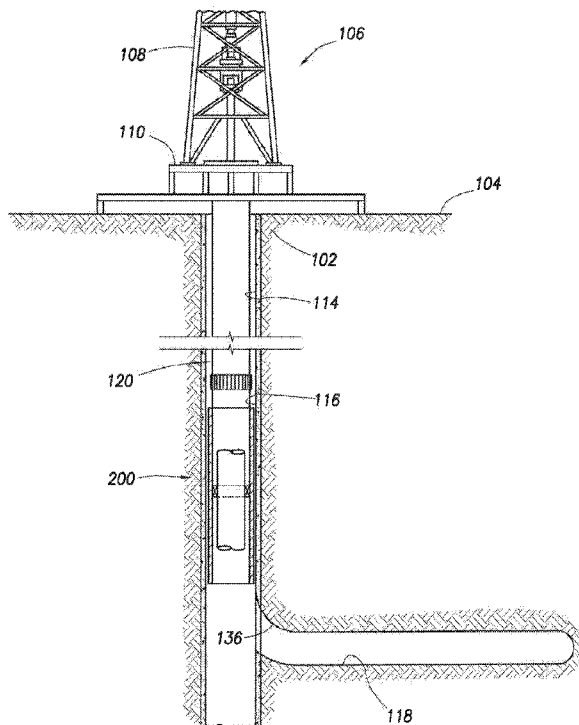


FIG. 1

- (57) Abstract: A seal mechanism for use with a downhole component comprises a first tubular member and a second tubular member, wherein the first tubular member is disposed within the second tubular member and separated therefrom by an extrusion gap; a circumferential groove disposed on the first tubular member; a seal disposed within the circumferential groove, wherein the seal is selectively positionable into engagement with the second tubular member; and a high pressure seal back-up disposed within the circumferential groove, wherein the distance between an inside diameter of the high pressure seal back-up and an outside diameter of the high pressure seal back-up is configured to remain substantially constant when pressure increases on the high pressure seal back-up, and wherein the high pressure seal back-up is configured to have an increase in its outer diameter in response to a pressure increase.



Declarations under Rule 4.17:

Published:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))* — *with international search report (Art. 21(3))*