



(43) International Publication Date
8 November 2012 (08.11.2012)

- (51) International Patent Classification:
B65D 90/00 (2006.01) *B65D 90/18* (2006.01)
- (21) International Application Number:
PCT/IB2011/051994
- (22) International Filing Date:
5 May 2011 (05.05.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **JAYC-IP GMBH** [DE/DE]; Mittelstrasse 12a, 99425 Weimar (DE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HEROLD, Jens-Christian** [DE/DE]; Mittelstrasse 12a, 99425 Weimar (DE).
- (74) Agents: **ROHDE, Vibeke** et al.; Awapatent A/S, Rigsensgade 11, DK-1316 København K (DK).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) Title: A CONTAINER HANDLING AND FLOW SYSTEM, USE THEREOF AND METHOD OF HANDLING CONTAINERS

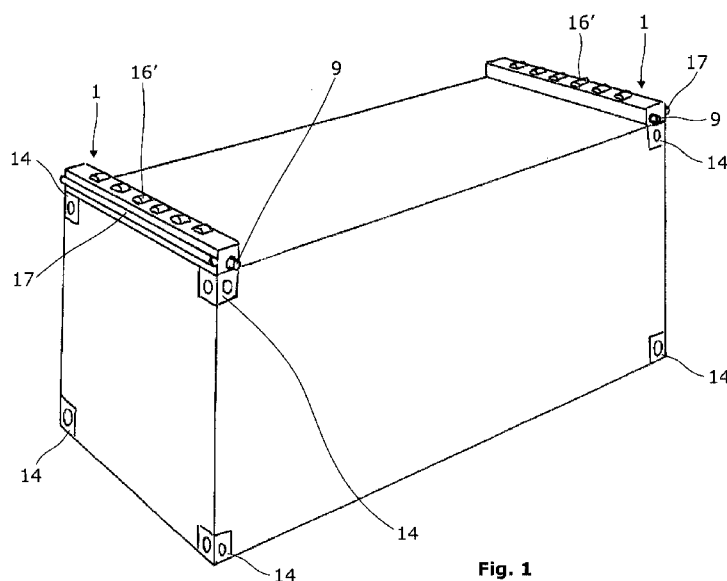


Fig. 1

- (57) Abstract: A container handling and flow system comprising a plurality of base elements (1, 31) for mounting on top of containers and fasteners for locking the base elements on to corner fittings (14) of a container. The base elements are elongate and have a length corresponding to the width of the containers to be handled, said system possibly including base elements of different lengths corresponding to different container standards. The fasteners are arranged one at each end of the base element at a distance corresponding to the distance between the corner fittings. The base elements have sufficient strength and stiffness for allowing the load of a second or more container(s) resting on top of or moving across a pair of base elements mounted on a first container.

