



(51) International Patent Classification:
F16L 55/38 (2006.01)

(21) International Application Number:
PCT/US2010/045158

(22) International Filing Date:
11 August 2010 (11.08.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/539,696 12 August 2009 (12.08.2009) US

(71) Applicant (for all designated States except US): **TDW DELAWARE, INC.** [US/US]; 1100 Market Street, Suite 780, Wilmington, Delaware 19801 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LUDLOW, Jed** [US/US]; 1447 E. 1200 S., Bountiful, Utah 84010 (US). **GLASS, Keith** [CA/CA]; 37 Luverne Avenue, Toronto, Ontario M3H 1R7 (CA). **WARKENTIN, Jonathan** [CA/CA]; 287 Cornelius Pky., Toronto, Ontario M3K 1T6 (CA). **LAURSEN, Paul** [DK/CA]; 34 Crossburn Drive, North York, Ontario M3B 2Z2 (CA).

(74) Agents: **ROSSLER, Paul E.** et al.; Gable Gotwals, 100 West 5th Street, 10th Floor, Tulsa, Oklahoma 74103 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SPEED CONTROL DRIVE SECTION WITH FAILSAFE VALVE

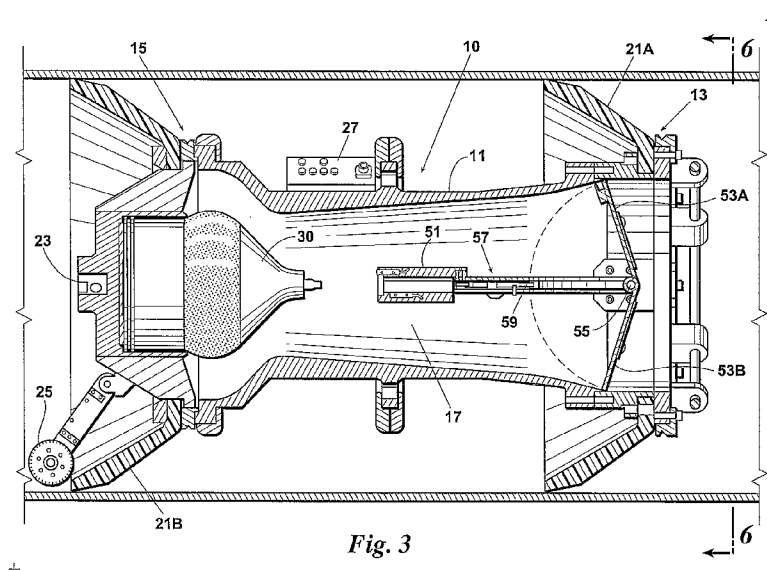

(57) Abstract: A system and method for retrieving a pipeline tool from a pipeline includes a speed control drive section that includes a primary bypass flow valve and a failsafe valve located in a central bypass flow passageway of the drive section. The failsafe valve is placed under the control of a controller. The controller is programmed to release the failsafe valve under prescribed failure conditions. An actuating means moves the failsafe valve between a normally opened positioned and a closed position in response to the controller.