

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(10) 国际公布号
WO 2023/246304 A1

(43) 国际公布日
2023 年 12 月 28 日 (28.12.2023) **WIPO | PCT**

(51) 国际专利分类号:
G06V 10/12 (2022.01)

(21) 国际申请号: PCT/CN2023/091351

(22) 国际申请日: 2023 年 4 月 27 日 (27.04.2023)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
202210715833.0 2022年6月22日 (22.06.2022) CN

(71) 申请人: 腾讯科技(深圳)有限公司 (TENCENT TECHNOLOGY (SHENZHEN) COMPANY LIMITED) [CN/CN]; 中国广东省深圳市南山区高新区科技中一路腾讯大厦35层, Guangdong 518057 (CN)。

(72) 发明人: 游锦(YOU, Jin); 中国广东省深圳市南山区高新区科技中一路腾讯大厦35层, Guangdong 518057 (CN)。唐惠忠(TANG, Huizhong); 中国广东省深圳市南山区高新区科技中一路腾讯大厦35层, Guangdong 518057 (CN)。王少鸣(WANG, Shaoming); 中国广东省深圳市南山区高新区科技中一路腾讯大厦35层, Guangdong 518057 (CN)。郭润增(GUO, Runzeng); 中国广东省深圳市南山区高新区科技中一路腾讯大厦35层, Guangdong 518057 (CN)。

(74) 代理人: 北京励诚知识产权代理有限公司(BEIJING LISENG INTELLECTUAL PROPERTY AGENCY LTD.); 中国北京市海淀区阜成路73号裕惠大厦B座807, Beijing 100142 (CN)。

(81) 指定国(除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG,

(54) Title: OBJECT IDENTIFICATION METHOD, APPARATUS, AND DEVICE, AND STORAGE MEDIUM

(54) 发明名称: 物体识别方法、装置、设备及存储介质

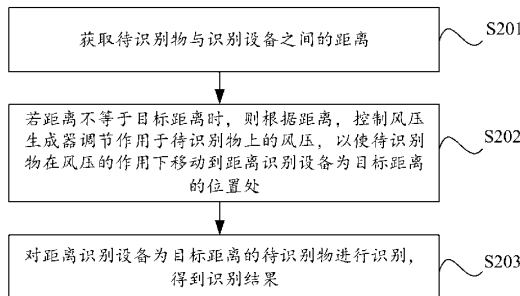


图 2

- S201 Obtain a distance between an object to be identified and an identification device
S202 If the distance is not equal to a target distance, according to the distance, control a wind pressure generator to adjust wind pressure acting on said object, so that under the action of the wind pressure, said object moves to a position at the target distance from the identification device
S203 Identify said object at the target distance from the identification device to obtain an identification result

(57) Abstract: The present application provides an object identification method, apparatus, and device, and a storage medium, which can be applied to various scenes such as safety protection, cloud technology, artificial intelligence, smart transportation, and assisted driving. The method comprises: an identification device obtaining a distance between an object to be identified and the identification device; if the distance is not equal to a target distance, according to the distance, controlling a wind pressure generator to adjust wind pressure acting on said object, so that under the action of the wind pressure, said object moves to a position at the target distance from the identification device; and identifying said object at the target distance from the identification device to obtain an identification

[见续页]

BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

- (84) 指定国(除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:

— 包括国际检索报告(条约第21条(3))。

result. According to the embodiments of the present application, the wind pressure acting on said object is determined according to the distance between said object and the identification device. Therefore, said object can obtain an accurate movement distance according to the sensed wind pressure, so that said object can move to the position at the target distance from the identification device by means of a few times of movement, thereby improving the object identification efficiency, and improving the identification experience.

(57) 摘要: 本申请提供了一种物体识别方法、装置、设备及存储介质, 可以应用于安防、云技术、人工智能、智慧交通、辅助驾驶等各种场景, 该方法包括: 识别设备通过获取待识别物与识别设备之间的距离; 若距离不等于目标距离时, 则根据距离, 控制风压生成器调节作用于待识别物上的风压, 以使待识别物在风压的作用下移动到距离识别设备为目标距离的位置处; 对距离识别设备为目标距离的待识别物进行识别, 得到识别结果。本申请实施例中, 作用于待识别物上的风压是根据待识别物与识别设备之间的距离确定的, 因此, 待识别物可以根据感受到的风压得到准确的移动距离, 这样, 待识别物通过少数几次移动, 可以移动至目标距离, 进而提高了物体识别效率, 提升了识别体验。