


(a)

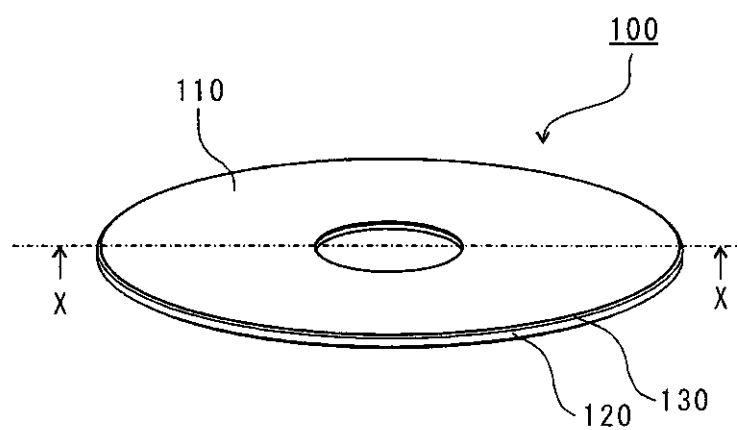

(b)

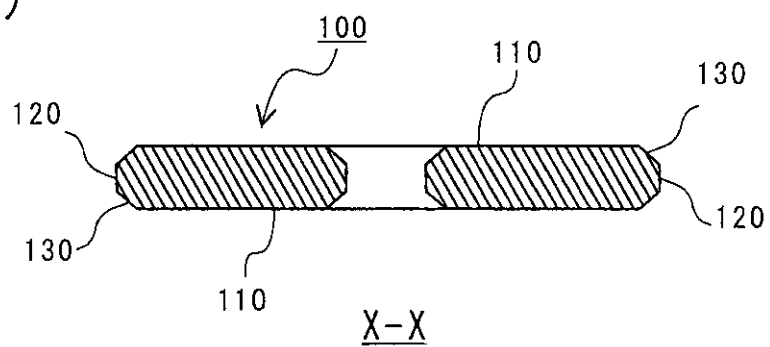


图 1

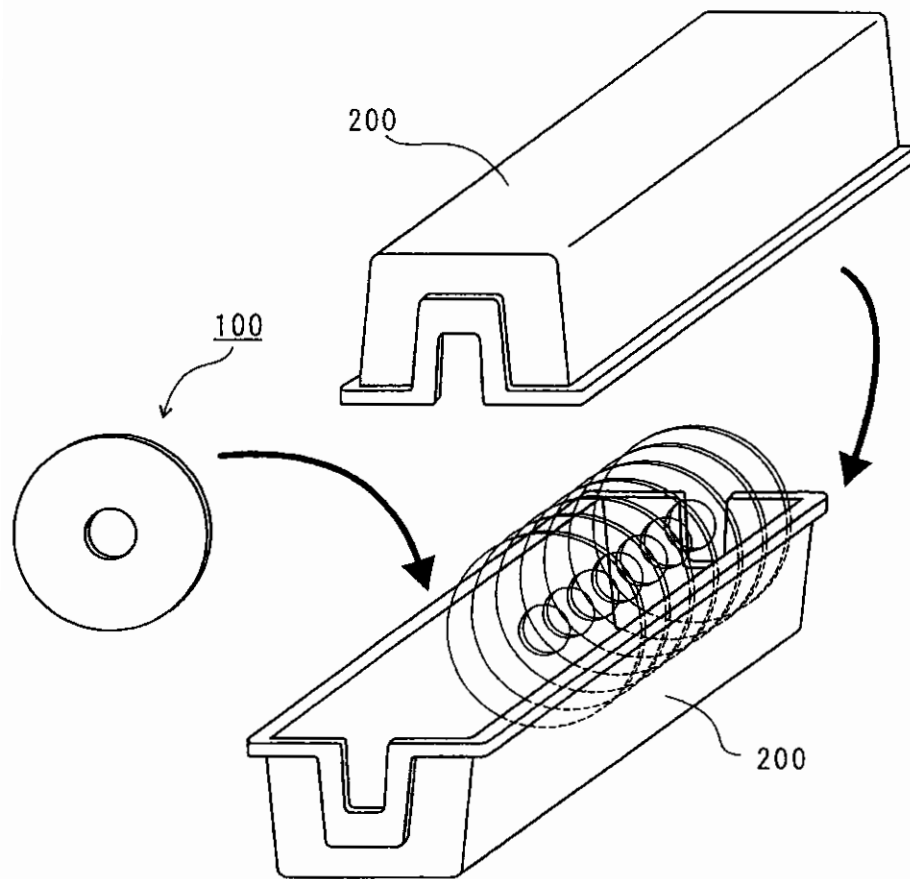


图 2A

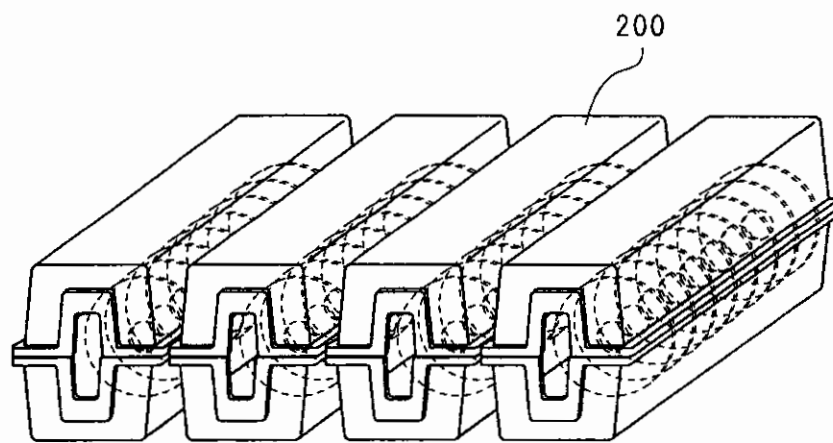


图 2B

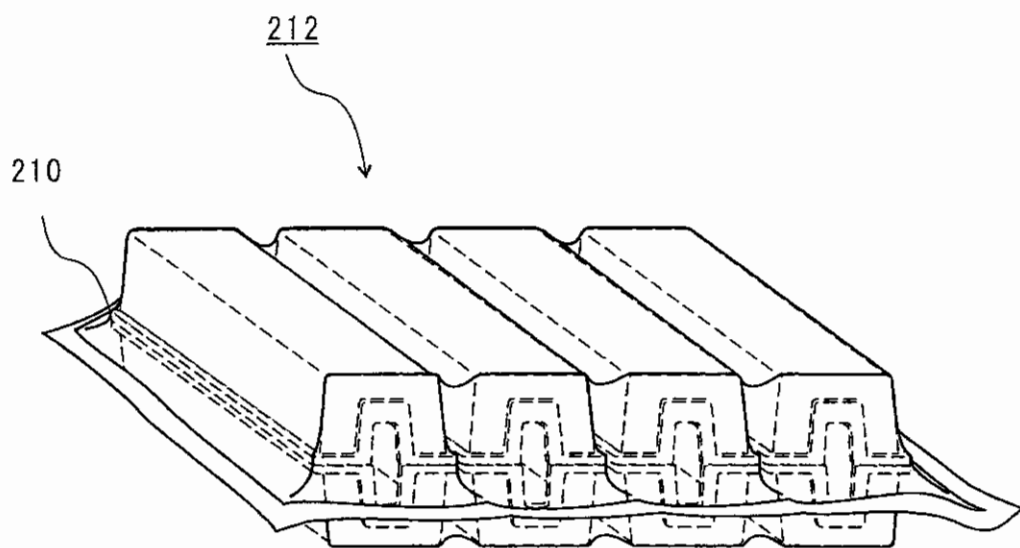


図3A

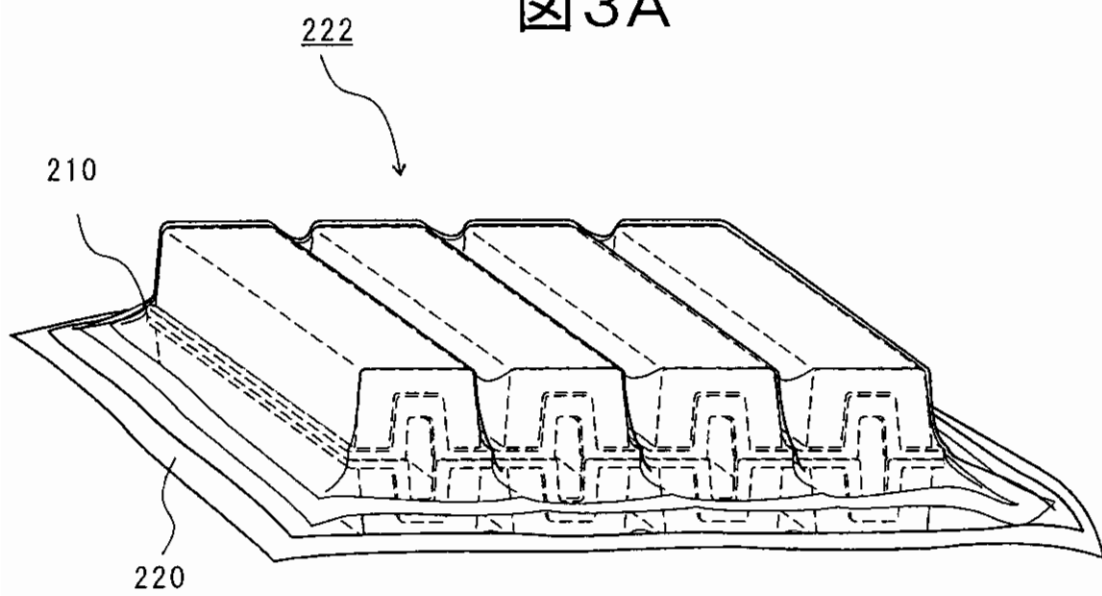


図3B




図4B

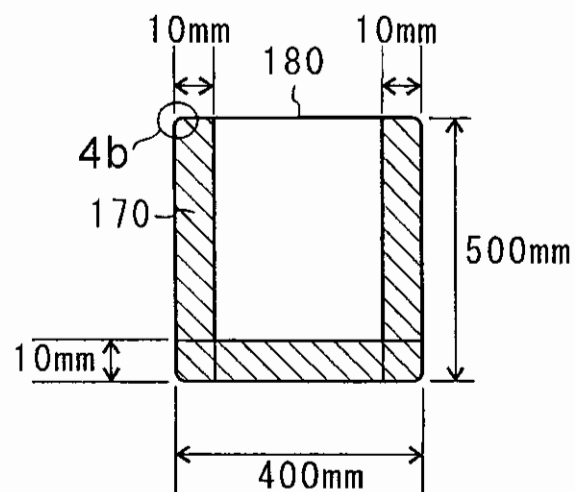


図4A

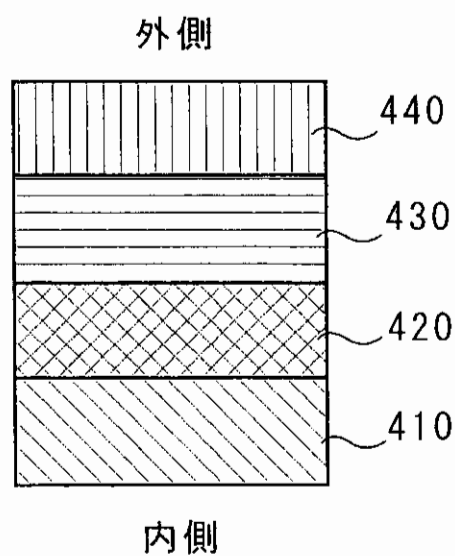


図5

項目	単位	基準値
ヒートシール強度	N/15mm	>24.5
水蒸気透過率	$\text{g/m}^2 \cdot \text{day}$ (40°C × 90%)	<0.1
酸素透過率	$\text{cc/m}^2 \cdot \text{day}$ (30°C × 70%)	<0.1
引裂強度	g	>50
耐突刺強度	kg	>12

図6

高温高湿/5日間 テスト結果 (ガラス基板 100枚あたり)

検査対象	サンプルNo.	平均パーティクル数(カウント/面)
本実施形態(二重梱包) 温度50°C、湿度60%RH	1	3
	2	5
	3	5
比較例(一重梱包) 温度50°C、湿度60%RH	4	26
	5	32
	6	28

図7