

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 December 2003 (24.12.2003)

(10) International Publication Number
WO 03/105740 A1

PCT

(51) International Patent Classification⁷: A61F 13/56,
A44B 11/00

(21) International Application Number: PCT/US03/18153

(22) International Filing Date: 10 June 2003 (10.06.2003)

(25) Filing Language: English

(26) **Publication Language:** English

(30) Priority Data:
10/171,249 13 June 2002 (13.06.2002) US

(71) Applicant: THE PROCTER & GAMBLE COMPANY
[US/US]; One Procter & Gamble Plaza, Cincinnati, OH
45202 (US).

(72) Inventors: **KLINE, Mark, J;** 6318 Alert New London Road, Okeana, OH 45053 (US). **ROBLES, Miguel,**


Alvaro; 657 Flagstaff Drive, Wyoming, OH 45215 (US). **DOBRIN, George, Christopher;** 4407 Hyacinth Drive, Mason, OH 45040 (US). **GOULAIT, David, J., K.;** 7176 Eagles Wing Drive, West Chester, OH 45069 (US). **DYESS, James, W.;** 7812 Spencer Brook Drive, Summerfield, NC 27358 (US). **WELCH, David, Porter;** 8990 Mimosa Lane, West Chester, OH 45069 (US). **BECKMAN, Tracey, Elaine;** 1753 Cottontail Drive, Milford, OH 45150 (US). **RAYCHECK, Jeromy, T.;** 310 Locust Forge Lane, Lebanon, OH 45036 (US).

(74) Agents: REED, T., David et al.; The Procter & Gamble Company, 6110 Center Hill Road, Cincinnati, OH 45224 (US).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,

[Continued on next page]

(54) Title: HIGHLY FLEXIBLE AND LOW DEFORMATION FASTENING DEVICE

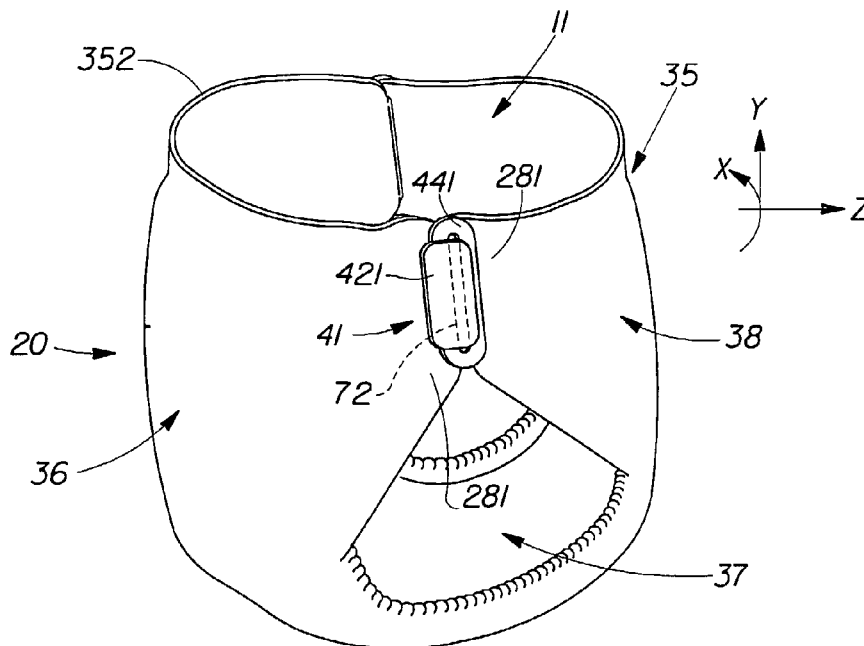

(S7) Abstract: A strong, easy to use high flexibility, low deformation in plane engagement fastening device suitable for use with articles. The fastening device provides a preferred combination of fastenability, flexibility, load bearing, and minimal deformation. The in plane engagement fastening device simplifies and facilitates proper fastener alignment during the fastening process. The fastening device may a projectile and a receptacle. The projectile is passed into or through the receptacle to engage the fastening device.



MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN,
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*