



(51) International Patent Classification:

F04C 9/00 (2006.01) *F04C* 29/12 (2006.01)
F04C 28/14 (2006.01) *F04C* 15/06 (2006.01)
F04C 21/00 (2006.01)

(21) International Application Number:

PCT/AU2010/001515

(22) International Filing Date:

12 November 2010 (12.11.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2009905515 12 November 2009 (12.11.2009) AU

(71) Applicant (for all designated States except US): **EXODUS R & D PTY LTD** [AU/AU]; 44 Commercial Road, Salisbury, South Australia 5108 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FLENCHÉ, George** [AU/AU]; 5 Dyer Street, Elizabeth Downs, South Australia 5113 (AU).

(74) Agent: **LESICAR PERRIN**; 58 Rundle Street, Kent Town, SA 5067 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLUID COMPRESSOR OR PUMP APPARATUS

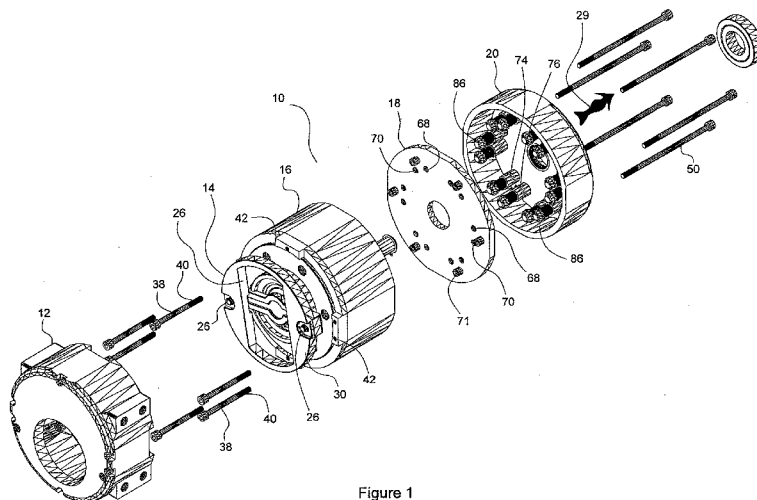


Figure 1

(57) Abstract: The present invention relates to an apparatus which may be in the form of a pump or compressor and which can function to compress or accelerate a fluid such as air, gas, gaseous mixtures and/or liquid. In particular, the invention provides a mechanism in which fluid can be admitted and then discharged continuously from each of the radial compartments that make up the compressor chamber.