

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/006108 A1

(51) International Patent Classification⁷: **G06F 13/40**
(21) International Application Number:
PCT/US2002/020778

(22) International Filing Date:
21 November 2001 (21.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/739,388 19 December 2000 (19.12.2000) US

(71) Applicant: **INTEL CORPORATION** [US/US]; 2200
Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventor: **YOUNG, Gene, F.**; 635 Brandon Court, Lex-
ington, SC 29702 (US).

(74) Agent: **ABERCROMBIE, Grace**; Blakely, Sokoloff,
Taylor & Zafman LLP, 1279 Oakmead Parkway, Sunnys-
vale, CA 94086 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA,
ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: HIGH DENSITY SERVERLETS UTILIZING HIGH SPEED DATA BUS

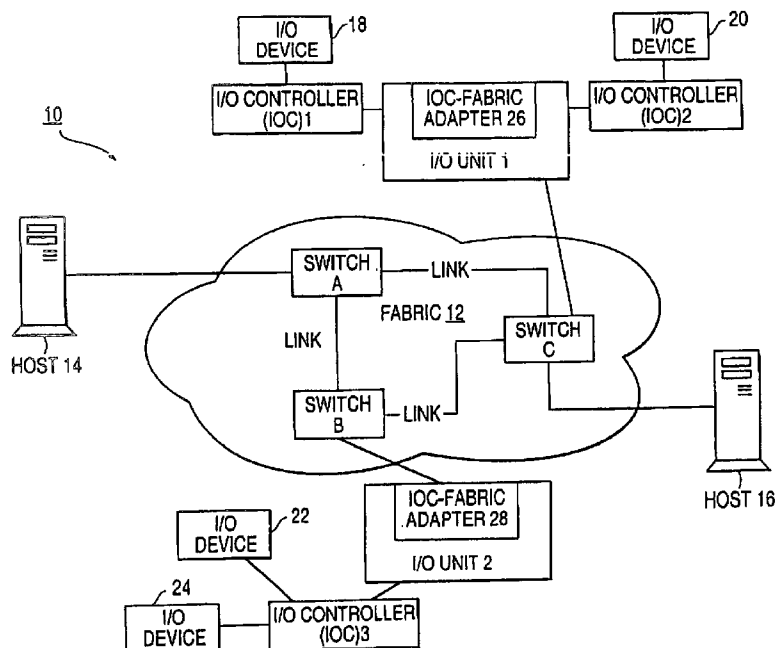

(57) Abstract: A system module is provided for coupling a switch fabric network to I/O resources such as a first disk system and a second disk system. The system module may include a first serverlet, a second serverlet and a first switching device coupled to each of the first serverlet and the second serverlet and to each of the I/O resources such that the first serverlet and the second serverlet share the I/O resources.

WO 2004/006108 A1