



(51) International Patent Classification:

A47B 17/03 (2006.01) A47B 21/03 (2006.01)
A47B 83/02 (2006.01) A47B 23/02 (2006.01)
A47B 96/18 (2006.01) A47C 7/70 (2006.01)

(21) International Application Number:

PCT/NO2010/000366

(22) International Filing Date:

19 October 2010 (19.10.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20093169 19 October 2009 (19.10.2009) NO

(71) Applicant (for all designated States except US): **EKO-RNES ASA** [NO/NO]; N-6222 Ikornnes (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JARNES, Webjørn** [NO/NO]; Sørestrandveien 790, N-6222 Ikornnes (NO).

(74) Agent: **OSLO PATENTKONTOR AS**; Postboks 7007 M, N-0306 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: **TELESCOPIC ARM FOR A PC TABLE**

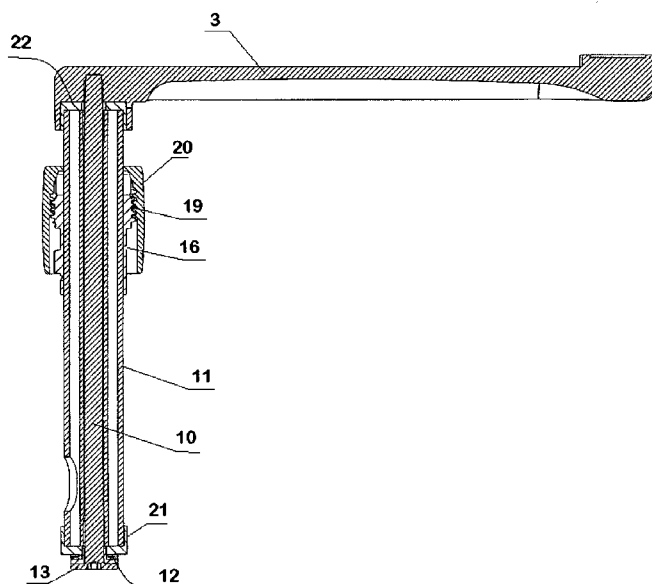


Fig. 3

(57) Abstract: Rotating telescopic column that includes an outer sleeve (7) with a number of interior cams, a telescopic sleeve (11) located inside the outer sleeve (7) and that has a corresponding number of outer slots (15), as the cams in the outer sleeve (7) is designed to intervene in the slots (15) in the telescopic sleeve (11) and thereby prevents the telescopic sleeve from turning relative to the outer sleeve, a locking clamping mechanism attached to the outer sleeve (7), and grip the telescopic sleeve (11), and is designed to lock the telescopic sleeve to the outer sleeve when the telescopic sleeve is in a selected position relative to the outer sleeve, an axle (10) located inside the telescopic sleeve (11) and is rotatable in relation to this.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*