



(51) International Patent Classification:
C07C 5/10 (2006.01)

(21) International Application Number:
PCT/US2011/036211

(22) International Filing Date:
12 May 2011 (12.05.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/395,601 14 May 2010 (14.05.2010) US

(71) Applicant (for all designated States except US):
**EXXONMOBIL RESEARCH AND ENGINEERING
COMPANY** [US/US]; 1545 Route 22 East, P.O. Box
900, Annandale, NJ 08801-0900 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SHIH, Stuart, S.** [US/
US]; 8204 Kerfoot Drive, Gainesville, VA 20155 (US).

(74) Agents: **PURWIN, Paul, E.** et al.; Exxonmobil Research
And Engineering Company, 1545 Route 22 East, P.O.
Box 900, Annandale, NJ 08801-0900 (US).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: METHOD FOR MAKING DIESEL WITH LOW POLYAROMATIC CONTENT

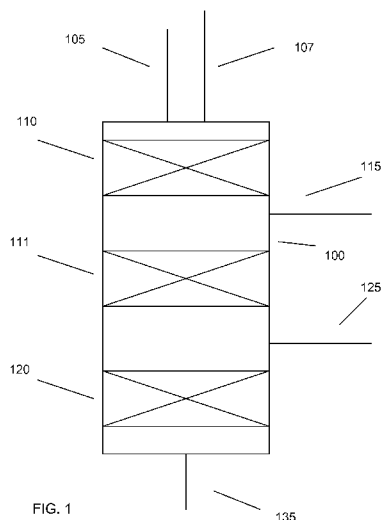

(57) Abstract: Distillate feeds are hydroprocessed to produce a product having a low content of polyaromatic hydrocarbons (PAHs). The hydroprocessing includes dewaxing and aromatic saturation of the feed. The temperature of the aromatic saturation process can be controlled to make a distillate product having a desired aromatic content, such as less the 0.02 wt% of polyaromatic hydrocarbons having three or more aromatic rings.