DIGITAL VCR WITH TRICK PLAY IMAGE CONTROL

This invention relates to the field of digital video recording, and in particular to reproduction of an high definition video signal at a non-standard speed.

BACKGROUND OF THE INVENTION

A digital video cassette recorder employing a helical scanning format has been proposed by a standardization committee. The proposed standard specifies digital recording of either standard definition (SD) television signals, for example NTSC or PAL, and high definition television signals having an MPEG compatible structure, such as a proposed Grand Alliance signal. The SD recorder utilizes a compressed component video signal format employing intra field/frame DCT with adaptive quantization and variable length coding. The SD track format comprises 10 μm tracks, azimuth recorded without guard bands, with 10 or 12 tracks per NTSC or PAL frame respectively. The tape cassette employs 1/4" wide tape with an evaporated metal recording medium. The SD digital VCR or DVCR, is intended for consumer use and has sufficient data recording capability to record either NTSC (PAL) signals, or an advanced television signal.

An advanced television or ATV signal has been developed by the Grand Alliance (GA) consortium. A specification document titled Grand Alliance HDTV System Specification was published in the 1994 Proceeding of the 48th Annual Broadcast Engineering Conference Proceedings. The GA signal employs an MPEG compatible coding method which utilizes an intra-frame coded picture, termed I frame, a forward predicted frame, termed a P frame and a bidirectionally predicted frame, termed a B frame. These three types of frames occur in a group known as a GOP or Group Of Pictures. The number of frames in a GOP is user definable but may comprise, for example, 15 frames. Each GOP contains one I frame, which is abutted by B frames, which are then interleaved with P frames.

CONFIRMATION COPY

In an analog consumer VCR, "Trick Play" or TP features such as picture in forward or reverse shuttle, fast or slow motion, are readily achievable, since each recorded track typically contains one field. Hence reproduction at speeds other than standard, result in the reproducing head, or heads, crossing multiple tracks, and recovering recognizable horizontal picture segments. The GOP of an ATV signal, employing I, P and B frames, may be recorded occupying multiple tracks on tape, for example, 10 tracks per frame and 150 tracks per GOP. Simply stated, when a DVCR is operated at a non-standard reproduction speed, replay heads transduce sections or segments from multiple tracks. Unfortunately these track segments no longer represent sections from discrete records of consecutive image fields. Instead, the segments contain data resulting mainly from predicted frames of the GOP. During play speed operation, I frame data is recovered which permits the reconstruction of the predicted B and P frames. Clearly, during "Trick Play" operation, the amount of I frame data recovered progressively diminishes as TP speed increases. Hence, the possibility of reconstructing B and P frames from the reproduced pieces of I frame data is virtually zero. Thus, the provision of "Trick Play" or non-standard speed replay features requires that specific data be recorded, which when reproduced in a TP mode, is capable of image reconstruction without the use of adjacent frame information. Furthermore, since "Trick Play" specific data is recorded, the physical track location must be such to permit recovery in a TP mode.

SUMMARY OF THE INVENTION

In accordance with an inventive arrangement a digital video recorder for reproducing digital image signals at different reproducing speeds, said recorder comprises: a transducer for recovering a digital signal from a recorded medium, the digital signal having a first data signal representing the digital image signals and a second data signal representing a processed form of the digital image signals; means coupled to the transducer for

separating the digital signal into the first and the second data signals; means responsive to a selection of one of the selected reproducing speeds and at least one of the first and second data signals for generating an image source control signal; and, selecting means coupled to the separating means and responsive to the control signal for selecting between the first and second data signals as output image sources.

In accordance with another inventive arrangement a digital video recorder employing a helical scanning format for reproducing a digital image signal, the recorder comprises: a play back transducer for transducing a digital signal from a recorded medium, the digital signal having a first data signal, having a compatible MPEG format and representing the digital image signal and a second data signal having a compatible MPEG format and representing a processed form of the digital image signal; means coupled to the transducer for separating the digital signal into the first and the second data signals; selecting means coupled to the separating means and responsive to a control signal for selecting the second data signal at initiation of reproduction and selecting the first data signal following reproduction of an I frame identifying signal from the first data signal; and, decoding means coupled to an output of the selecting means for generating the digital image signal from the first and the second data signals.

BRIEF DESCRIPTION OF THE DRAWING

FIGURE 1 illustrates a recorded track pattern showing the locations of various data sectors as specified for a standard definition DVCR.

FIGURE 2 illustrates the replay head path with areas of sync block recovery at twice replay speed.

FIGURE 3 illustrates the replay head path with areas of sync block recovery at four times replay speed.

FIGURE 4 illustrates the replay head path with areas of sync block recovery at eight times replay speed.

FIGURE 5 illustrates the replay head path with areas of sync block recovery at sixteen times replay speed.

FIGURE 6 contains tables showing audio and video sync-blocks recovered at various trick mode replay speeds.

FIGURE 7A illustrates sync-blocks recovered at 2, 4, 8 and 16 times replay speeds.

FIGURE 7B illustrates recovered sync-blocks common to 2, 4, 8 and 16 times replay speeds.

FIGURE 8 illustrates a first embodiment of a recorded track pattern showing advantageous sync block locations for placement of inventive "Trick Play" data.

FIGURE 9 illustrates the replay head path and track areas of sync block recovery at 3 times play speed.

FIGURE 10 illustrates the replay head path and track areas of sync block recovery at 9 times play speed.

FIGURE 11 illustrates the replay head path and track areas of sync block recovery at 19 times play speed.

FIGURE 12 illustrates the replay head path and track areas of sync block recovery at minus 1 times play speed.

FIGURE 13 illustrates the replay head path and track areas of sync block recovery at minus 7 times play speed.

FIGURE 14 illustrates the replay head path and track areas of sync block recovery at minus 17 times play speed.

FIGURE 15 illustrates sync-blocks recovered at 3, 9 and 19 times forward play speeds and 1, 7 and 17 times play speed in the reverse direction.

FIGURE 16 illustrates a second embodiment of a recorded track pattern showing inventive sync block locations for recording inventive "Trick Play" data.

FIGURE 17 illustrates a video data sector recorded with an ATV signal and an inventive "Trick Play" signal.

FIGURE 18A illustrates the arrangement of data within a SD sync block. FIGURE 18B illustrates a sync block

advantageously formatted for recording both ATV and inventive "Trick Play" data signals.

FIGURE 19 is a system block diagram of an ATV digital video cassette recorder employing an inventive "Trick Play" recording and replay features.

FIGURE 20 is a system block diagram of an inventive "Trick Play" encoder and decoder.

FIGURE 21 is a system block diagram showing an SD recorder and inventive control of "Trick Play" and high definition video playback.

DETAILED DESCRIPTION

FIGURE 1 shows a recorded track format for a consumer use, standard definition (SD), helical scan, digital video cassette recorder. The effective data area shown in FIGURE 1 comprises four sectors in which specific types of data are recorded. The ITI, or Insert and Track Information data sector is used for tracking and editing, and is followed by an editing gap G1. An audio data sector occupies 14 sync blocks, numbered 0 - 13. A second editing gap G2, follows the audio data sector, which is followed by a video data sector comprising 149 sync blocks, numbered 0 - 148. A third editing gap G3 follows the video data sector which is in turn followed by a sub code recording sector. The digital video cassette recorder or DVCR, is specified to have a digital video recording rate of 24.948 Mbps. This video bit rate may be utilized for recording a component video signal decoded from either an NTSC (PAL) signal, or a processed advanced television signal, such as for example, the GA signal. FIGURE 21 shows, a simplified block diagram of a DVCR 350. DVCR 350 comprises a head drum 510 which includes a plurality of recording and reproducing heads which are coupled to a playback processor that generates four output signals, 351, 352, 353 and 354. Replay signal 354 represents an ATV data stream and the data processing path is depicted by blocks 359, 120 and 130. "Trick Play" image data is represented by replay signal 353 which

is shown coupled to subsequent "Trick Play" image data processing. The processing and selection between "Trick Play" and ATV images will be described later. A cassette 501, is shown inserted into DVCR 350, with tape 504 threaded around the head drum 510.

The SD track format may be recorded with various head placements on the drum or cylinder, and with various drum rotational speeds. The track patterns which follow illustrate replay head paths or tracks for various "Trick Play" speeds. In addition, two possible head drum configurations are illustrated, i.e. a double azimuth head pair, and two single heads 180° diametrically opposed on the drum.

FIGURES 2 - 5 illustrate replay head paths for a selection of "Trick Play" reproduction speeds. The tape is recorded according to the SD, digital video cassette recorder format, with 10 μm tracks, azimuth recorded without guard bands, and is illustrated replayed by a replay head with pole face width of 15 μm.

FIGURE 2 illustrates the replay head path or footprint, at twice speed reproduction. The footprint shown is for a single pair of double azimuth replay heads. It is assumed that the replay head will recover sync block data from the recorded track until half the recorded track width is scanned. The FIGURES depict track areas of sync block data recovery by cross hatching.

FIGURES 3, 4 and 5 illustrates the replay footprints at four, eight and sixteen times play speed respectively.

FIGURE 6A is a table showing track numbers and the numbered sync blocks recovered from the audio data sector at the TP speeds illustrated in FIGURES 2 - 5. FIGURE 6B shows the tracks, and numbered sync blocks, recovered from the video data sector at the Trick Play speeds illustrated.

The recovered video sync block data depicted by cross hatching in FIGURES 2, 3, 4 and 5, and the numbered sync blocks, of table FIGURE 6B, are combined and illustrated in FIGURE 7A for

TP speeds of 2, 4, 8 and 16 times. FIGURE 7B illustrates track areas and numbered sync blocks recovered, which are common to all four speeds. Thus FIGURE 7B indicates track locations, identified by sync block number, where data may be recorded and recovered at play speed and at 2, 4, 8 and 16 times play speed.

FIGURE 8 shows one recorded track comprising an ITI, or Insert and Track Information recording area, editing gap G1, an audio data recording area occupying 14 sync blocks, numbers 0 - 13. During ATV operation audio and video data are conveyed within the ATV data transport stream thus the audio data sector is not required for audio data use and may be utilized for ATV and "Trick Play" data recording. A second editing gap G2, follows the audio data sector and it is followed by a video data recording sector comprising 149 sync blocks, numbered 1 - 149. A third editing gap G3 follows the video data sector which is in turn followed by a sub code recording area. The recorded track of FIGURE 8 shows an advantageous first embodiment of sync block allocation for inventive TP data recording, where 5 sync blocks are used in the audio sector, and 40 sync blocks are utilized in the video sector. Thus 45 sync blocks may be utilized in each scan to record TP video data for recovery at both standard and non-standard play speeds. These 45 TP sync blocks provide an effective replay data rate of about 1.06 Mbit/sec at nominal speed.

FIGURES 9 - 11 illustrate replay head paths for "Trick Play" speeds of 3 times, 9 times and 19 times, with head footprints for both double azimuth and 180° diametrically opposed heads.

FIGURE 9 illustrates track areas of sync block recovery at 3 times play speed. Tracks T1 and T2 represent reproduction with double azimuth head pair, tracks T1 and T4 represent reproduction by 180° opposed heads. FIGURE 9 shows that for either type of replay head configuration there are areas of the track, and consequently sync blocks, which are never recovered.

FIGURE 10 illustrates track areas of sync block recovery at 9 times play speed. Tracks T1 and T2 represent reproduction with double azimuth head pair, tracks T1 and T10 represent reproduction by 180° opposed heads.

FIGURE 11 illustrates track areas of sync block recovery at 19 times play speed. Tracks T1 and T2 represent reproduction with double azimuth head pair, tracks T1 and T20 represent reproduction by 180° opposed heads.

FIGURE 12 illustrates track areas of sync block recovery at minus 1 times play speed. Tracks T3 and T4 represent reproduction with double azimuth head pair, tracks T3 and T2 represent reproduction by 180° opposed heads.

FIGURE 13 illustrates track areas of sync block recovery at minus 7 times play speed. Tracks T17 and T18 represent reproduction with double azimuth head pair, tracks T17 and T10 represent reproduction by 180° opposed heads.

FIGURE 14 illustrates track areas of sync block recovery at minus 17 times play speed. Tracks T21 and T22 represent reproduction with double azimuth head pair, tracks T21 and T4 represent reproduction by 180° opposed heads.

The sync blocks recovered at the various forward and reverse speeds shown in FIGURES 9 - 14, are combined and illustrated as single tracks. FIGURE 15A, illustrates numbered sync blocks at 3 times speed, FIGURE 15B, shows SBs recovered at 9 times speed, FIGURE 15C, for 19 times speed, FIGURE 15D, for minus 1 times speed, FIGURE 15E, for minus 7 times speed, and FIGURE 15F, for minus 17 times speed. FIGURE 15G represents analysis of the recovered sync blocks for commonalty. Thus FIGURE 15G shows numbered sync blocks which are recovered at 3, 9 and 19 times in the forward direction and 1, 7 and 19 in reverse directions.

FIGURE 16 illustrates a second embodiment having advantageous track locations, identified by sync block number, where 45 sync blocks of inventive "Trick play" video data may be

recorded and recovered at play speed and at play speeds of 3, 9 and 19 times in the forward direction and 1, 7 and 17 times in the reverse direction.

An ATV bit stream may be recorded in the data capacity of 105 sync blocks, which are composed of 14 sync blocks from the audio data sector and 91 SB from the video data sector. The inventive "Trick Play" video data may be recorded using 45 SB within the video data sector. In FIGURE 17, a video data sector is illustrated showing sync block (SB) structure for an ATV data recording.

FIGURES 18 A and B illustrate the data structure of a sync block, SB, within the video data sector. FIGURE 18A illustrates a standard definition or SD formatted sync block. The SD sync block comprises 90 bytes, with 77 bytes containing 6 groups of discrete cosine transformed or DCT coefficient data. Each DCT group comprises a DC coefficient value followed by AC coefficient values in descending order of significance. FIGURE 18B illustrates a sync block formatted with inventive "Trick Play" data. "Trick Play" data is compressed, discrete cosine transformed and variable length coded, as will be described for FIGURE 20. Two compressed TP macro blocks may be recorded in one sync block, formatted as shown in FIGURE 18B.

Having identified sync block locations advantageous to "Trick Play" reproduction in both forward and reverse directions at various speeds, "Trick Play" video data must be derived from the ATV data stream. As described earlier, TP sync blocks recovered during "Trick Play" mode replay, must be capable of decoding to produce images without reference to, or prediction from, adjacent image frames. Clearly "Trick Play" video data may be derived from intraframe or I frame coded video. However, derivation of "Trick Play" video exclusively from I frames may, as a consequence of the low repetition rate of I frames within each GOP, result in stroboscopic or jerky rendition of motion in "Trick Play" modes. Thus, to avoid jerky "Trick Play" motion, video for "Trick

Play" record processing is advantageously derived from video, decoded from the ATV or MPEG like data stream. Hence every decoded picture, derived from I, P or B frames, is processed to generate corresponding "Trick Play" frames for recording. Thus each recorded frame in a GOP contains a corresponding "Trick Play" processed image which, during "Trick Play" reproduction, may be decoded to provide images in which motion is smoothly portrayed

The DVCR format allocates ten recorded tracks to one ATV frame, thus the same number of recorded tracks is selected for the "Trick Play" video data. The ATV data may be allocated 105 SB per track, thus a recorded ATV frame corresponds to 1050 SBs. Since "Trick Play" video data may be allocated 45 sync blocks per video sector, a total of 450 SBs are utilizable for "Trick Play" data recording. Hence each "Trick Play" video frame must be compressed to occupy the data capacity provided by the 450 sync blocks. The required degree of the "Trick Play" video data compression may be represented by 450:1050 or approximately 2.3 to 1.

FIGURE 19 is a block diagram of an advanced television receiver employing an inventive method of Trick Play mode processing for recording an MPEG like data stream on a standard definition or SD, digital video cassette recorder. The block diagram comprises an ATV decoder 100, a Trick Play processor 200, and an SD DVCR 300. An exemplary RF modulated advanced television signal is received by an antenna 101, and is coupled to an input of an ATV decoder 100. The RF modulated signal may also be delivered to decoder 100 via a cable distribution system. Decoder 100 comprises a channel demodulator 110, which extracts the modulated, MPEG like, ATV bit stream signal from the RF carrier. The bit stream has a data rate of 19.3 Mbs, and is coupled as output signals 111 and 112. Bit stream 111 is coupled to a transport packetization decoder 120, which in simple terms, separates video data packets 121, from audio data packets 122. The video data packets 121 are coupled to a video compression decoder 130 which

reconstructs HD video image signals. The video signals 131, are coupled to a video processor and sync generator 150, which generates at output 151, the original 16:9 aspect ratio high definition video signals, for example, luminance and color difference signals Cr and Cb. The video processor and sync generator 150, also receives a second input signal 132 from pixel converter 280, of the Trick Play processor 200. The audio data packets 122 are coupled to an audio compression decoder 140 which extracts and regenerates the original audio signals which form audio output signals 141.

The MPEG like bit stream signal 112, is coupled to a bit stream rate converter 310, which converts the 19.3 Mbs bit stream to a data rate of 24.945 Mbs, as required for processing and recording by the SD recorder. The output from rate converter 310 is coupled to an inner and outer parity generator 320 which generates Reed Solomon error correction codes which are included in the video data recorded in the video sector, as depicted in FIGURE 1. Following the insertion of RS error correction codes the data stream is coupled to an SD video data sync block structurer 330, which constructs video data-sync block structure required by the SD recorder format.

Block 340 of FIGURE 19, constructs audio and video sectors according to the SD format, where video data sector includes processed ATV data from block 330, plus inventive "Trick Play" video data 251, from block 250 of "Trick Play" video processor 200.

The SD video sector format or structure, is illustrated in FIGURES 17, 18A and 18B. FIGURES 18A and 18B show the sector comprises a video preamble, 149 sync blocks of video data and error correction code, and a video post-amble. The sync blocks are numbered 1 through 149. FIGURE 18A depicts an SD format employed during the recording of an NTSC image source. FIGURE 18B shows ATV video data advantageously recorded occupying, for example, 105 sync blocks. Inventive "Trick Play"

video data may be recorded occupying, for example, 45 sync blocks and video auxiliary data may be recorded with 2 sync blocks. Outer parity error correction data is recorded using 11 sync blocks.

The ATV video sector data, including "Trick Play" data and audio sector signals are coupled from block 340 to a standard definition or SD digital video cassette recorder 350. The SD recorder may also receive an analog NTSC (PAL) input signal for recording. The analog signal is decoded into luminance and color difference components and, for NTSC input signals, the components are 4:1:1 sampled at 13.5 MHz and digitized to 8 bits. The digitized NTSC signal is compressed according to the SD recording format which employs intra-field/frame DCT applied to 8 X 8 image blocks, followed by adaptive quantization and modified two dimensional Huffman encoding. The image blocks are shuffled, or redistributed, throughout each frame to prevent recording media damage producing uncorrectable data errors. Since the image blocks are shuffled prior to recording, any large media related reproduction errors will be distributed throughout the decoded frame as a result of complementary deshuffling employed during reproduction. Thus large potentially uncorrectable, and therefor visible errors, are distributed and may be correctable by the inner and outer Reed Solomon error correction codes. Following compression, the data is coded for recording using a 24:25 transformation which allows frequency response shaping to provide auto tracking capabilities on replay.

The SD recorder 350 reproduces four output signals, 351, 352, 353 and 354. Output signals, 351 and 352 are base band analog signals comprising, video components Y, Cr and Cb, and audio signals respectively. Signal 351 comprises video components which are coupled to an NTSC sync generator and encoder 360, which provides blanking and sync pulse addition for video monitor viewing. The components may be encoded to

produce an NTSC signal for viewing on a standard definition TV receiver.

SD recorder 350 generates an ATV data bit stream output signal 354, and a "Trick Play " data bit stream output signal 353. Signal 353 is coupled via error correcting block 259 to block 260 of the ATV and "Trick Play" processor 200 for decompression and subsequent up conversion to an ATV signal format. The operation of "Trick Play" processor 200 will be described with reference to FIGURE 20.

Data bit stream 354, is coupled via error correcting block 359 to block 120 of ATV decoder 100, where the replayed transport packets are decoded. A decoded ATV signal 131, is coupled from the video compression decoder 130, to line rate converter 210, of the ATV and "Trick Play" processor 200. The ATV signal comprises luminance and color difference signals, Cr and Cb, and may for example, comprise 1080 active horizontal scan lines each having 1920 pixels or samples. Line rate converter 210, reduces the number of active scan lines to one third, or 360 lines. Thus the luminance and color difference signals which are processed to form a "Trick Play" video signal having one third of the vertical resolution of the original ATV signal. The line number conversion is performed by a vertical low pass filter function. The line rate reduced signal from converter 210 is coupled to a pixel converter 220 which reduces the number of pixels to one third by low pass filtering. Thus, signal 221 comprises 360 horizontal lines each containing 640 pixels, and ATV signal 131, has been transformed, or down converted, into a signal having "NTSC" like parameters. Since the ATV signal had an aspect ratio of 16:9, so to will signal 131. However, the down converted signal 221 will display the 16:9 image in a letter box format.

The down converted signal 221 is also coupled to NTSC encoder 360 for sync and blanking addition and encoding for standard definition viewing on a receiver or video monitor. Signal

221 is also coupled to a signal compression processor represented by block 230, the details of which will be described with respect to FIGURE 20. However, in simple terms, the purpose of signal compression processor 230 is to generate a compressed form of the down converted ATV signal. For example, signal compression processor 230, may compress signal 221 by approximately 2.3 times.

The compressed, down converted signal is utilized to provide "Trick Play" video data for recording at specific sync blocks within each track, for example, as shown in FIGURES 8 and 16. Data for each TP video frame is recorded within the ten tracks which comprise each ATV SD recorded frame. Thus TP video data may be considered to be redundantly recorded within the video data sectors of the tracks comprising an ATV SD frame. During normal speed playback, TP video data is reproduced together with the ATV data but may not be used in the formation of an ATV image. However, since a "Trick Play" data frame occurs in every ten recorded tracks, these TP frames may be recovered during normal playback and may be stored and utilized use during a replay mode transition. For example, a transition from normal speed forward playback to high speed "Trick Play" or picture in shuttle. In a worst case situation, when a normal speed replay is initiated, approximately 140 recorded tracks may be reproduced before an I frame is recovered. However, since TP data frames are advantageously recorded in I, P and B frames, "Trick Play" processed images may be produced immediately following the reproduction of any frame type. Thus a "Trick Play" processed image may be output during the initiation of a normal speed replay prior to I frame decoding. Upon I frame acquisition the output may be switched from "Trick Play" to ATV images.

The compressed TP signal from block 230 is coupled to an inner parity generator 240, which adds Reed Soloman error correcting data to the TP data stream. The TP video data, with RS inner parity added, is coupled to a TP video data sync block

formatter 250, which generates only the specific numbered sync blocks required for "Trick Play" reproduction at specific speeds. For example, "Trick Play" reproduction at various speeds is possible with sync blocks allocated as shown in the embodiments of FIGURES 8 or 16. These TP video data sync blocks are output as signal 251 which is coupled to the video and audio sector constructor 340 of SD DVCR 300.

During playback SD recorder 350 reproduces "Trick Play" data signal 353, which coupled to an error correcting processor 259. Following error correction the TP data stream is coupled for signal decompression in processing block 260 of the ATV and "Trick Play " processor 200. The details operation of block 260 will be described with respect to FIGURE 20. However, in simple terms, decompressor 260 is utilized to regenerate down converted ATV images from the compressed TP data recovered from the recording medium.

An inventive "Trick Play" signal compression processor, for generating data signal 251, is shown in blocks 234 - 238 of FIGURE 20. Replayed TP data may be decompressed by blocks 262 - 266 of FIGURE 20. Rate reduced ATV signal 221, is coupled to formatter 234, which converts the scan line format of signal 221 into a two dimensional macro block or MB, structure comprising 4 DCT blocks. Thus a macro block has the dimensions of 32 pixels by 8 lines. The macro block formatted, rate reduced signal, is coupled to block 235 for discrete cosine transformation. The principals of the discrete cosine transform are well known, with a data rate reduction ensuing from the control of coefficient quantization. DCT block 235, produces two output signals which represent the amplitude value of the frequency coefficients that comprise each macro block. One output signal is coupled to block 236 which pre-analyzes the amplitudes of the coefficients and controls the coarseness or fineness of quantization by quantizer block 237. The second output from DCT block 235 is coupled to quantizer block 237 for quantization, where the number of

quantizing steps is dynamically controlled responsive to block 236. The quantized DCT coefficients are coupled to block 238 for variable length encoding. Various methods of variable length coding or VLC are known. However, in simplistic terms, the most frequently occurring quantized coefficient values are assigned correspondingly short code words with less frequent coefficient values being encoded with code words of progressively increasing length. Thus the overall data rate of TP video data is further reduced such that a "Trick Play" frame of data may be recorded in 450 sync blocks provided in 10 recorded tracks.

The variably length coded TP data is coupled to block 240 for generation and addition of a Reed-Soloman inner parity error correction code. The TP data with RS inner parity error correction is coupled to block 250 for formatting to have a specific SD sync block structure, for example, as identified in FIGURES 8 and 16. The TP data having the required sync block structure is coupled to the SD recorder as already described for "Trick Play" processor block 200.

During replay modes, the reproduced TP data stream signal 353, is coupled via error correction in block 259, to decompression block 260 which reverses the signal processing performed by block 230. The VLC TP data signal 353 is input to block 266 which performs variable length decoding. Various methods of decoding are well known, for example, a look up table could be used to convert VLC data words back into quantized DCT coefficients of constant length. From block 266 the TP DCT coefficients are coupled to an inverse quantizer 262, which may be considered to perform digital to analog conversion of the TP DCT coefficients. The TP DCT coefficients are coupled to block 263 which applies an inverse discrete cosine transformation which produces a macro block formatted output signal representing the TP image. The macro block sampled TP signal is reformatted in block 264 to produce a conventional line structured image. The output signal from the reformatter 264 is processed in block 265

which, for example, may provide blanking insertion and sync pulse addition. Signal 261 is output from block 265 and may be coupled for viewing on a component video monitor, or may be encoded for TV viewing. A second output signal 271, from block 264 is coupled to blocks 270 and 280 which provide up conversion from the nominally "NTSC" like line and pixel formats to line rates and horizontal pixel counts required for high definition display viewing.

The up converted TP video signal 131 is coupled as a second input to video processor and sync generator 150, which generates a high definition output signal 151. Video processor and sync generator 150 provides video blanking and the addition of HDTV sync waveforms. However, in addition video processor 150 provides a selecting function for switching between ATV and "Trick Play" video images. FIGURE 21 shows, in block diagram form, the replay data paths for ATV data stream 354 and "Trick Play" data stream 353, and their coupling for output selection in video processor and sync generator 150. The selection of output image source is ultimately responsive to user initiated control command communicated via a control system. For example, a Play command will start the VCR mechanism and switch the electronic system from an EE mode, (electronics to electronics) to a replay condition. However, the actual instant of output signal switching may be determined by various other controlling factors. For example, the most significant controlling event may be the acquisition and decoding of an I frame from a recorded GOP. This occurrence may be signaled by decoder 130 and coupled to control the video output selector switch within the video processor and sync generator 150.

As described earlier, a 15 frame GOP will occupy 150 recorded tracks, thus when initiating play mode, a replayed video image may be delayed until an I frame has been reproduced and decoded, i.e. up to 140 tracks may need to be reproduced until an I frame is encountered. However, since TP data is advantageously

recorded within each frame of a GOP, and is reproduced in a normal play mode, TP data may be utilized to generate an output video signal without waiting for an I frame occurrence. Thus the redundant nature of TP data recording may advantageously provide normal speed images, derived from TP data, at the initiation of normal playback, with ATV images being selected when available, following I frame acquisition.

When a user initiates a command starting or terminating a "Trick Play" mode, the control system, and in particular the video processor and sync generator 150, may be advantageously controlled to present the user with a more aesthetically pleasing image transition. For example, as already described, at the initiation of normal speed playback "Trick Play" images may be output, prior to the acquisition and decoding of an I frame. A further use of TP video data may be during the transition to a "Trick Play" reproducing speed, where TP video data which was recovered and stored during normal playback may used together with TP data transduced during a replay speed transition. Such a use of TP data provides an alternative to sustaining the last ATV frame until TP video data is available at the selected TP speed.

When transitioning from a "Trick Play" mode to normal play, the ATV signal 131 will become available for display processing only after the occurrence an I frame in the replayed ATV signal GOP. This I frame occurrence depends on the re-synchronization rate of the SD recorder capstan servo, and more significantly, where in the recorded GOP sequence normal play speed was re-acquired. Thus various options may be advantageously provided to produce a pleasing image transition between "Trick Play" and normal playback. For example, upon the command terminating "Trick Play" the last TP frame may be frozen and repeated from a memory until ATV signals are reproduced. This method may indicate to the user that the control command has been received and executed. However, a frozen or

still image juxtaposed with the fast moving images produced in TP, may appear incongruous to the user. A further option for transition from "Trick Play" may be provided by continuing to reproduce TP data and display TP images for the duration of servo resynchronization and ATV signal I frame acquisition. With this option, the redundant nature of the TP data may be exploited during the tape speed change, resulting from the servo resynchronization, and during the wait for an ATV I frame. During the tape speed change, despite the redundant nature of the TP data, some TP data may not be recovered, however such errors may be concealed by TP image frames repeated from a memory. This advantageous method provides the user with a visual indication that the VCR is responding to the command since the speed of the TP image will visibly change as the capstan slows to re-synchronize at play speed. This feature may also permit slower tape speed transitions to be used thus providing smoother and less potentially damaging tape handling since tape acceleration or deceleration will be accompanied by accelerating or decelerating "Trick Play" images.



CLAIMS

1. A digital video recorder for reproducing digital image signals at different reproducing speeds, said recorder comprising:

a transducer for recovering a digital signal from a recorded medium, said digital signal having a first data signal representing said digital image signals and a second data signal representing a processed form of said digital image signals;

means coupled to said transducer for separating said digital signal into said first and said second data signals;

means responsive to a selection of one of said selected reproducing speeds and at least one of said first and second data signals for generating an image source control signal; and,

selecting means coupled to said separating means and responsive to said control signal for selecting between said first and second data signals as output image sources.

2. The digital video recorder of claim 1, wherein said different reproducing speeds represent a first speed equal to a recording speed and a second speed different from said recording speed.

3. The digital video recorder of claim 2, wherein said first data signal is selected as an output image source for reproduction at said first speed.

4. The digital video recorder of claim 2, wherein said second data signal is selected as an output image source for reproduction at said second speed.

5. The digital video recorder of claim 2, wherein said selected reproducing speeds also includes initiating said first speed from a stopped recorder condition.



6. The digital video recorder of claim 5, wherein said second data signal is selected during a transition from said stopped recorder condition to operation at said first speed and said first data signal is selected during operation at said first speed.

7. The digital video recorder of claim 2, wherein said selected reproducing speeds represents changing from said first speed to said second speed and responsive thereto, said control signal controls said selecting means to select said second data signal.

8. The digital video recorder of claim 2, wherein said second data signal is selected during a transition from operation at said second speed to operation at said first speed and said first data signal is selected during operation at said first speed.

9. The digital video recorder of claim 5, wherein said control signal controls said selecting means to select a data signal representative of a still image responsive to initiating said first speed from a stopped recorder condition, and said first data signal is selected during operation at said first speed

10. The digital video recorder of claim 1, wherein said digital image signals have an MPEG compatible format.

11. The digital video recorder of claim 1, wherein said different reproducing speeds represent a first speed equal to a recording speed and a second speed in a reverse direction to said first speed.

12. The digital video recorder of claim 11, wherein said second data signal is selected as an output image source for reproduction at said second speed in said reverse direction.

13. The digital video recorder of claim 1, wherein said processed form of said digital image signals represents said digital image having reduced resolution.

14. The digital video recorder of claim 1, wherein said means responsive to a selection is additionally responsive to previously selected reproducing speed.

15. A digital video recorder employing a helical scanning format for reproducing a digital image signal, said recorder comprising:

a play back transducer for transducing a digital signal from a recorded medium, said digital signal having a first data signal, having a compatible MPEG format and representing said digital image signal and a second data signal having a compatible MPEG format and representing a processed form of said digital image signal;

means coupled to said transducer for separating said digital signal into said first and said second data signals;

selecting means coupled to said separating means and responsive to a control signal for selecting said second data signal at initiation of reproduction and selecting said first data signal following reproduction of an I frame identifying signal from said first data signal; and,

decoding means coupled to an output of said selecting means for generating said digital image signal from said first and said second data signals.

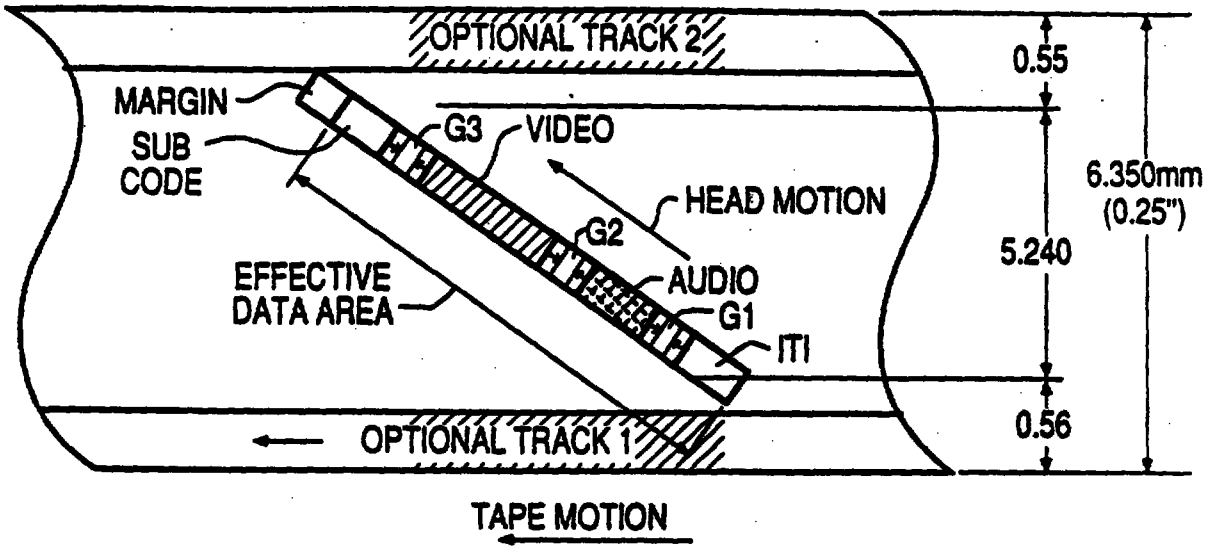

OPTIONAL TRACK 2
MARGIN
SUB CODE
G3
VIDEO
HEAD MOTION
G2
AUDIO
G1
ITI
EFFECTIVE DATA AREA
OPTIONAL TRACK 1
0.55
6.350mm (0.25")
5.240
0.56
TAPE MOTION

FIG. 1

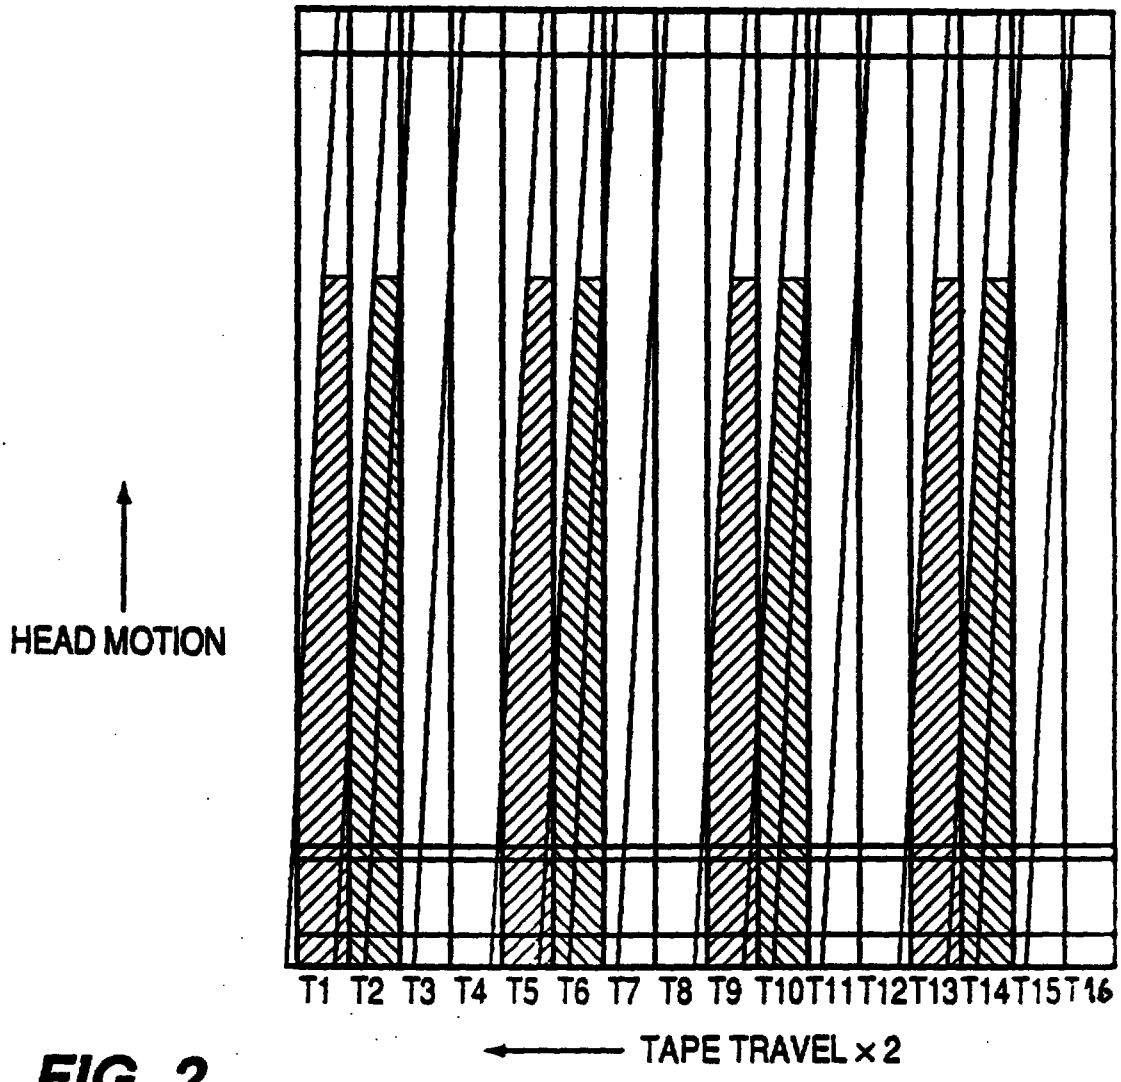

HEAD MOTION
T1 T2 T3 T4 T5 T6 T7 T8 T9 T10 T11 T12 T13 T14 T15 T16
TAPE TRAVEL × 2

FIG. 2

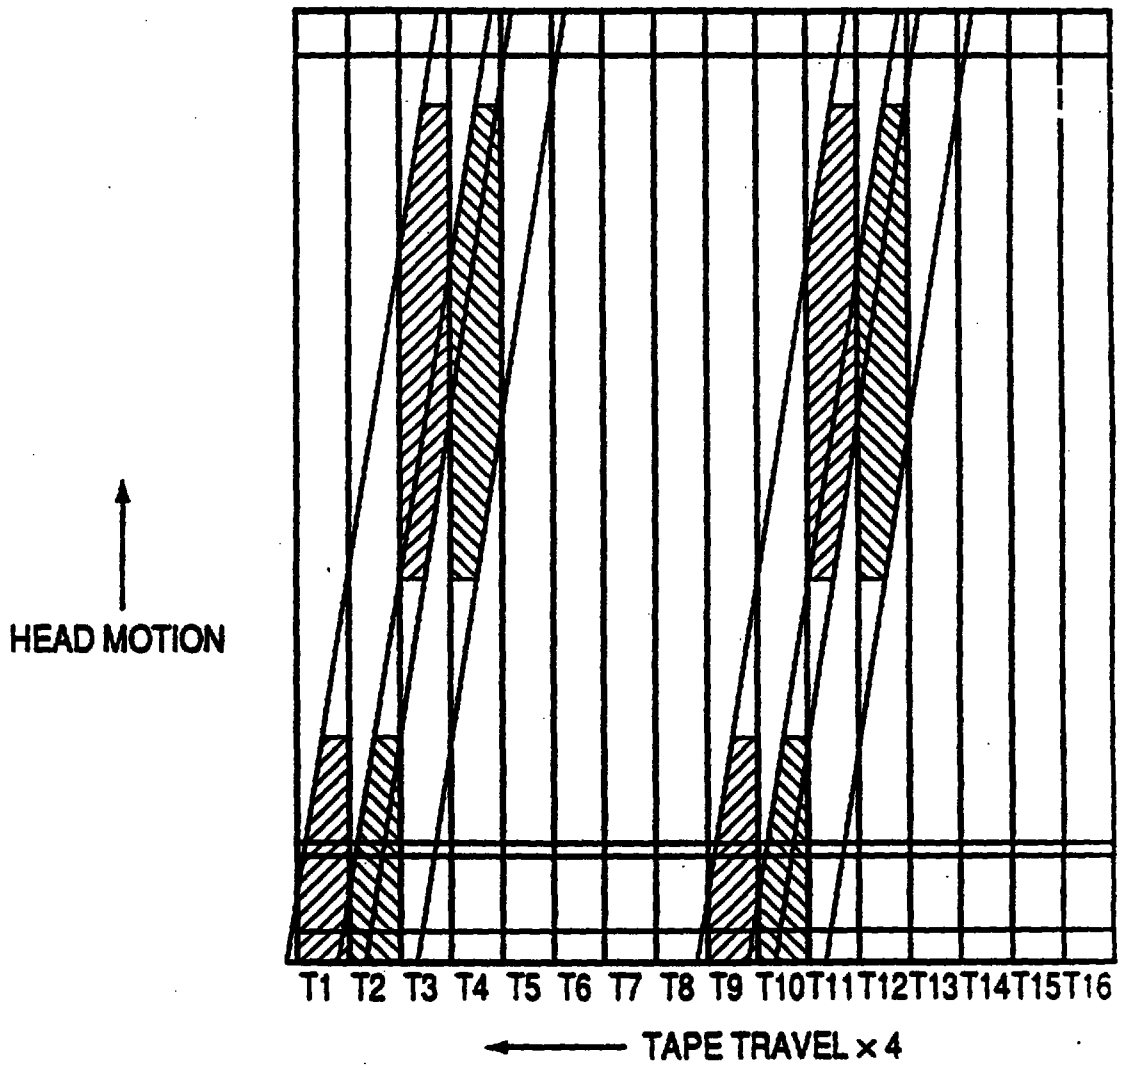

HEAD MOTION
T1 T2 T3 T4 T5 T6 T7 T8 T9 T10 T11 T12 T13 T14 T15 T16
TAPE TRAVEL × 4

FIG. 3

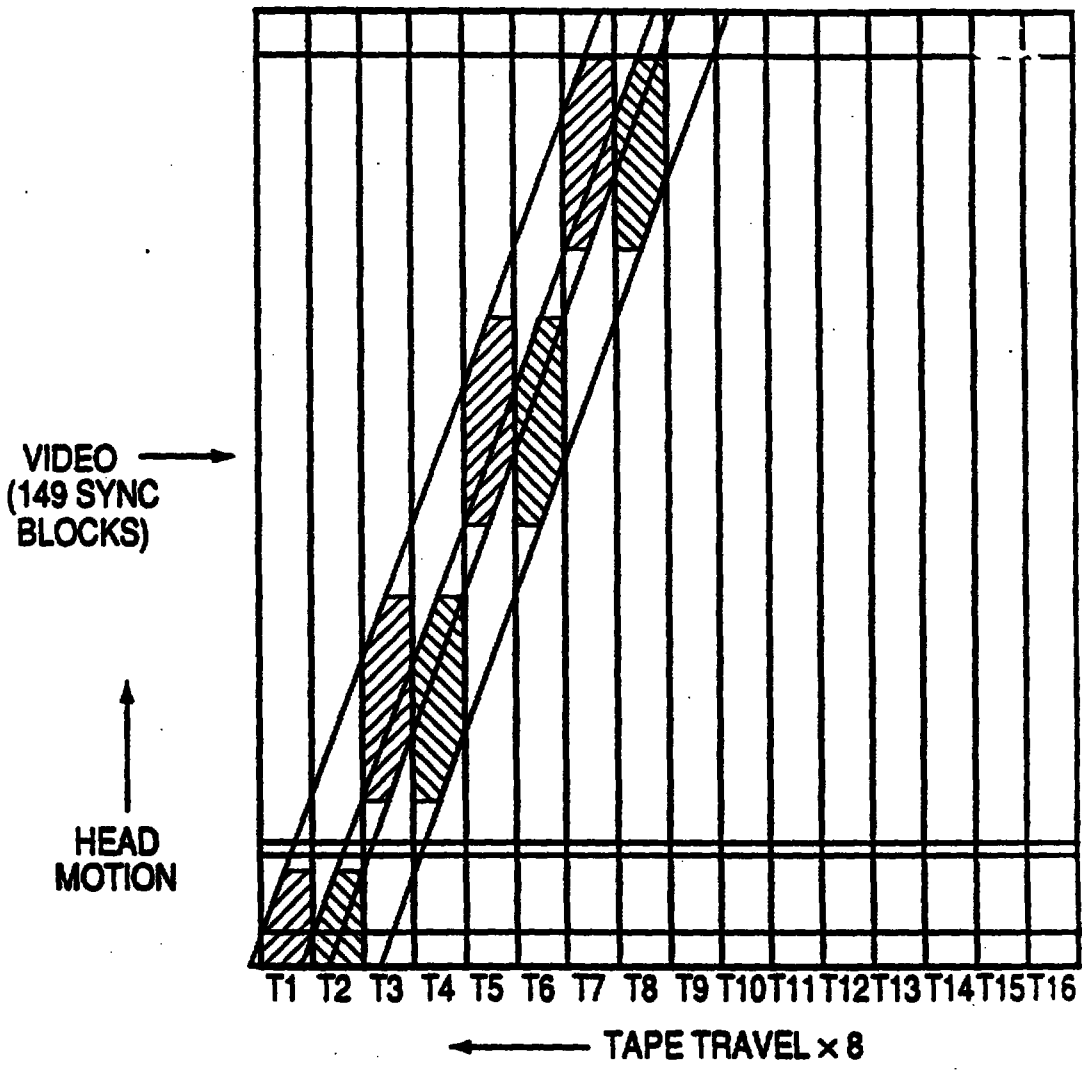

VIDEO
(149 SYNC
BLOCKS)
HEAD
MOTION
T1 T2 T3 T4 T5 T6 T7 T8 T9 T10 T11 T12 T13 T14 T15 T16
TAPE TRAVEL × 8

FIG. 4

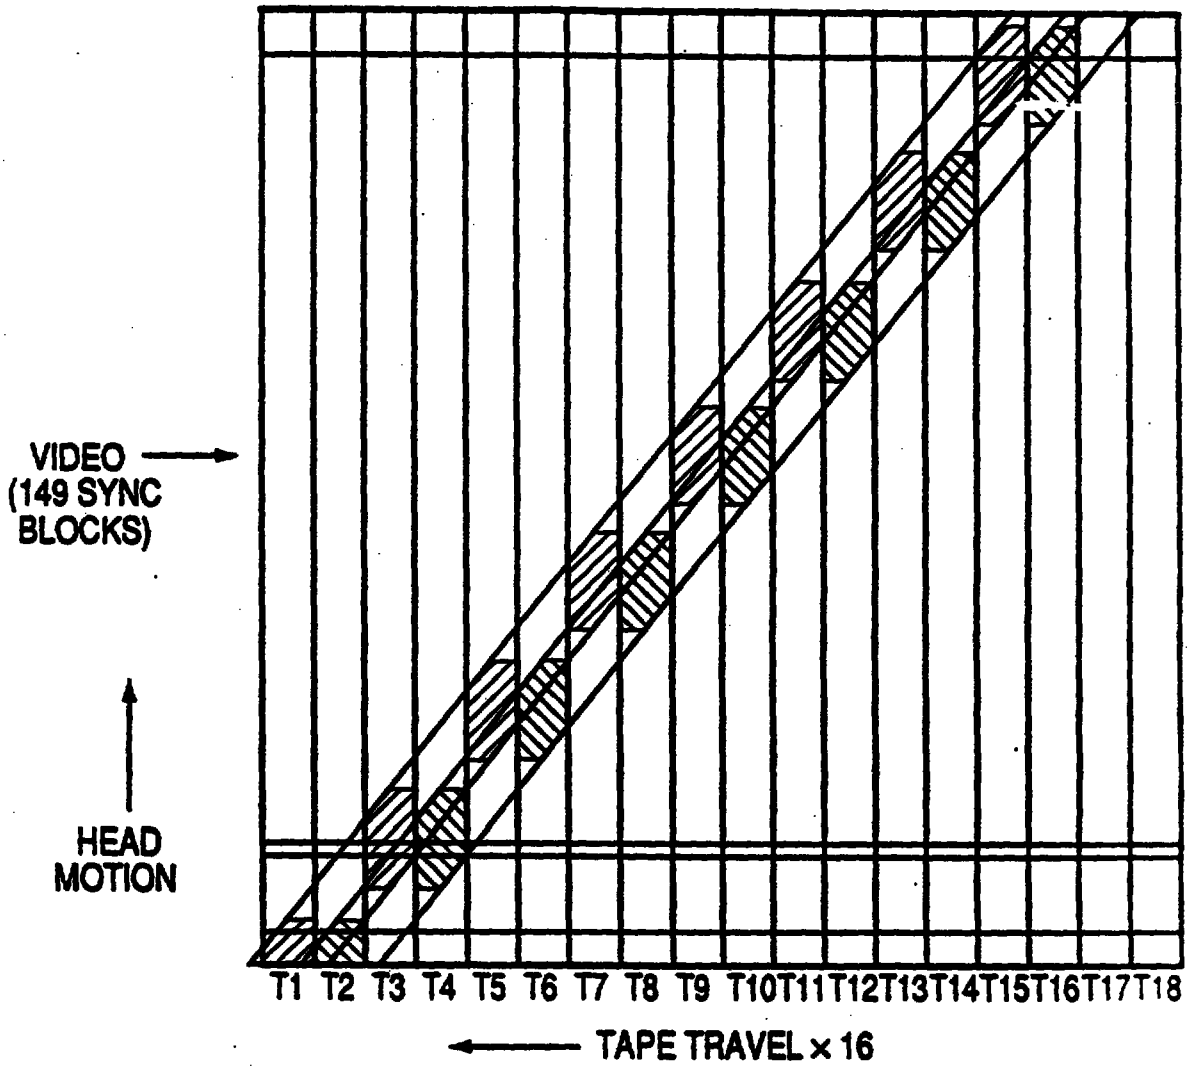

VIDEO
(149 SYNC
BLOCKS)
HEAD
MOTION
T1 T2 T3 T4 T5 T6 T7 T8 T9 T10T11T12T13T14T15T16T17T18
TAPE TRAVEL x 16

FIG. 5

AUDIO SECTOR

2 TIMES P.B. (0–13 SYNC. BLOCKS)	×	×			×	×			×	×			×	×			×	×			×	×			×	×			×	×
4 TIMES P.B. (0–13 SYNC. BLOCKS)	×	×							×	×							×	×							×	×				
8 TIMES P.B. (0–11 SYNC. BLOCKS)	×	×															×	×												
16 TIMES P.B. (0–1 SYNC. BLOCKS) (9–13 SYNC. BLOCKS)	×	×	×	×																										

FIG. 6A

VIDEO SECTOR

2 TIMES P.B. (0–13 SYNC. BLOCKS)	×	×			×	×			×	×			×	×			×	×			×	×			×	×			×	×
4 TIMES P.B. (0–21 SYNC. BLOCKS) (53–141 SYNC. BLOCKS)	×	×	×	×					×	×	×	×					×	×	×	×	×	×			×	×	×	×		
8 TIMES P.B. (10–46 SYNC. BLOCKS) (62–98 SYNC. BLOCKS) (113–145 SYNC. BLOCKS)			×	×	×	×	×	×											×	×	×	×	×	×						
16 TIMES P.B. (0–9 SYNC. BLOCKS) (17–33 SYNC. BLOCKS) (41–57 SYNC. BLOCKS) (81–65 SYNC. BLOCKS) (89–105 SYNC. BLOCKS) (113–129 SYNC. BLOCKS) (137–148 SYNC. BLOCKS)			×	×	×	×	×	×	×	×	×	×	×	×	×	×														

FIG. 6B

PCT/IB95/00229

FIG. 7A

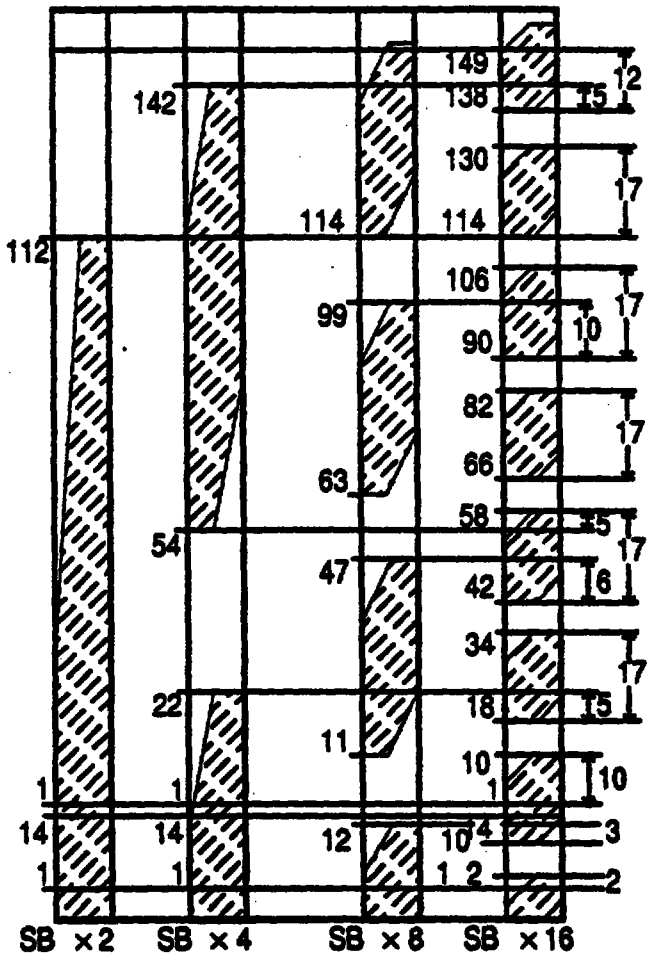
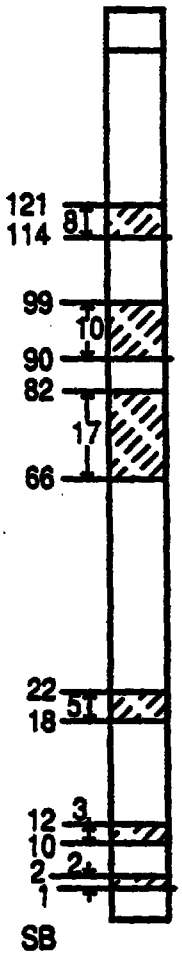

149
138
130
114
106
90
82
66
58
42
34
18
10
1
142
114
99
63
54
47
22
11
1
14
1
12
10
4
1 2
112
12
15
17
17
10
17
17
15
16
17
15
10
3
2
SB ×2
SB ×4
SB ×8
SB ×16

FIG. 7B


121
114
99
90
82
66
22
18
12
10
2
1
8
10
17
15
3
2
SB

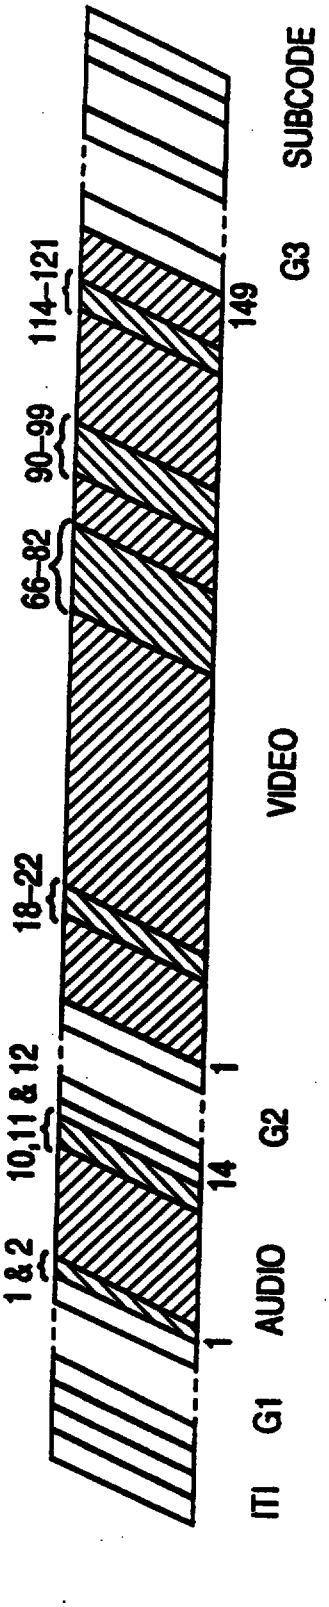

ITI
G1
AUDIO
1 & 2
10,11 & 12
1
14
G2
18–22
1
VIDEO
66–82
90–99
114–121
149
G3
SUBCODE
HEAD MOTION
TRICK PLAY DATA
ATV DATA

FIG. 8

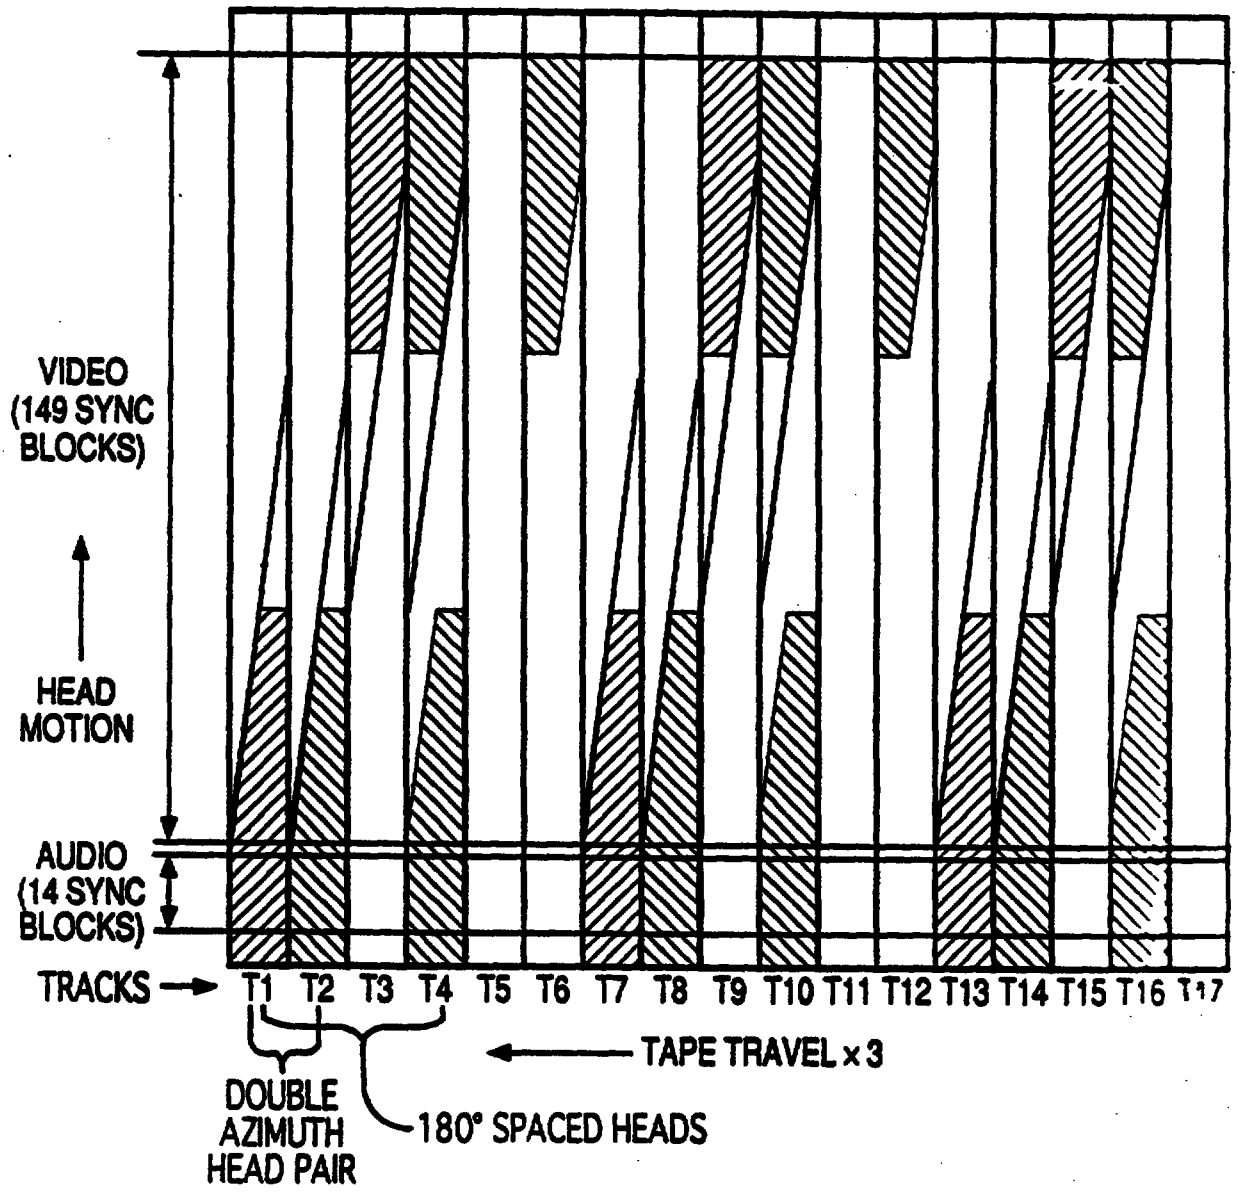

VIDEO
(149 SYNC
BLOCKS)
HEAD
MOTION
AUDIO
(14 SYNC
BLOCKS)
TRACKS
T1 T2 T3 T4 T5 T6 T7 T8 T9 T10 T11 T12 T13 T14 T15 T16 T17
TAPE TRAVEL x 3
DOUBLE
AZIMUTH
HEAD PAIR
180° SPACED HEADS

FIG. 9

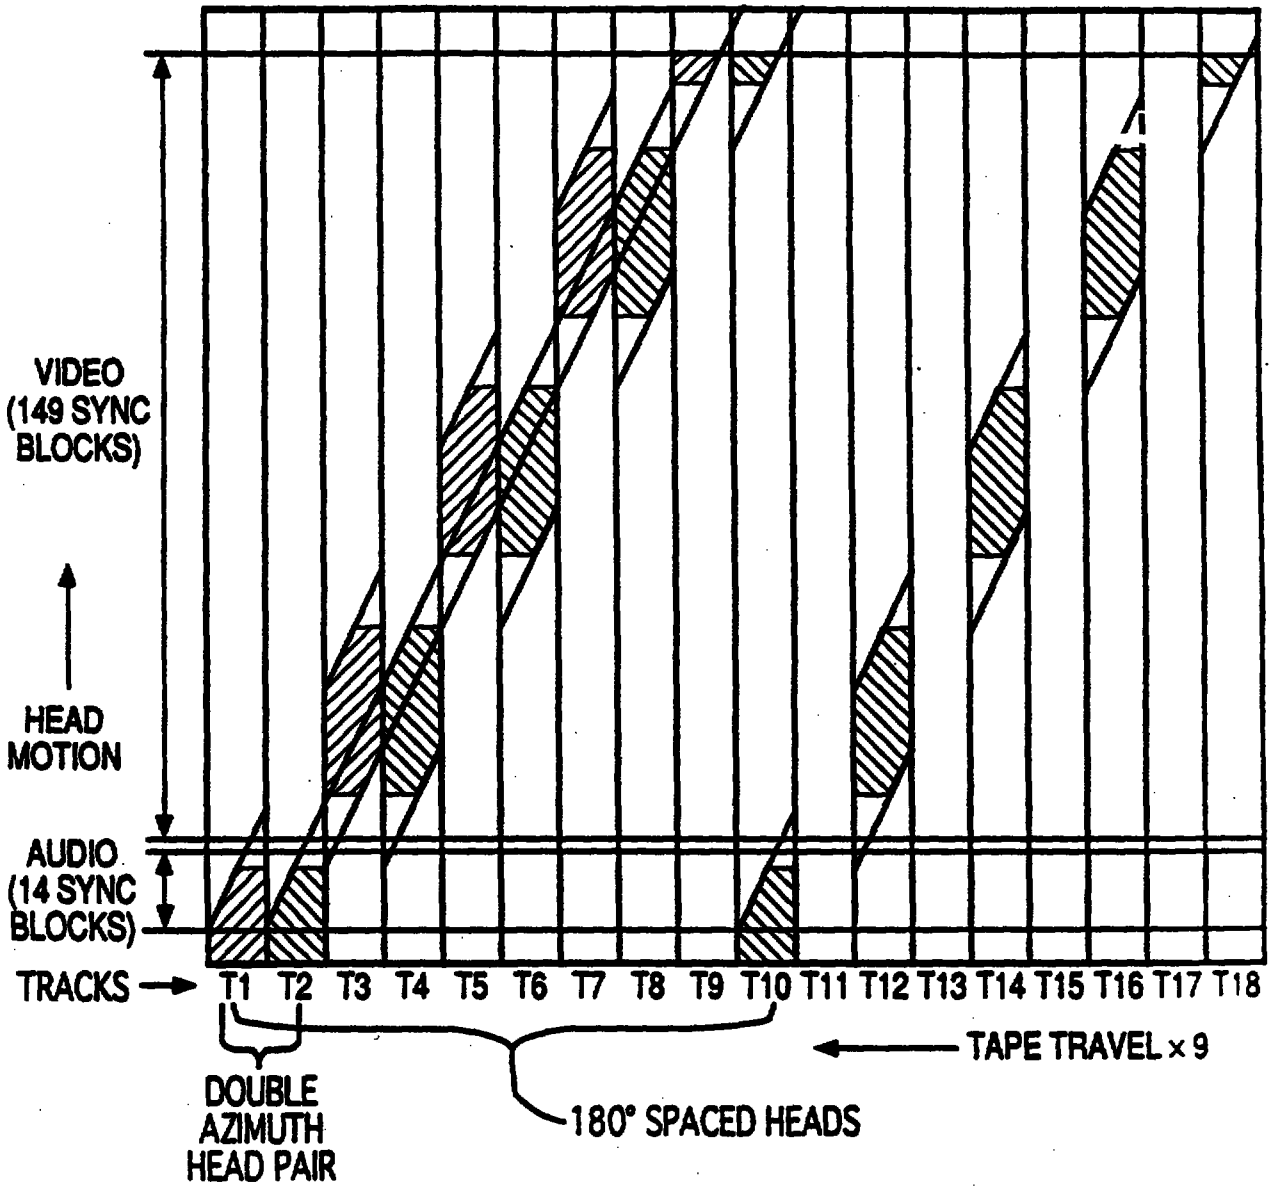

VIDEO
(149 SYNC
BLOCKS)
HEAD
MOTION
AUDIO
(14 SYNC
BLOCKS)
TRACKS
T1 T2 T3 T4 T5 T6 T7 T8 T9 T10 T11 T12 T13 T14 T15 T16 T17 T18
TAPE TRAVEL x 9
DOUBLE
AZIMUTH
HEAD PAIR
180° SPACED HEADS

FIG. 10

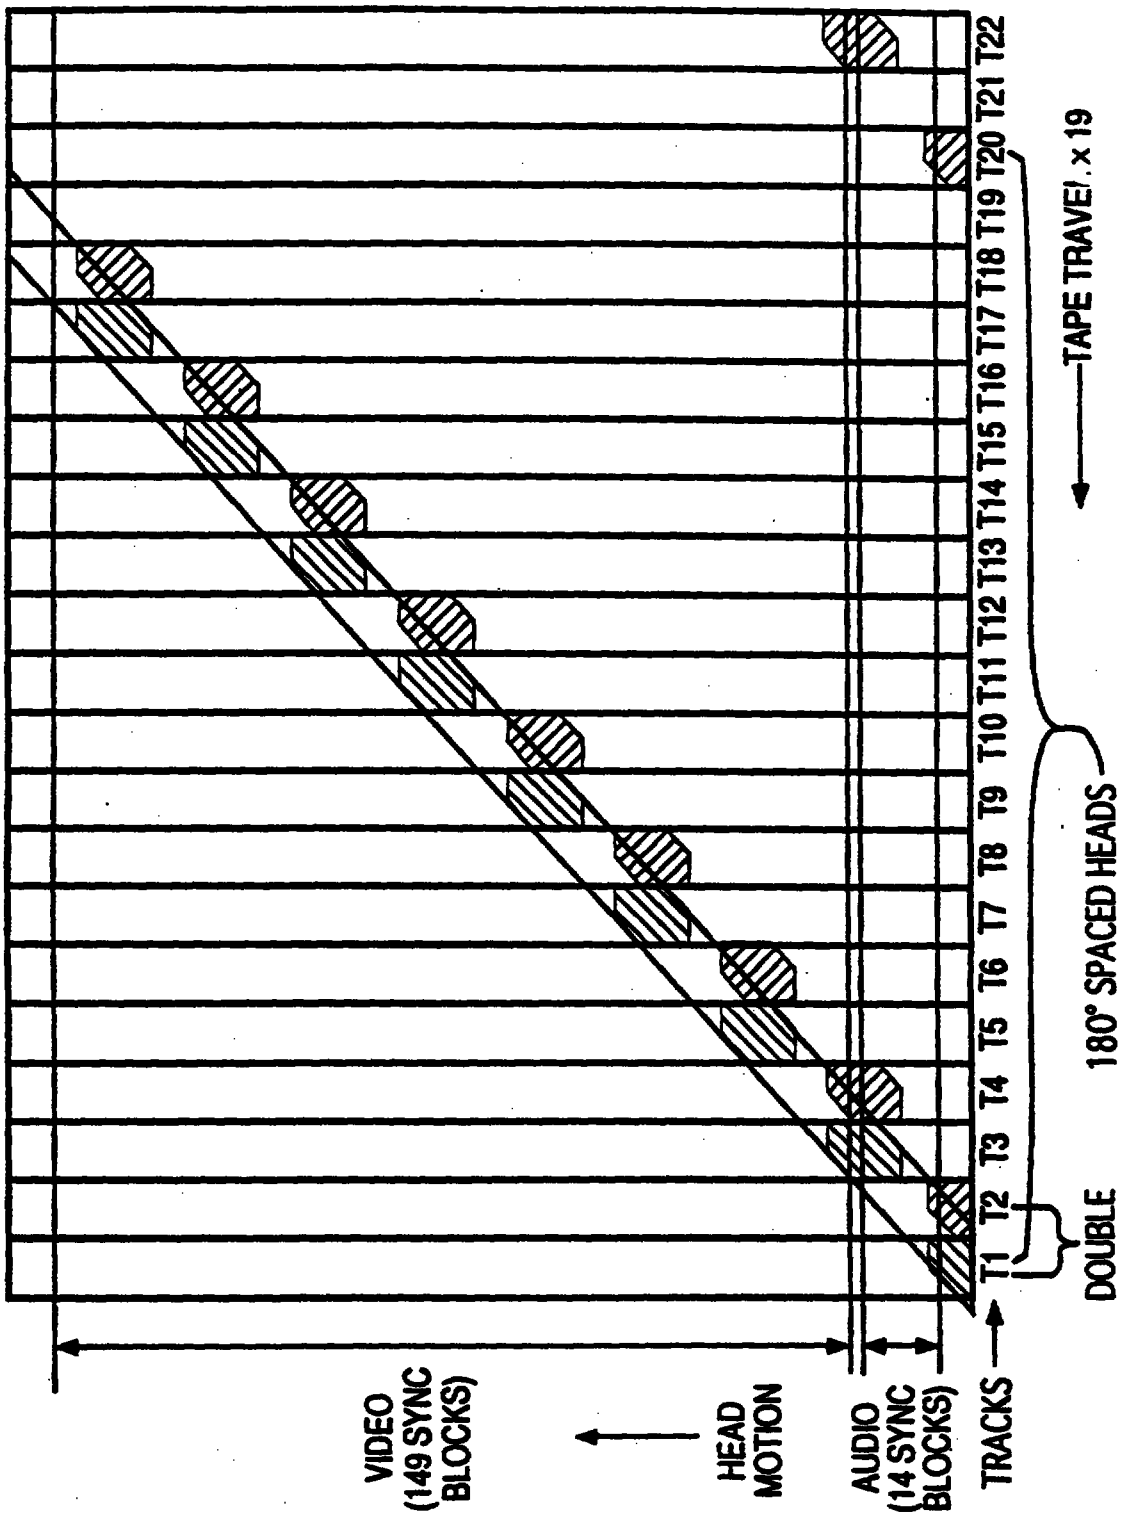

T1 T2 T3 T4 T5 T6 T7 T8 T9 T10 T11 T12 T13 T14 T15 T16 T17 T18 T19 T20 T21 T22
TAPE TRAVEL x 19
180° SPACED HEADS
DOUBLE AZIMUTH HEAD PAIR
TRACKS
VIDEO (149 SYNC BLOCKS)
HEAD MOTION
AUDIO (14 SYNC BLOCKS)

FIG. 11

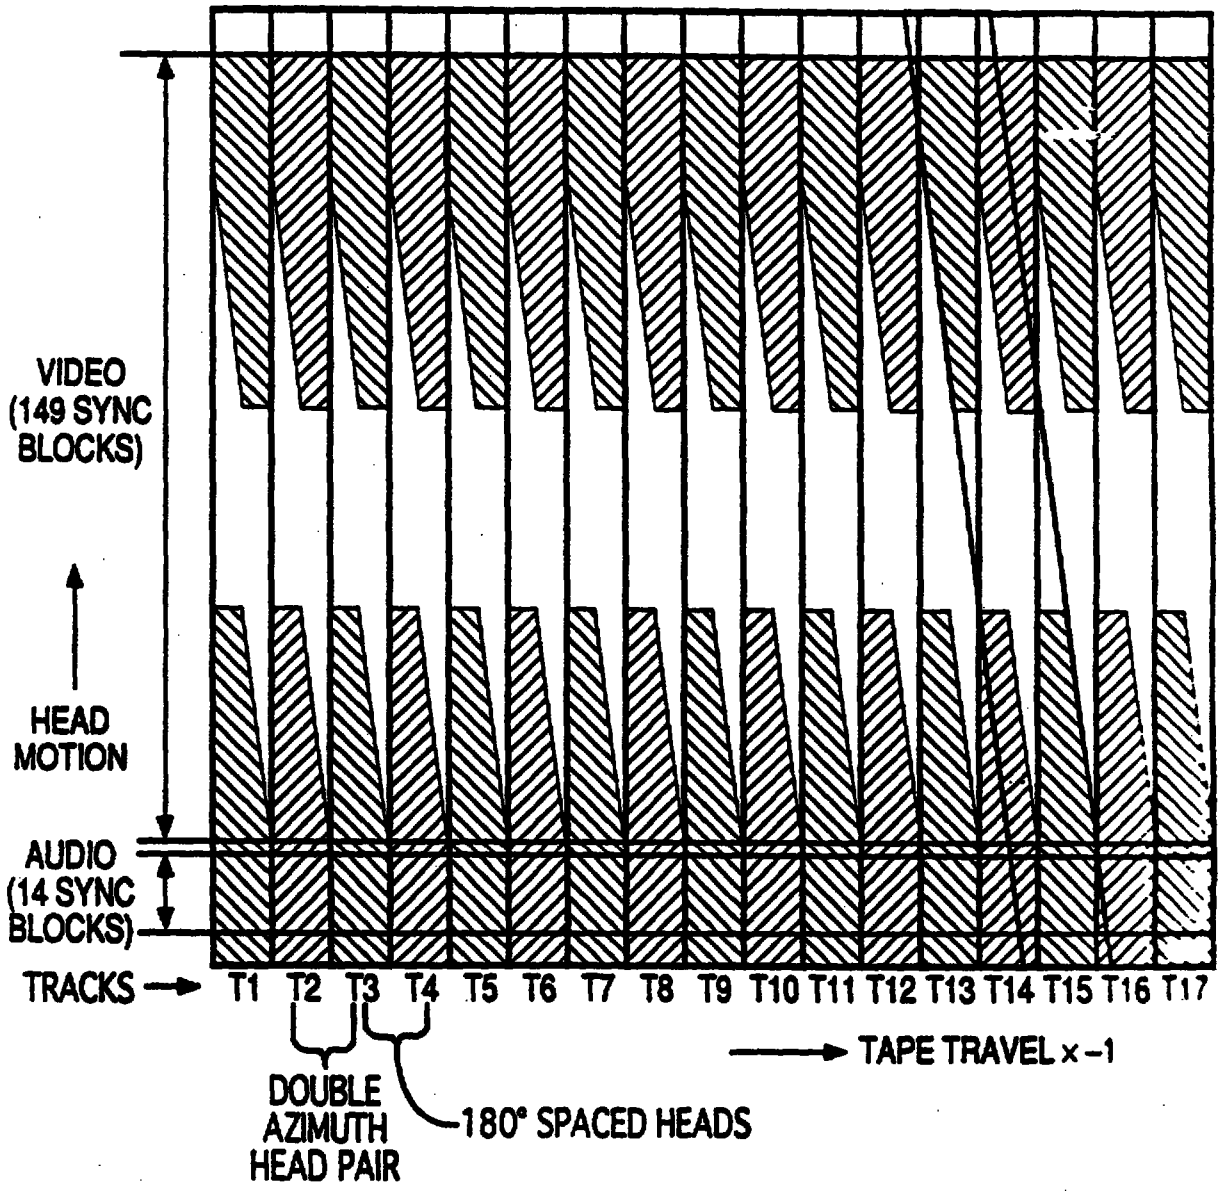

VIDEO
(149 SYNC
BLOCKS)
HEAD
MOTION
AUDIO
(14 SYNC
BLOCKS)
TRACKS
T1 T2 T3 T4 T5 T6 T7 T8 T9 T10 T11 T12 T13 T14 T15 T16 T17
TAPE TRAVEL x -1
DOUBLE
AZIMUTH
HEAD PAIR
180° SPACED HEADS

FIG. 12

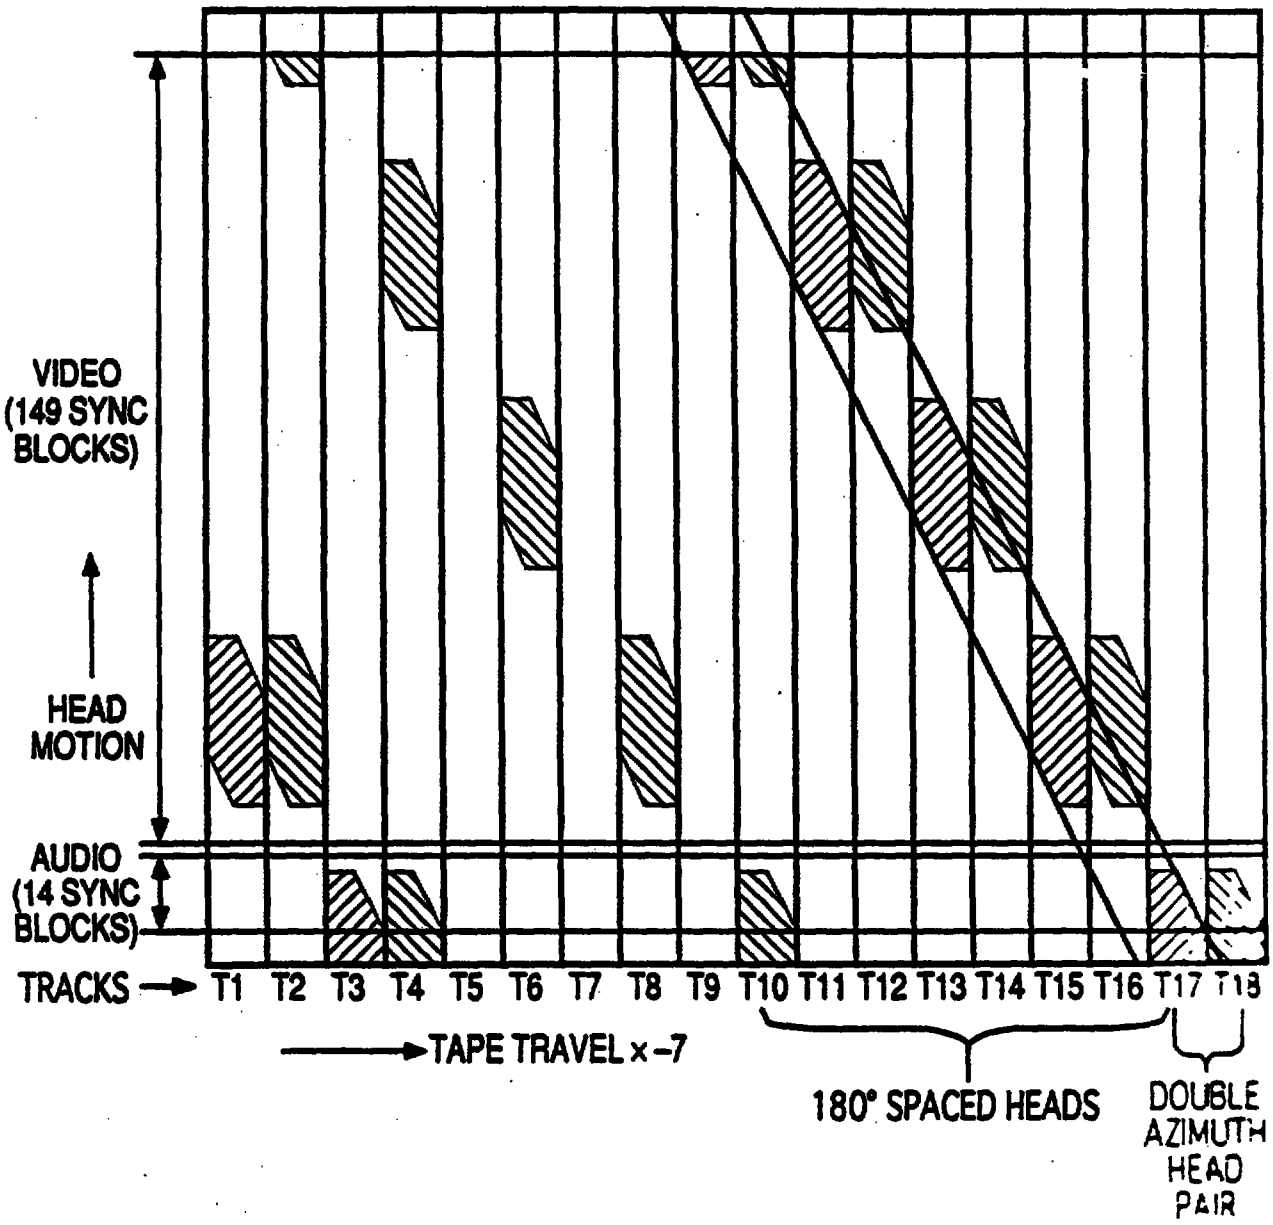

VIDEO
(149 SYNC
BLOCKS)
HEAD
MOTION
AUDIO
(14 SYNC
BLOCKS)
TRACKS
T1 T2 T3 T4 T5 T6 T7 T8 T9 T10 T11 T12 T13 T14 T15 T16 T17 T18
TAPE TRAVEL x -7
180° SPACED HEADS
DOUBLE
AZIMUTH
HEAD
PAIR

FIG. 13

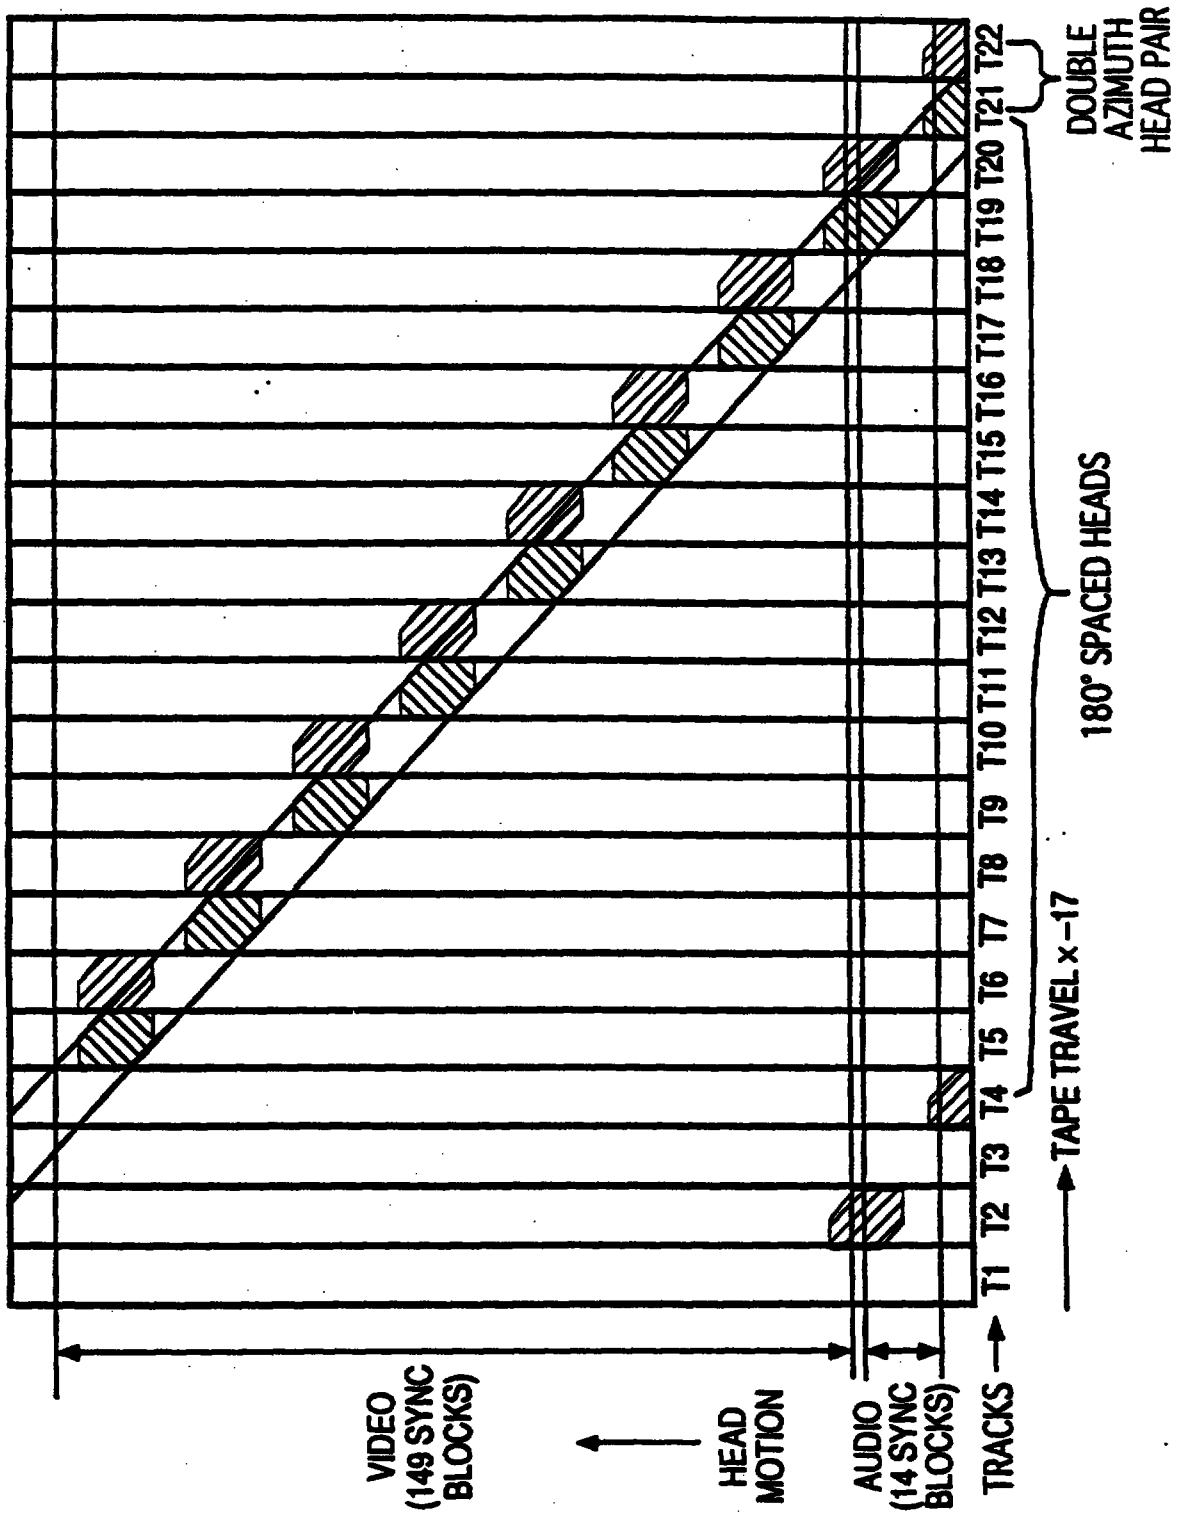

VIDEO (149 SYNC BLOCKS)
HEAD MOTION
AUDIO (14 SYNC BLOCKS)
TRACKS
T1 T2 T3 T4 T5 T6 T7 T8 T9 T10 T11 T12 T13 T14 T15 T16 T17 T18 T19 T20 T21 T22
TAPE TRAVEL x-17
180° SPACED HEADS
DOUBLE AZIMUTH HEAD PAIR

FIG. 14

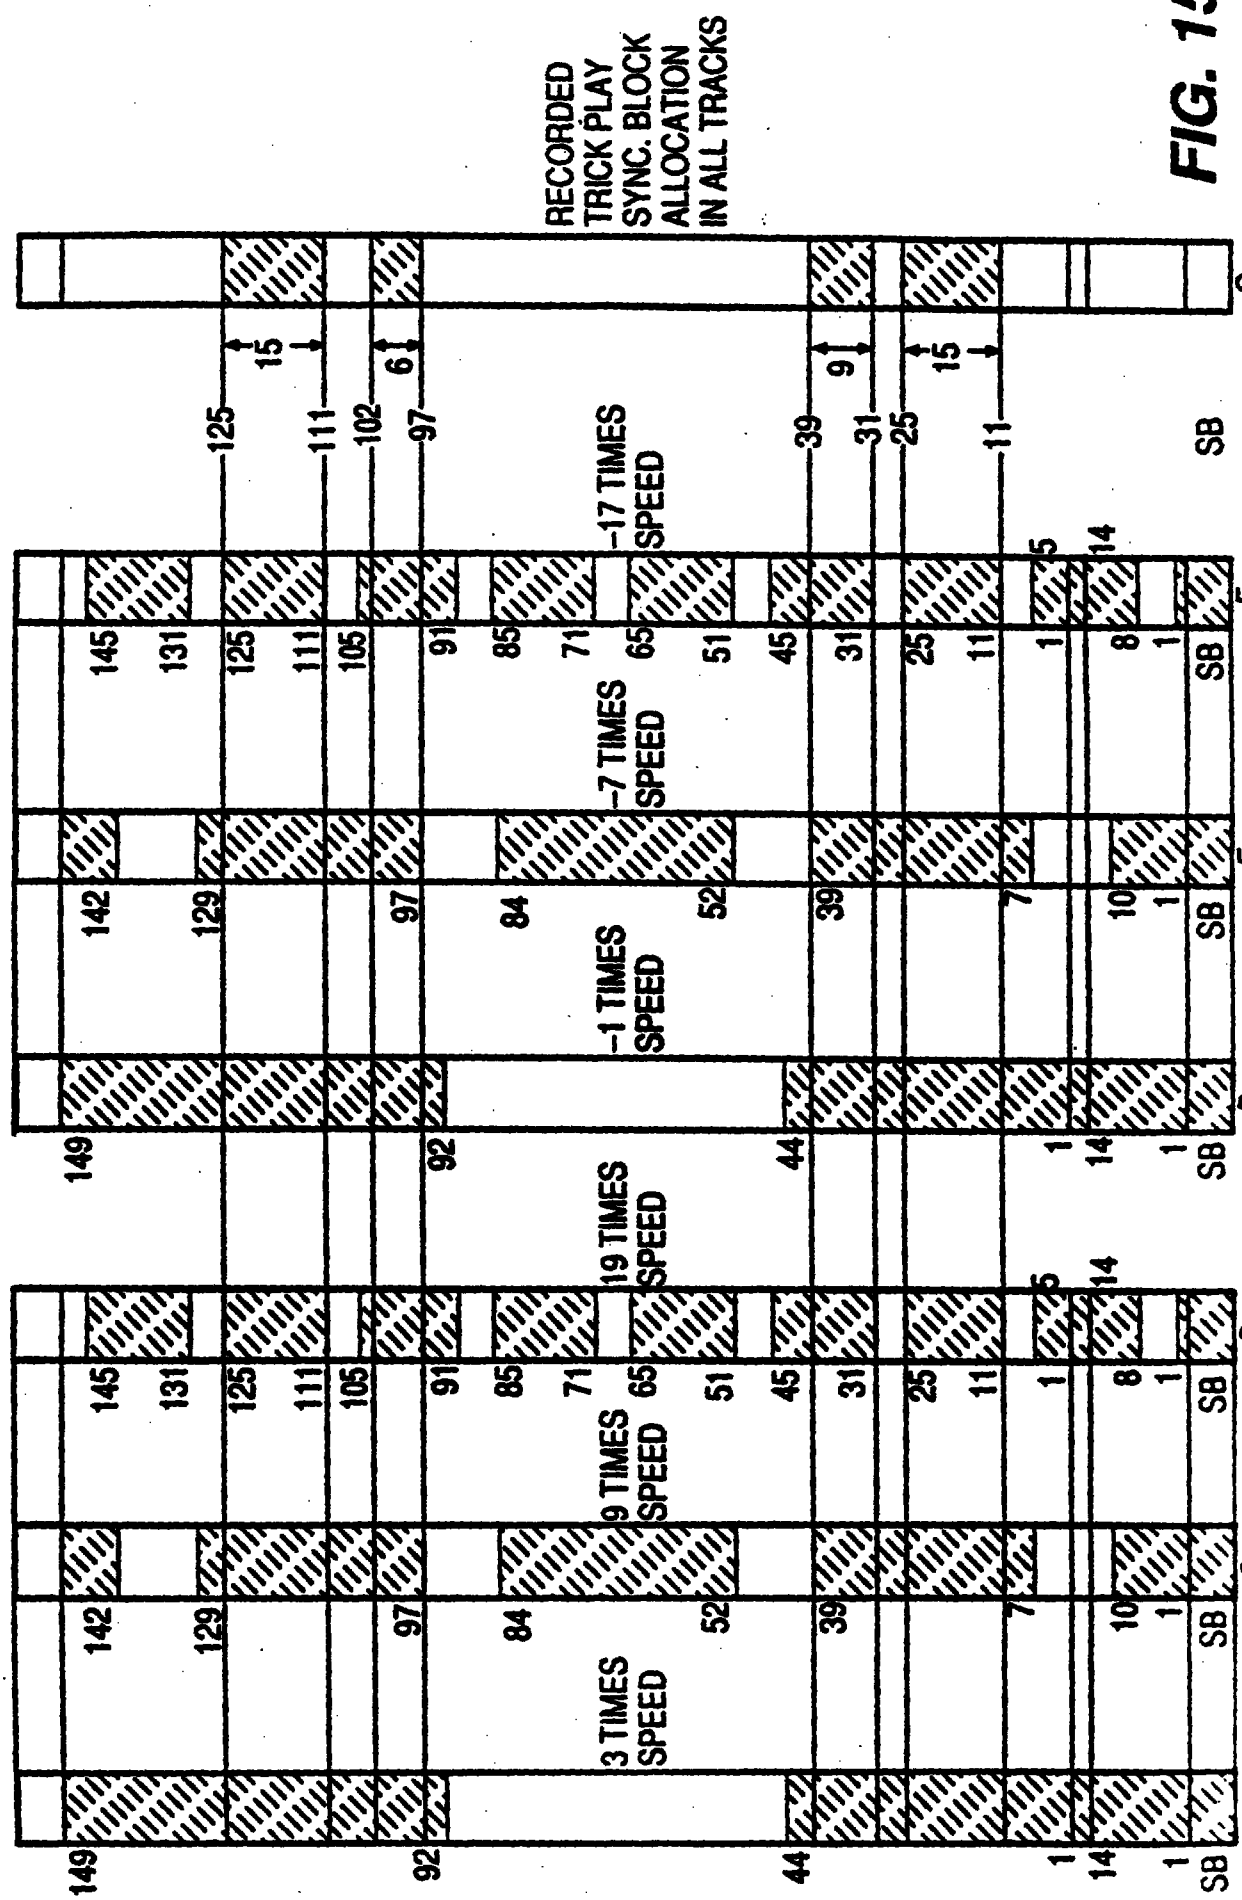

RECORDED TRICK PLAY SYNC. BLOCK ALLOCATION IN ALL TRACKS
3 TIMES SPEED
9 TIMES SPEED
19 TIMES SPEED
-1 TIMES SPEED
-7 TIMES SPEED
-17 TIMES SPEED
A
B
C
D
E
F
G
SB

FIG. 15

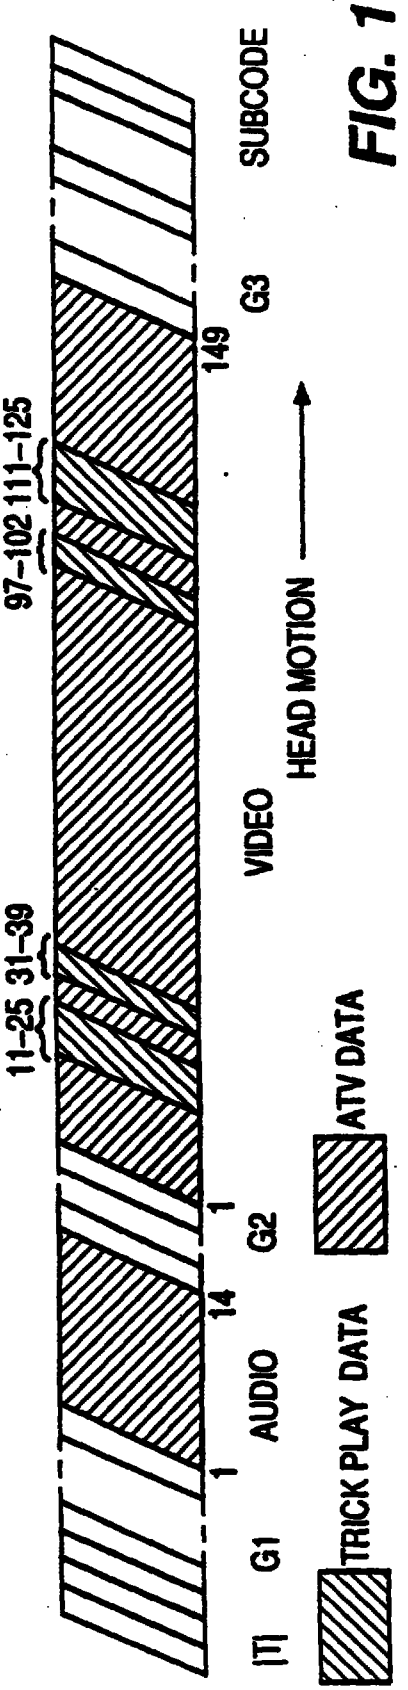

SUBCODE
G3
149
97–102 111–125
HEAD MOTION
VIDEO
11–25 31–39
ATV DATA
1
G2
14
AUDIO
1
G1
TRICK PLAY DATA

FIG. 16

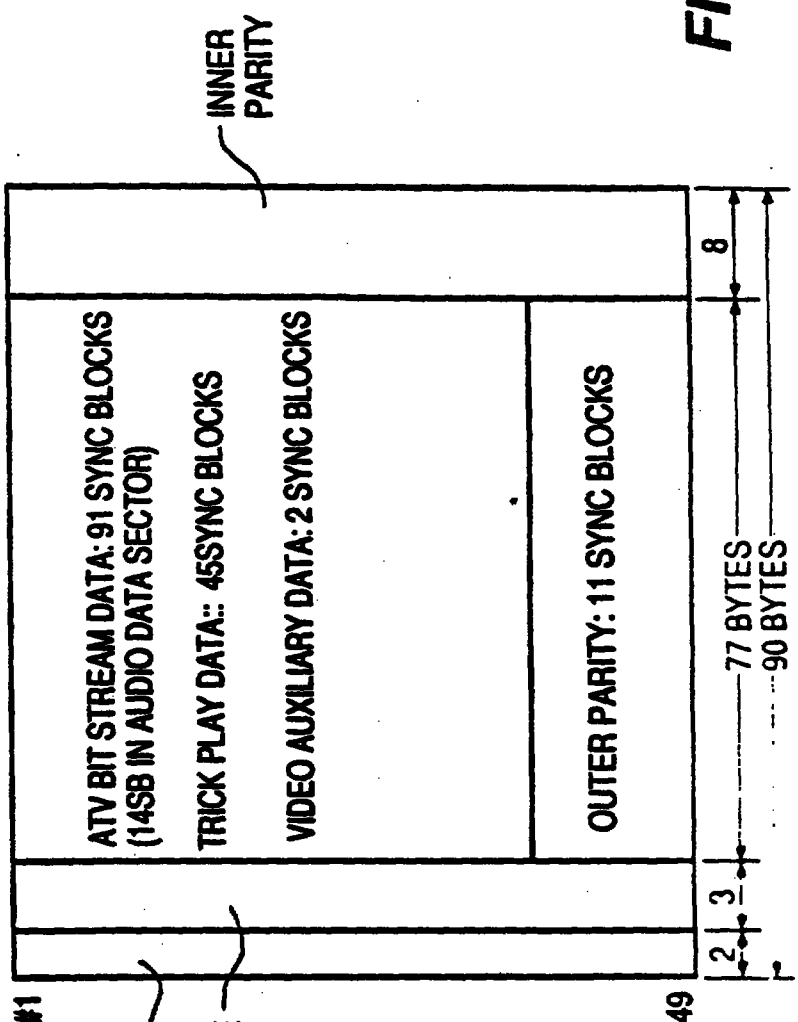

INNER PARITY
ATV BIT STREAM DATA: 91 SYNC BLOCKS (14SB IN AUDIO DATA SECTOR)
TRICK PLAY DATA:: 45SYNC BLOCKS
VIDEO AUXILIARY DATA: 2 SYNC BLOCKS
OUTER PARITY: 11 SYNC BLOCKS
SB #1
SYNC AREA
ID CODE
149
2
3
77 BYTES
90 BYTES
8

FIG. 17

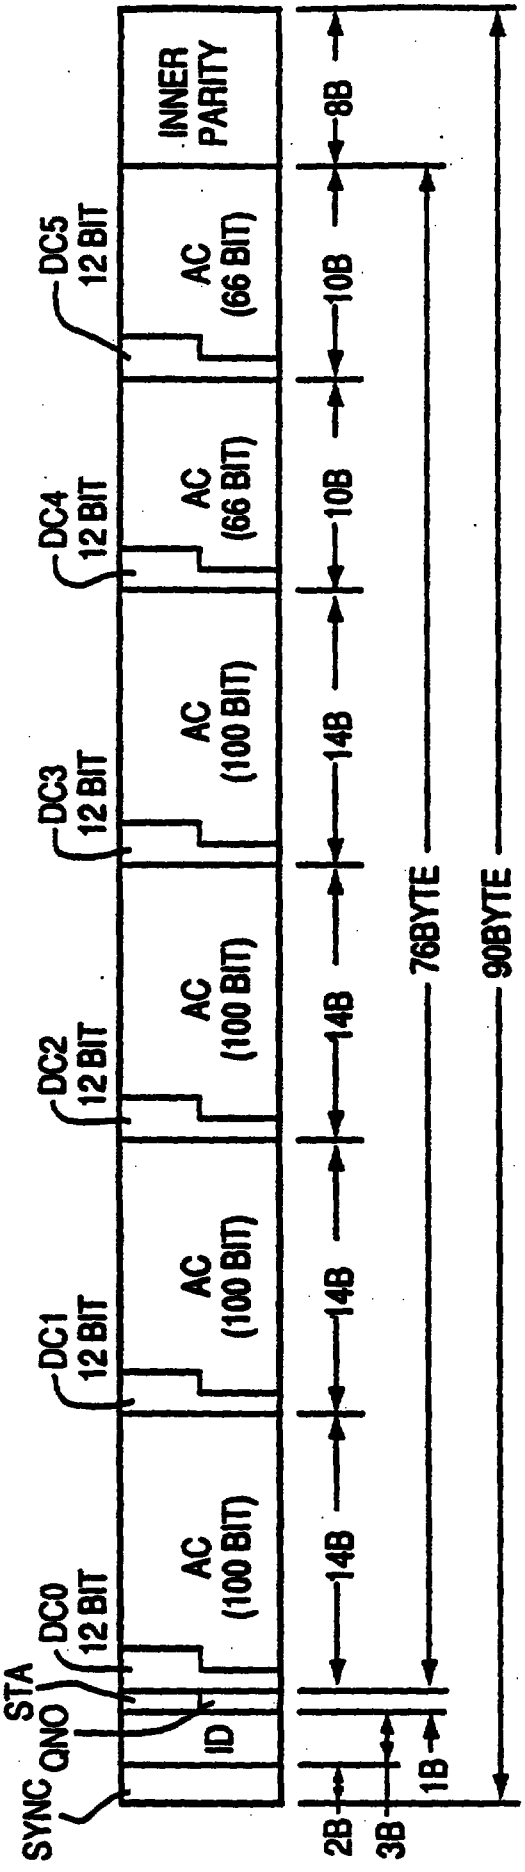


FIG. 18A

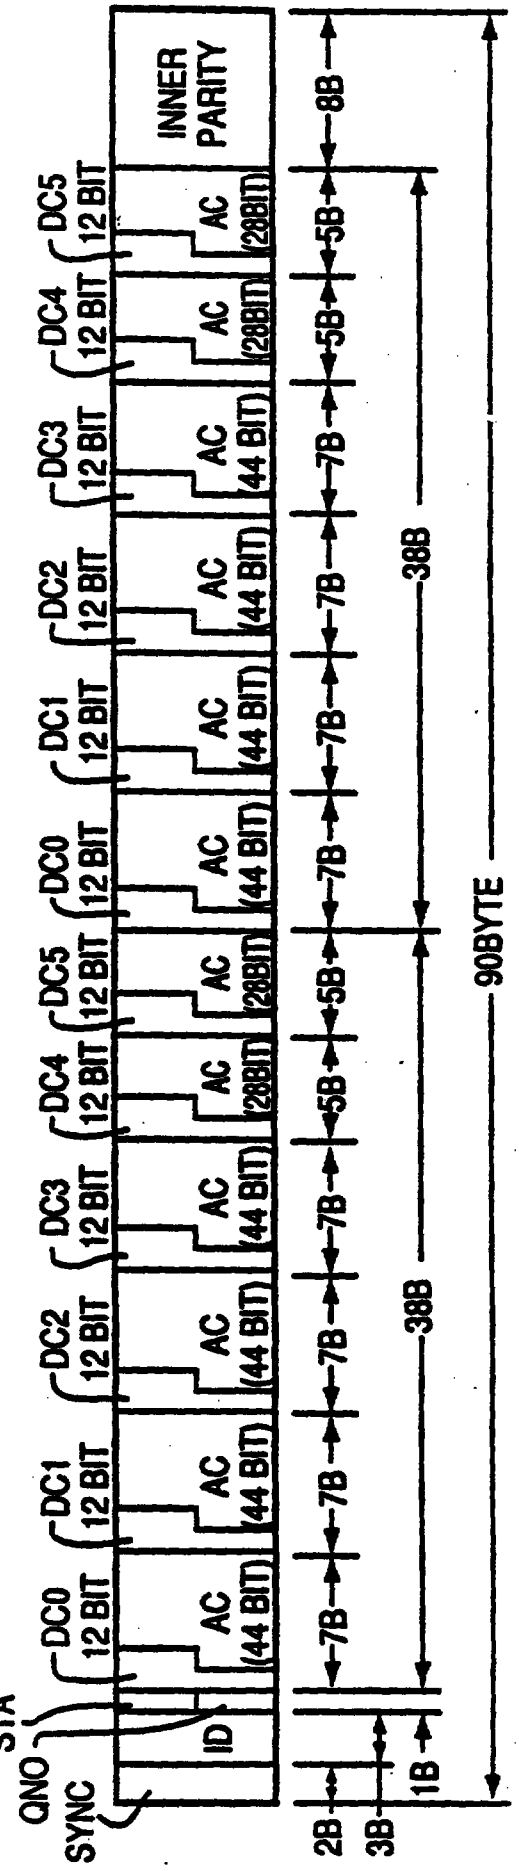


FIG. 18B

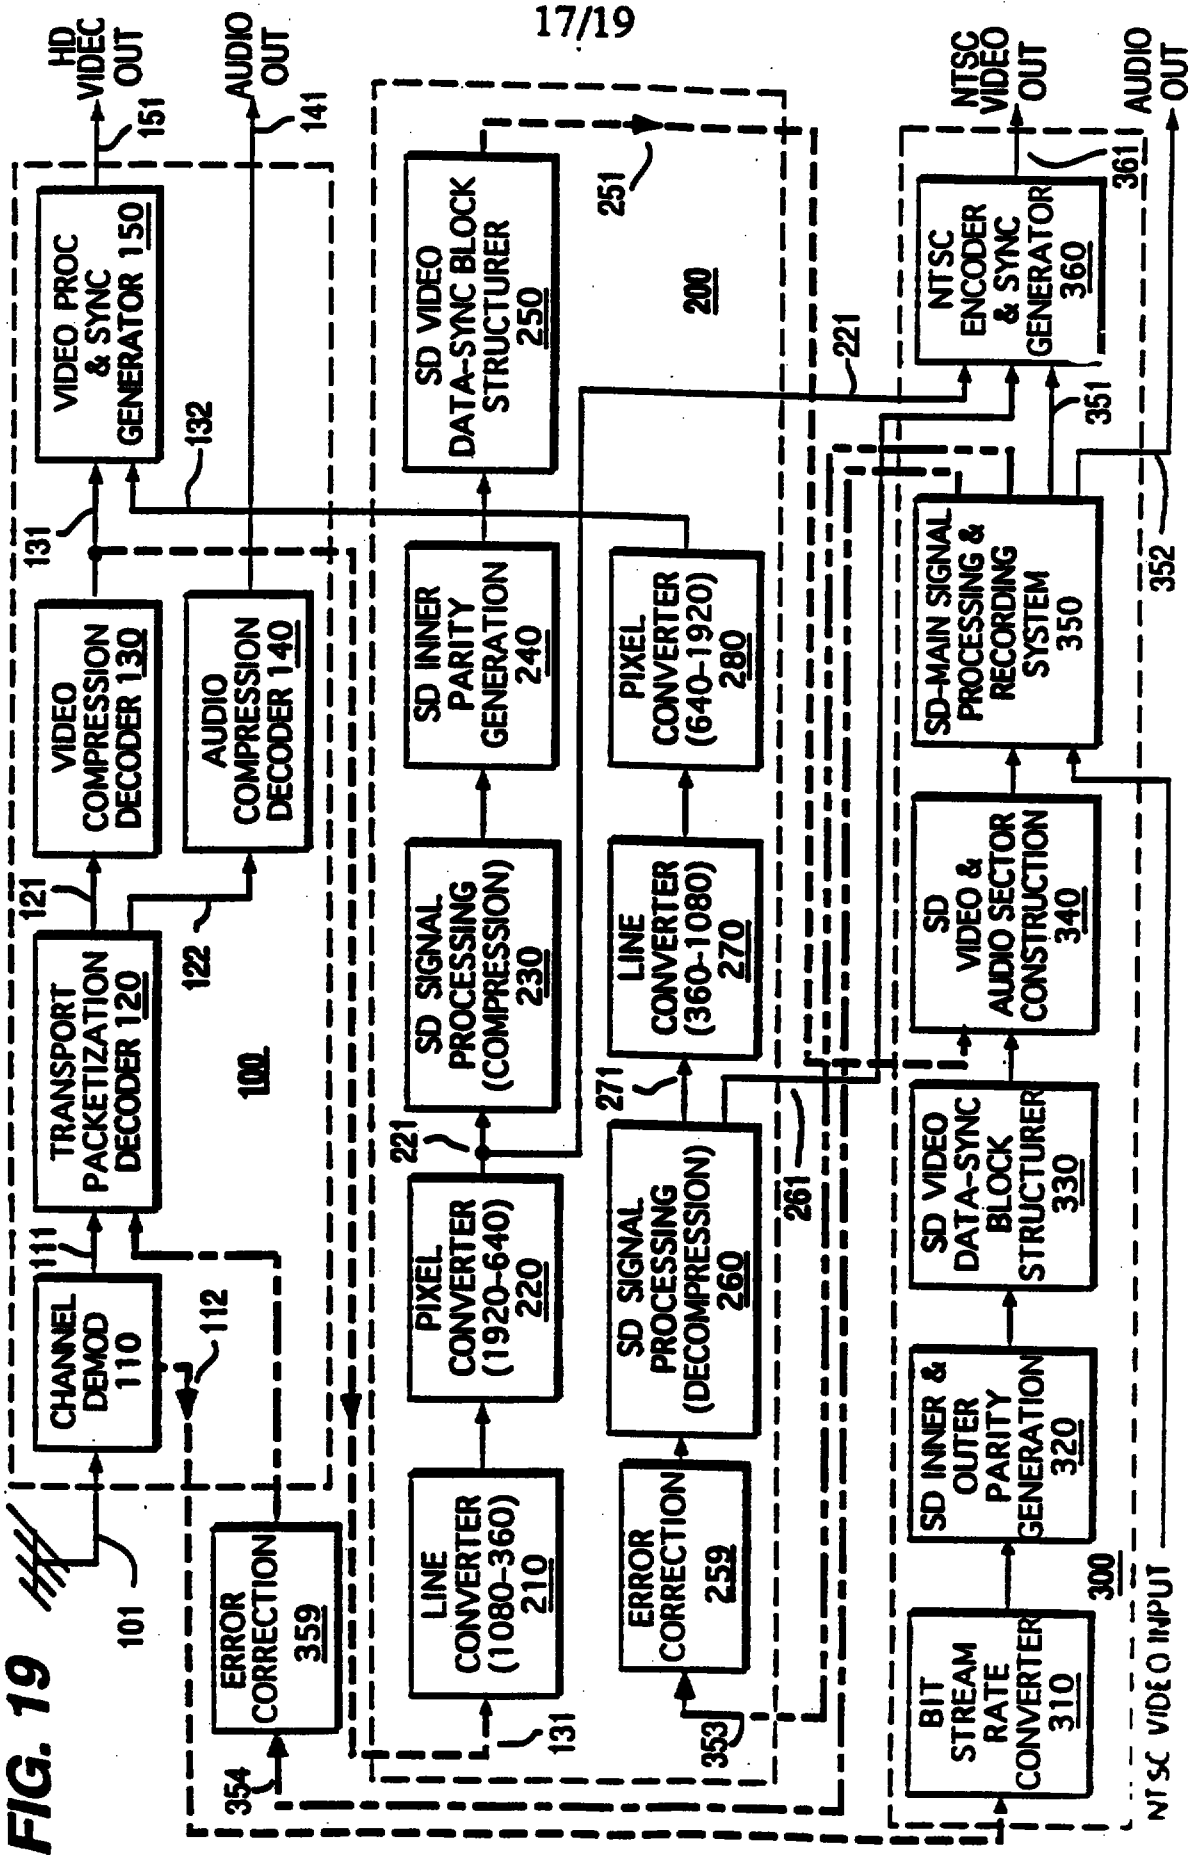
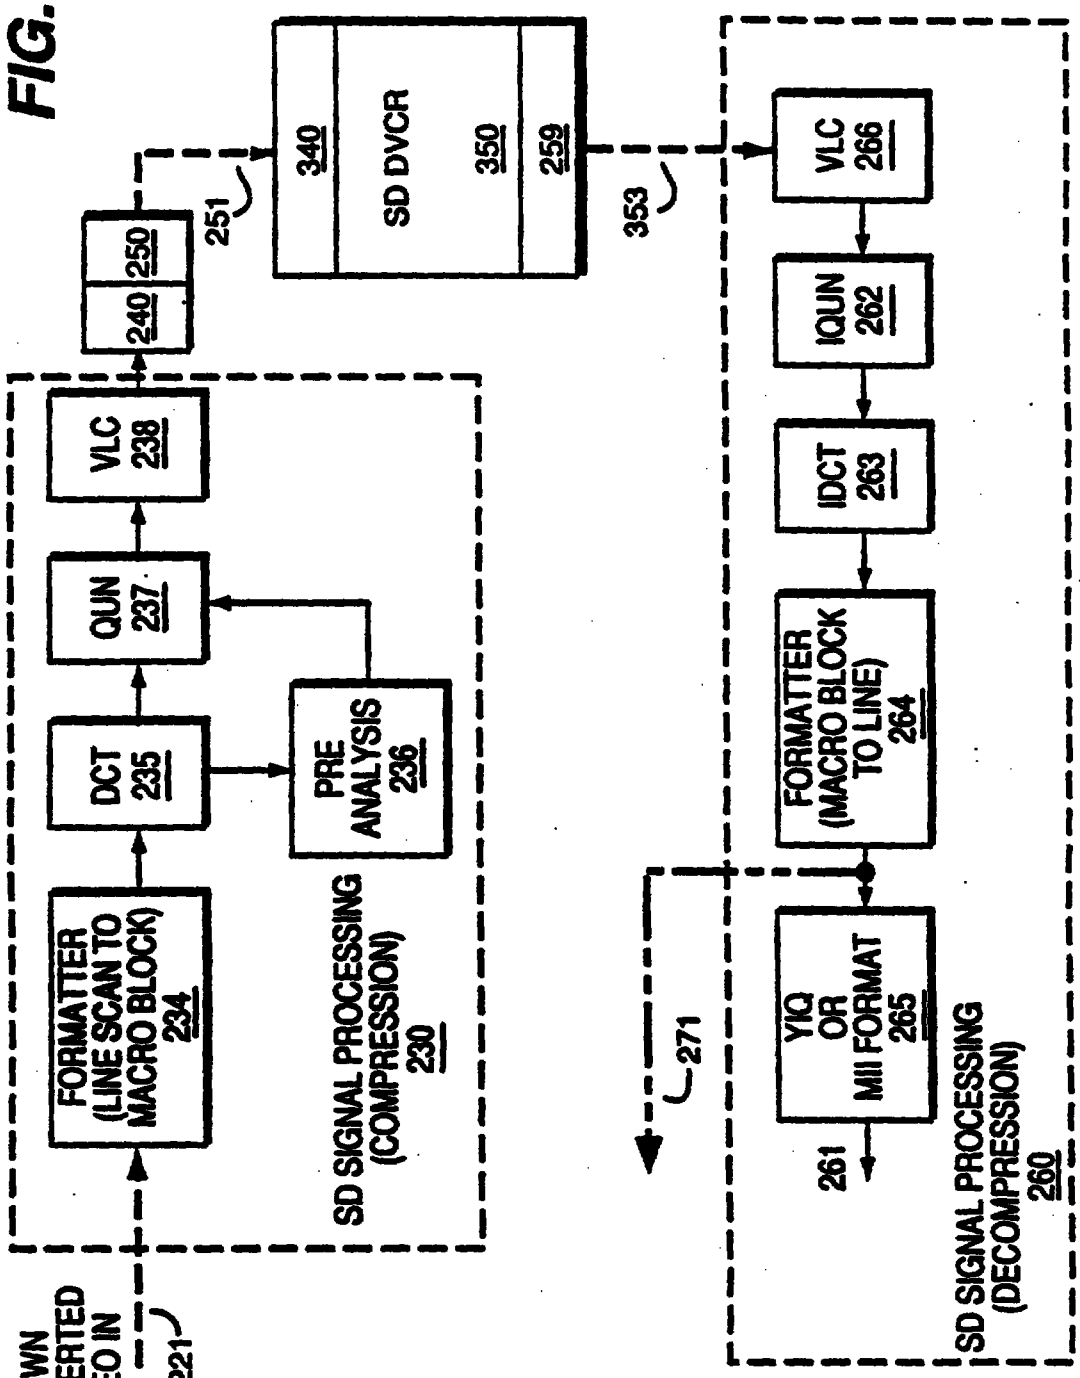

HD VIDEO OUT
151
AUDIO OUT
141
VIDEO PROC & SYNC GENERATOR 150
132
131
SD VIDEO DATA-SYNC BLOCK STRUCTURER 250
251
200
NTSC ENCODER & SYNC GENERATOR 360
NTSC VIDEO OUT
361
AUDIO OUT
351
221
VIDEO COMPRESSION DECODER 130
AUDIO COMPRESSION DECODER 140
SD INNER PARITY GENERATION 240
PIXEL CONVERTER (640-1920) 280
SD-MAIN SIGNAL PROCESSING & RECORDING SYSTEM 350
352
121
122
100
SD SIGNAL PROCESSING (COMPRESSION) 230
LINE CONVERTER (360-1080) 270
SD VIDEO & AUDIO SECTOR CONSTRUCTION 340
TRANSPORT PACKETIZATION DECODER 120
111
CHANNEL DEMOD 110
112
PIXEL CONVERTER (1920-640) 220
SD SIGNAL PROCESSING (DECOMPRESSION) 260
271
261
SD VIDEO DATA-SYNC BLOCK STRUCTURER 330
101
ERROR CORRECTION 359
LINE CONVERTER (1080-360) 210
ERROR CORRECTION 259
SD INNER & OUTER PARITY GENERATION 320
354
131
353
300
BIT STREAM RATE CONVERTER 310
NTSC VIDEO INPUT

FIG. 19

FIG. 20


DOWN CONVERTED VIDEO IN
221
SD SIGNAL PROCESSING (COMPRESSION) 230
FORMATTER (LINE SCAN TO MACRO BLOCK) 234
DCT 235
PRE ANALYSIS 236
QUN 237
VLC 238
240
250
251
SD DVCR
340
350
259
353
VLC 266
IQUN 262
IDCT 263
FORMATTER (MACRO BLOCK TO LINE) 264
YIQ OR MII FORMAT 265
271
261
SD SIGNAL PROCESSING (DECOMPRESSION) 260

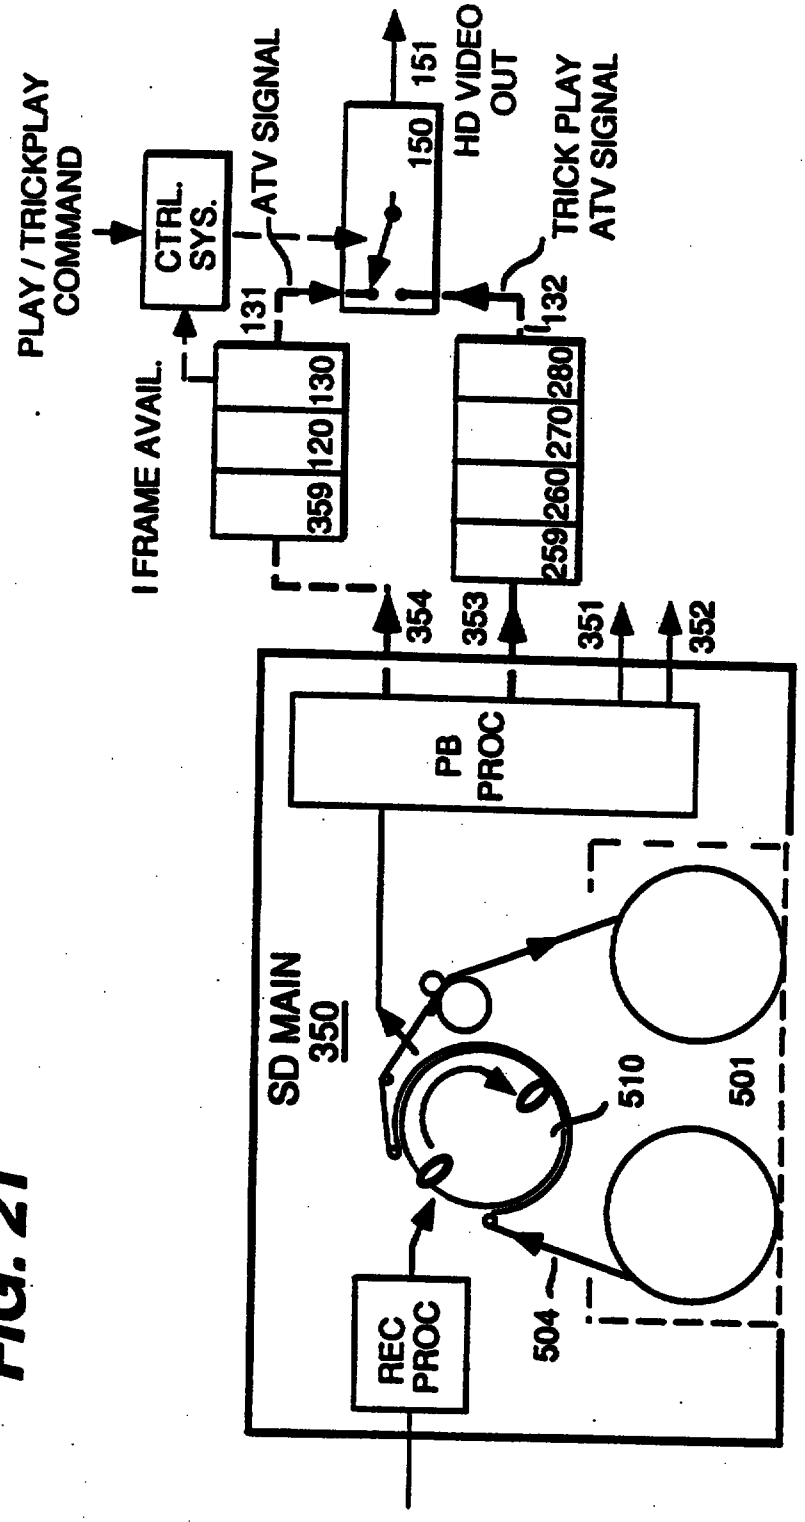

PLAY / TRICKPLAY COMMAND
CTRL. SYS.
ATV SIGNAL
131
150
151
HD VIDEO OUT
TRICK PLAY ATV SIGNAL
132
I FRAME AVAIL.
359
120
130
259
260
270
280
354
353
351
352
PB PROC
SD MAIN 350
510
501
504
REC PROC

FIG. 21

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04N 5/78, 5/76, G11B 15/12

A1

(11) International Publication Number: WO 95/28801

(43) International Publication Date: 26 October 1995 (26.10.95)

(21) International Application Number: PCT/IB95/00229

(22) International Filing Date: 3 April 1995 (03.04.95)

(30) Priority Data:

9407283.2	13 April 1994 (13.04.94)	GB
9407287.3	13 April 1994 (13.04.94)	GB
9410309.0	23 May 1994 (23.05.94)	GB

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published
With international search report.

(71) Applicant *(for all designated States except US)*: RCA THOMSON LICENSING CORPORATION [US/US]; Two Independence Way, Princeton, NJ 08540 (US).

(72) Inventor; and

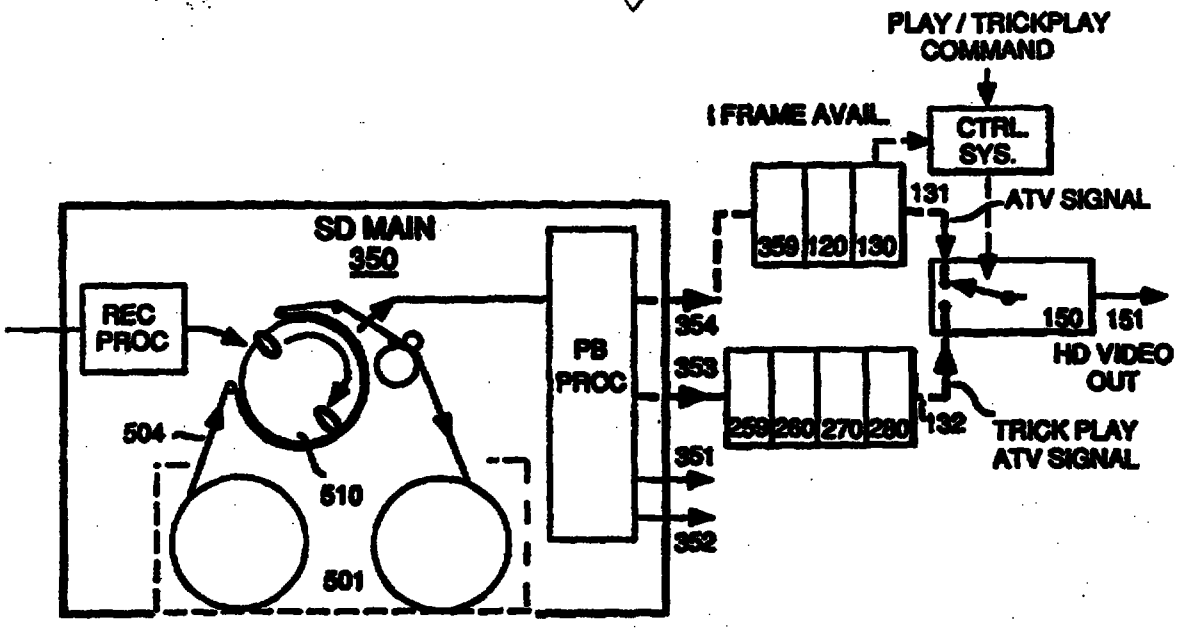
(75) Inventor/Applicant *(for US only)*: SAEKI, Tomoki [JP/JP]; 1106-13, Ichizawa-cho, Asahi-ku, Yokohama City, Kanagawa Pref. 241 (JP).

(74) Agents: TRIPOLI, Joseph, S. et al.; GE & RCA Licensing Management Operation, Inc., CN 5312, Princeton, NJ 08540 (US).

RTMP

SG 1611606-6

(54) Title: DIGITAL VCR WITH TRICK PLAY IMAGE CONTROL



(57) Abstract

A digital video cassette recorder (350) operates by the selection of predetermined replay speeds and the allocation of specific locations within each track from which data may be reproduced. These specific track locations are utilized during recording to place advance television image data for reproduction during "Trick Play" operation. The "Trick Play" image data (353) is also reproduced during normal playback but may not be utilized. The specific track locations are selected to facilitate "Trick Play" operation at a plurality of speeds in both forward and reverse directions. Since the advanced television signal comprises a plurality of predicted frames, transition from "Trick Play" to normal speed replay requires a control function which is responsive to the reproduction, at normal replay speed, of an interframe coded frame. Various methods of reproduced image transition are used for selecting both to and from "Trick Play" reproduction.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo			SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia
CM	Cameroon	LI	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

9611606-6