200002642-7

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : G11B 23/03

A1

(11) International Publication Number: WO 00/16334

(43) International Publication Date: 23 March 2000 (23.03.00)

(21) International Application Number: PCT/JP99/04844

(22) International Filing Date: 6 September 1999 (06.09.99)

(30) Priority Data:
10/261137 16 September 1998 (16.09.98) JP

(71) Applicant: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).


(72) Inventors: NISHINO, Yukio; 3-4-13, Tatsutagawa, Heguri-cho, Ikoma-gun, Nara 636-0912 (JP). GOTO, Yoshikazu; 1-10-11, Nishikinya, Hirakata-shi, Osaka 573-1192 (JP).

(74) Agent: YAMAMOTO, Shusaku; Crystal Tower, 15th floor, 2-27, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540-6015 (JP).

(81) Designated States: AU, BR, CA, CN, KR, SG

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments

(54) Title: CARTRIDGE

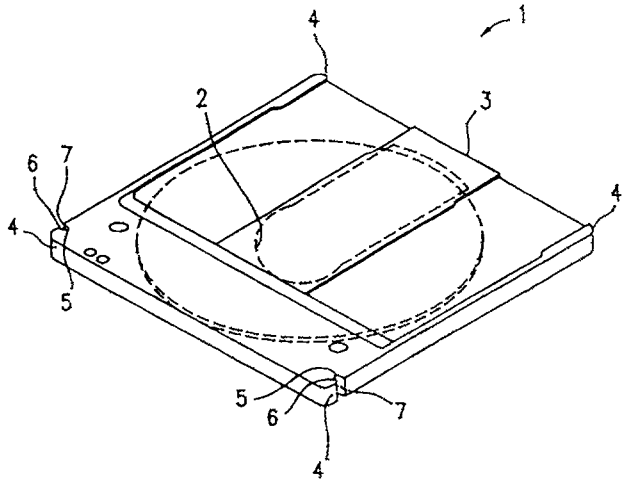

(57) Abstract

The present invention provides a cartridge accommodating a disk therein which is inserted into a cartridge holder, the cartridge holder being provided with a mis-insertion protection member. The mis-insertion protection member is located within an insertion path along which the cartridge is inserted into the cartridge holder. The cartridge has a substantially rectangular shape. The cartridge has a corner portion at each of four corners of the substantially rectangular shape, the corner portion being shaped so as to abut on the mis-insertion protection member to move the mis-insertion protection member out of the insertion path. The cartridge has at least two mis-insertion protection mechanisms for engaging with the mis-insertion protection member so as to prevent the cartridge from being mis-inserted. The cartridge has two side surfaces which are substantially perpendicular to a surface of the disk and extend along a direction substantially parallel to a direction in which the cartridge is inserted into the cartridge holder. A mis-insertion protection mechanism of the at least two mis-insertion protection mechanisms is provided on each of the side surfaces.