

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 August 2005 (04.08.2005)

PCT

(10) International Publication Number
WO 2005/069759 A2

(51) International Patent Classification: **Not classified**

(21) International Application Number:
PCT/US2004/035871

(22) International Filing Date: 28 October 2004 (28.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/481,568 28 October 2003 (28.10.2003) US
Not furnished 28 October 2004 (28.10.2004) US

(71) Applicant (for all designated States except US):
PERKINELMER LAS, INC. [US/US]; 549 Albany
Street, Boston, MA 02118 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CLARK, James, E.**
[US/US]; 736 Thornapple Drive, Naperville, IL 60540-
6315 (US).

(74) Agent: **MADDOX, Michael, W.**; 1445 Ross Avenue,
Suite 3200, Dallas, TX 75202 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR FLUID DISPENSING USING CURVILINEAR DRIVE WAVEFORMS

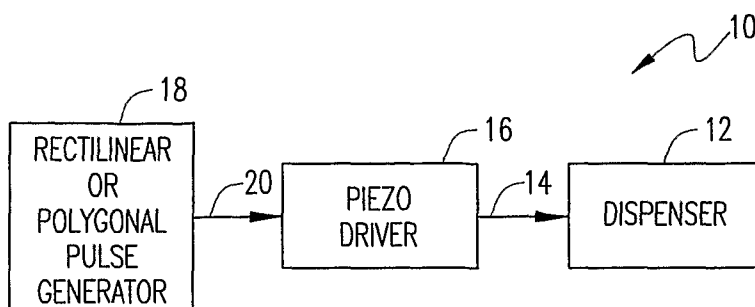

signal is applied to a fluid dispenser to cause fluid ejection.

(57) Abstract: A drive signal is generated having at least one pulsed curvilinear waveform shape. This drive signal is applied to a fluid dispenser to cause fluid ejection. Additionally, a drive signal is generated having one or more non-sinusoidal curvilinear waveform shapes. This drive signal is applied to a fluid dispenser to cause fluid ejection. Still further, a drive signal is generated having multiple segments including at least one segment having a curvilinear waveform shape. This drive