

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 August 2003 (21.08.2003)

PCT

(10) International Publication Number
WO 03/069461 A2

(51) International Patent Classification⁷: G06F 5/06

(21) International Application Number: PCT/US03/01944

(22) International Filing Date: 23 January 2003 (23.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/075,189 13 February 2002 (13.02.2002) US

(71) Applicant: MICRON TECHNOLOGY, INC. [US/US];
8000 South Federal Way, Boise, ID 83716-9632 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— without international search report and to be republished upon receipt of that report

(72) Inventor: KEETH, Brent; 5077 N. Fifeshire Pl., Boise, ID 83713 (US).

(74) Agents: STEFFEY, Charles, E. et al.; Schwegman, Lundberg, Woessner & Kluth, P.O. Box 2938, Minneapolis, MN 55402 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHODS AND APPARATUS FOR ADAPTIVELY ADJUSTING A DATA RECEIVER

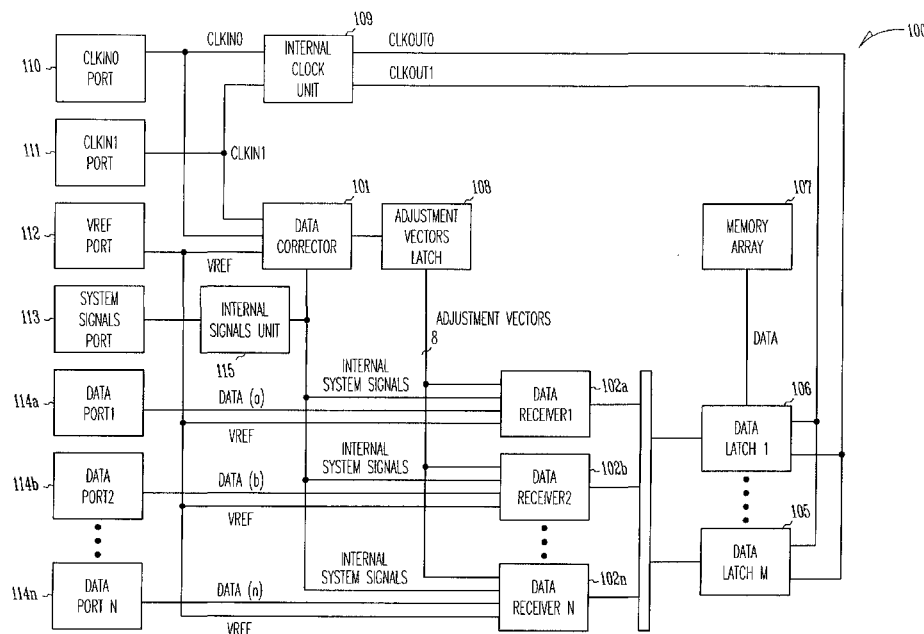

(57) Abstract: Offsets and timing skews in data signals captured in a data receiver are reduced by adaptively adjusting a transition threshold of the data receiver. A data corrector provides a set of adjustment vectors for adjusting the transition threshold of the data receiver. The data corrector uses differential clock signals and a reference voltage to generate the set of adjustment vectors to be provided to the data receivers. The data receiver is an improved receiver incorporating a trip point adjustor that receives the set of adjustment vectors from the data corrector to adjust its trip point relative to the reference voltage.



WO 03/069461 A2