

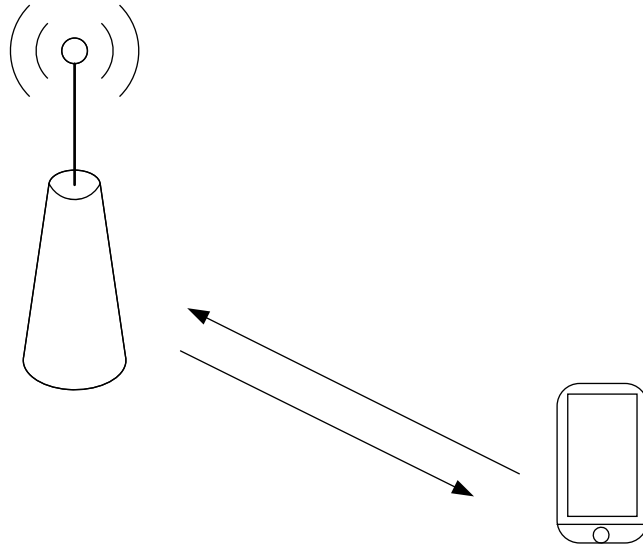


FIG. 1

reporting P-MPR indication information; the P-MPR indication information is configured to indicate at least one P-MPR, or is configured to indicate at least one P-MPR and reference signal resource identification indication information corresponding to the at least one P-MPR

S11

FIG. 2

obtaining P-MPR indication information reported by a terminal; the P-MPR indication information is configured to indicate at least one P-MPR, or is configured to indicate at least one P-MPR and reference signal resource identification indication information corresponding to the at least one P-MPR

S21

FIG. 3

100

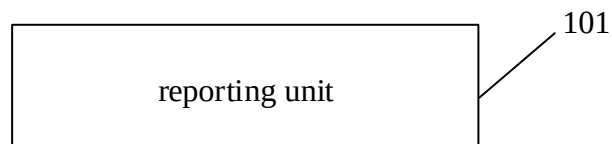


FIG. 4

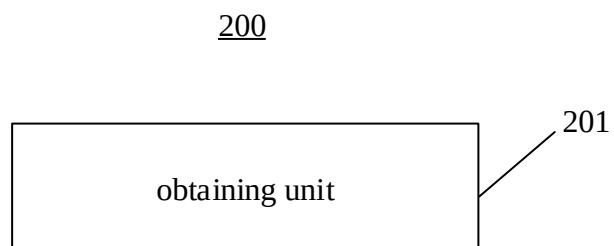


FIG. 5

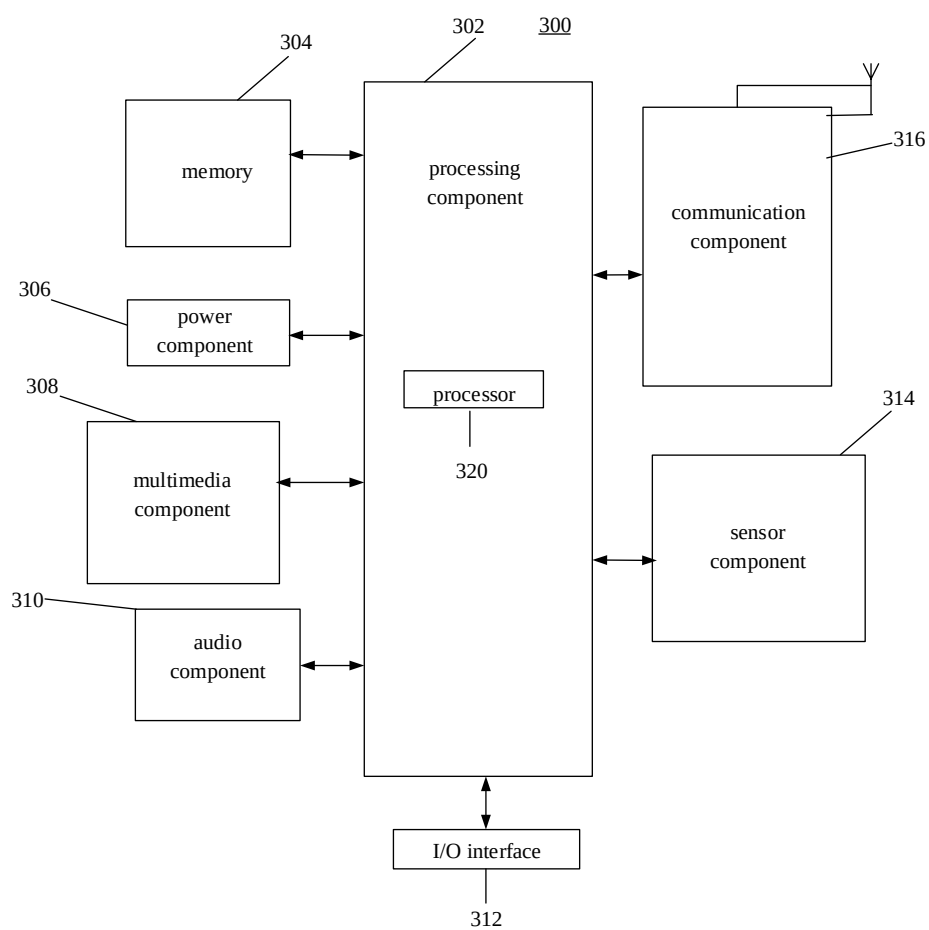


FIG. 6

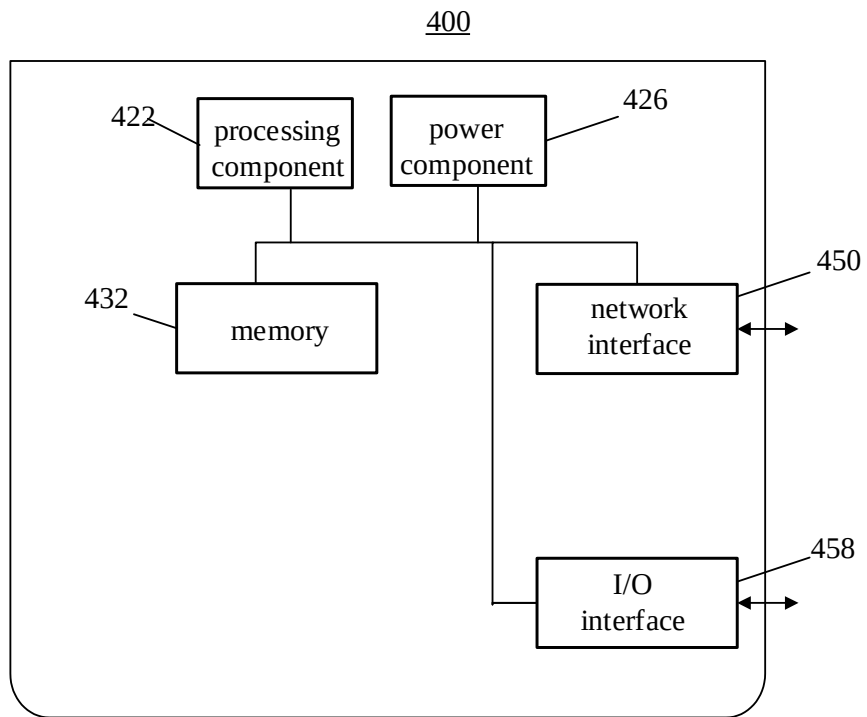


FIG. 7