



- (51) **International Patent Classification:**
B05C 5/00 (2006.01) *A23P 1/06* (2006.01)
B05D 1/30 (2006.01)
- (21) **International Application Number:**
PCT/EP2012/074188
- (22) **International Filing Date:**
3 December 2012 (03.12.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
11191843.9 5 December 2011 (05.12.2011) EP
- (71) **Applicant:** AKZO NOBEL CHEMICALS INTERNATIONAL B.V. [NL/NL]; Stationsstraat 77, NL-3811 MH Amersfoort (NL).
- (72) **Inventors:** BAKKENES, Hendrikus Wilhelmus; Rietdekkersdreef 850, NL-7328 AP Apeldoorn (NL). VAN LOTRINGEN, Theodorus Johannes Maria; Ulenpaslaan 25, NL-6825 ED Arnhem (NL).
- (74) **Agent:** AKZO NOBEL IP DEPARTMENT; Velperweg 76, NL-6824 BM Arnhem (NL).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) **Title:** DEVICE FOR DOSING AN ADDITIVE SOLUTION

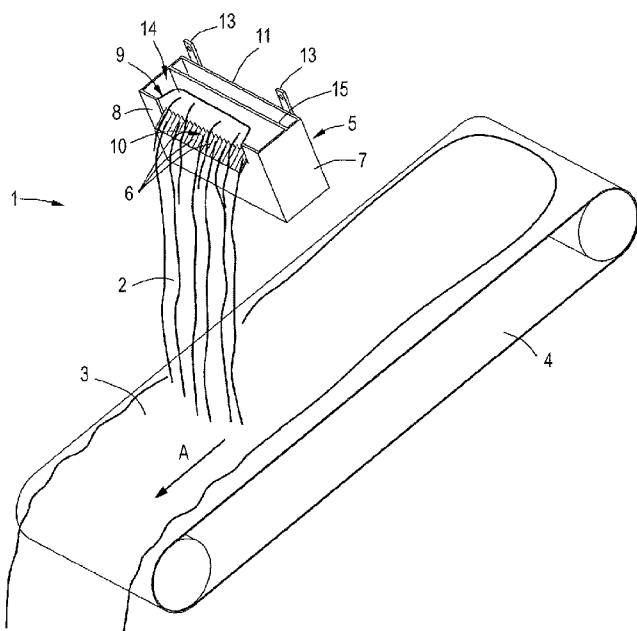


Figure 1

(57) **Abstract:** Device (1) and method for dosing an aqueous solution (2) of an additive, e.g., a non-caking agent, into an amount of a particulate material, such as a salt. The device comprises a conveyor (4) for transporting the particulate material and a dispenser (5) arranged above the conveyor. The dispenser is connected to a supply for the aqueous solution. The dispenser comprises a pouring outlet (10) extending over at least a part of the width of the conveyor (4). The additive solution is poured with a controlled flow velocity over at least a part of the width of the conveyor (4) transporting the particulate material.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*