



(51) International Patent Classification:
A47J 25/00 (2006.01)

(21) International Application Number:
PCT/US2013/055886

(22) International Filing Date:
20 August 2013 (20.08.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/722,683 5 November 2012 (05.11.2012) US
61/849,923 4 February 2013 (04.02.2013) US
61/957,958 16 July 2013 (16.07.2013) US

(72) Inventor; and

(71) Applicant : GOODMAN, David L. [US/US]; 11502
April Dr, Austin, Texas 78753 (US).

(74) Agent: BLUMBERG, Robert E.; Soquel Group, LLC,
P.O. Box 691, Soquel, California 95073 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A DEVICE FOR OPENING COCONUTS

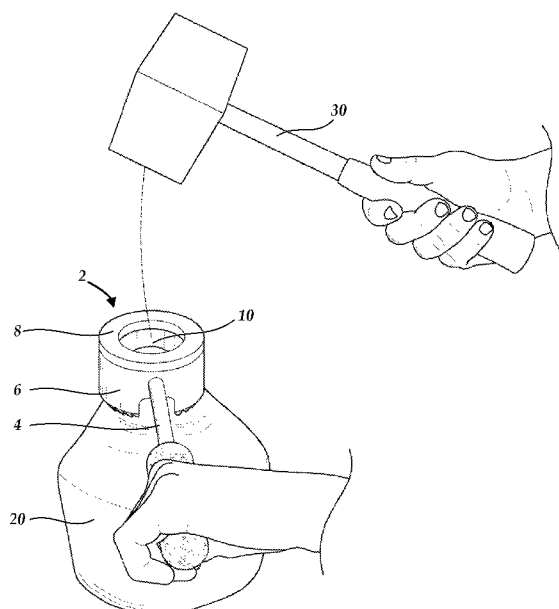


Fig. 1

(57) Abstract: The subject invention is a device for opening
coconuts that includes a handle and a cutting cylinder at-
tached to the handle, including a cutting edge at one end, and
a cap that provides a striking surface. The cutting cylinder
may have teeth and may have a gap. The cutting cylinder or
the teeth may be beveled.