



(51) International Patent Classification:
F26B 15/12 (2006.01) *F26B 21/00* (2006.01)

(21) International Application Number:
PCT/EP2013/075696

(22) International Filing Date:
5 December 2013 (05.12.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12290428.7 5 December 2012 (05.12.2012) EP

(71) Applicant: SAINT-GOBAIN PLACO SAS [FR/FR]; 34
Avenue Franklin Roosevelt, F-92150 Suresnes (FR).

(72) Inventors: MONGROLLE, Jean-Louis; Bâtiment DT-
CT-GPI, 306-348 rue de Meaux, F-93410 Vaujours B.P.6
(FR). LALANDE, Jérôme; Bâtiment DT-CT-GPI, 306-
348 rue de Meaux, F-93410 Vaujours B.P.6 (FR).
GOODAIRE, Martin; Saint-Gobain House, Binley Busi-

ness Park, Coventry Warwickshire CV3 2TT (GB).
SELBY, Stephen; Saint-Gobain House, Binley Business
Park, Coventry Warwickshire CV3 2TT (GB).

(74) Agents: PUGSLEY, Victoria et al.; 18 Staple Gardens,
Winchester Hampshire SO23 8SR (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: DRYING SYSTEM

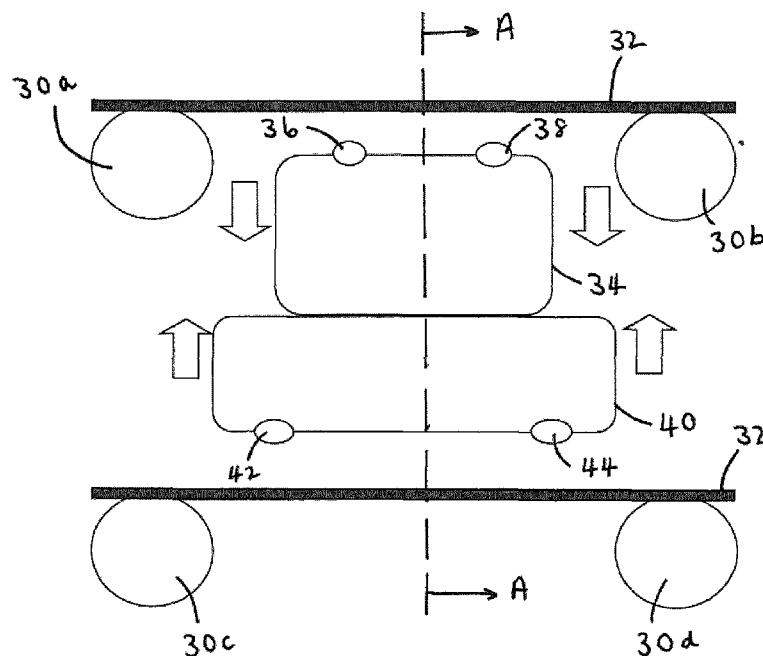


Fig. 2

[Continued on next page]



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(57) Abstract: A drier for drying boards (32) comprises at least one conduit (34, 40) for directing airflow towards one of the faces of the board (32). The drier is configured such that at least a portion of the airflow travels across the face of the board (32) along the longitudinal axis of the drier, the longitudinal axis of the drier being the axis along which the board (32) travels as it is dried.