SG 9706099-0
RTMP
COPY

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : E21B 17/08, 43/10, 43/08 — A1

(11) International Publication Number: WO 96/37680

(43) International Publication Date: 28 November 1996 (28.11.96)

(21) International Application Number: PCT/EP96/02271

(22) International Filing Date: 23 May 1996 (23.05.96)

(30) Priority Data:
9510465.9 24 May 1995 (24.05.95) GB

(71) Applicant *(for all designated States except CA US)*: SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V. [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).


(71) Applicant *(for CA only)*: SHELL CANADA LIMITED [CA/CA]; 400 - 4th Avenue S.W., Calgary, Alberta T2P 2H5 (CA).

(72) Inventor; and
(75) Inventor/Applicant *(for US only)*: LOHBECK, Wilhelmus, Christianus, Maria [NL/NL]; Volmerlaan 6, NL-2288 GD Rijswijk (NL).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: CONNECTOR ASSEMBLY FOR AN EXPANDABLE SLOTTED PIPE

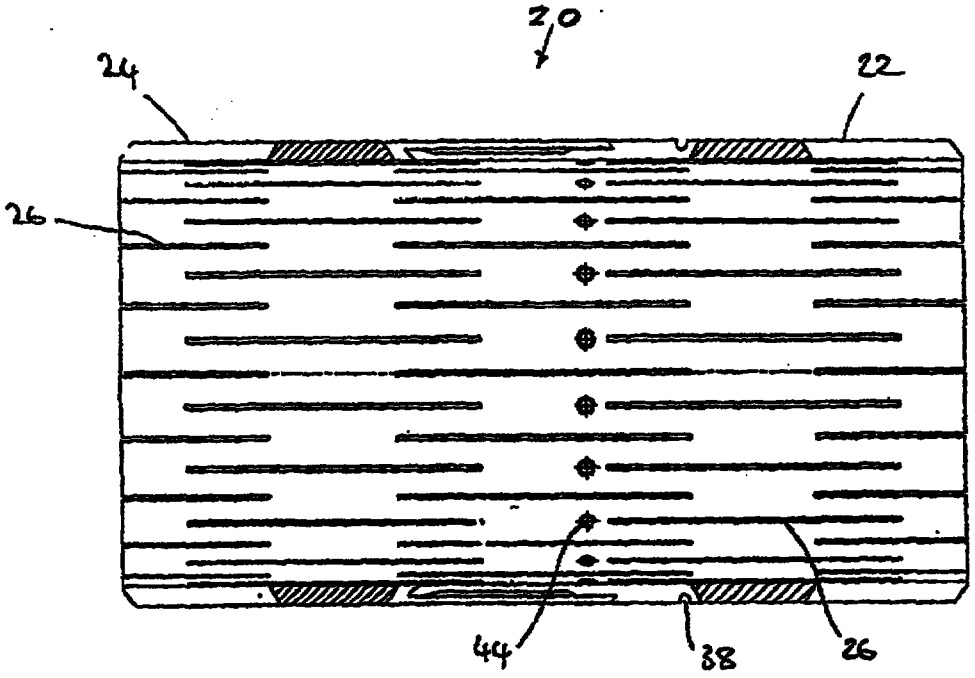

(57) Abstract

A connector assembly for interconnecting sections of an expandable slotted tubing string (10) comprises a male part (22) and a female part (24) for mounting on the ends of respective tubing sections. Each part is slotted and adapted to co-axially engage the other part to permit expansion of the coupled parts in a corresponding manner to the tubing string without flaring of the coupled parts.