

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 December 2005 (08.12.2005)

PCT

(10) International Publication Number
WO 2005/116135 A1

(51) International Patent Classification⁷: **C08L 33/10**,
C08J 5/04, E01C 9/00, 7/30

(21) International Application Number:
PCT/AU2005/000751

(22) International Filing Date: 30 May 2005 (30.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004902827 28 May 2004 (28.05.2004) AU

(71) Applicant and

(72) Inventor: CUMMINS, John, Arthur [AU/AU]; 198 A
MacDonnell RD, Clontarf, QLD 4019 (AU).

(74) Agent: CULLEN & CO.; Patent and Trade Mark Attor-
neys, 239 George Strand, Brisbane, QLD 4000 (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: FLUID PERMEABLE COMPOSITE MATERIAL AND PROCESS FOR SAME

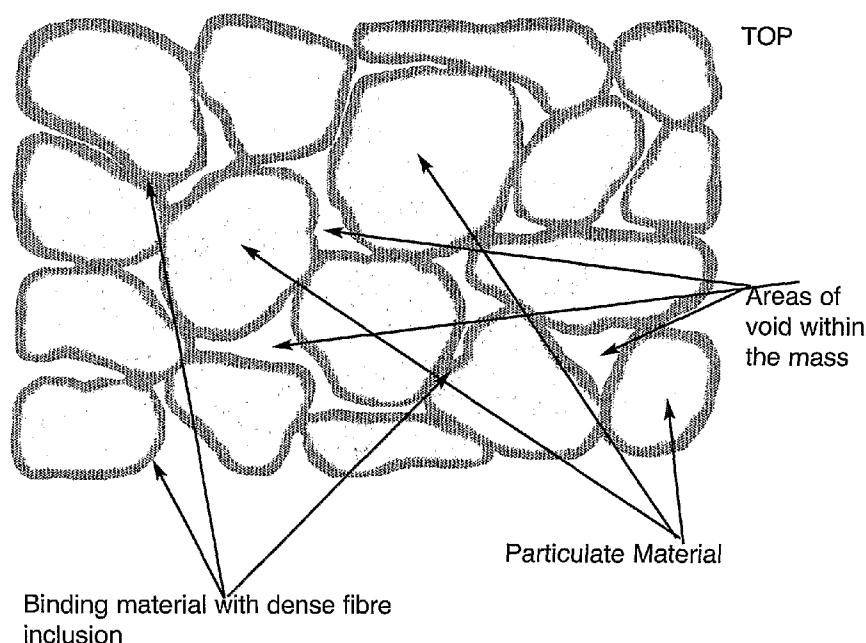

(57) Abstract: A curable composition for producing a fluid permeable composite material comprising: a particulate material and a binding agent comprising: 25-40 % by weight of an acrylic polymer, 0.5-20 % by weight of 10-35 % by weight of a homopolymer of an isocyanate and corresponding isocyanate polymerising agent for forming a crosslinked polymer with said acrylic polymer, and 20-50 % by weight of n-butyl acetate. The composite material, having high breaking and flexural strengths, is suitable for use in making pavers, bricks, tiles and stormwater entry grates.

WO 2005/116135 A1