(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
12 July 2001 (12.07.2001)

PCT

(10) International Publication Number
WO 01/50286 A1

(51) International Patent Classification[7]: G06F 13/42

(21) International Application Number: PCT/US00/31345

(22) International Filing Date:
16 November 2000 (16.11.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/475,985 30 December 1999 (30.12.1999) US

(71) Applicant: **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, P.O. Box 58119, Santa Clara, CA 95052-8119 (US).

(72) Inventors: **RODRIGUEZ, Pablo, M.**; 735 El Camino Real Avenue, Apt. #302, Burlington, CA 94010 (US). **ILKBAHAR, Alper**; 1418 Four Oaks Road, San Jose, CA 95131 (US).

(74) Agents: **ALTMILLER, John, C.** et al.; Kenyon & Kenyon, Suite 700, 1500 K Street, N.W., Washington, DC 20005 (US).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *With international search report.*
— *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR DIFFERENTIAL STROBING IN A COMMUNICATIONS BUS

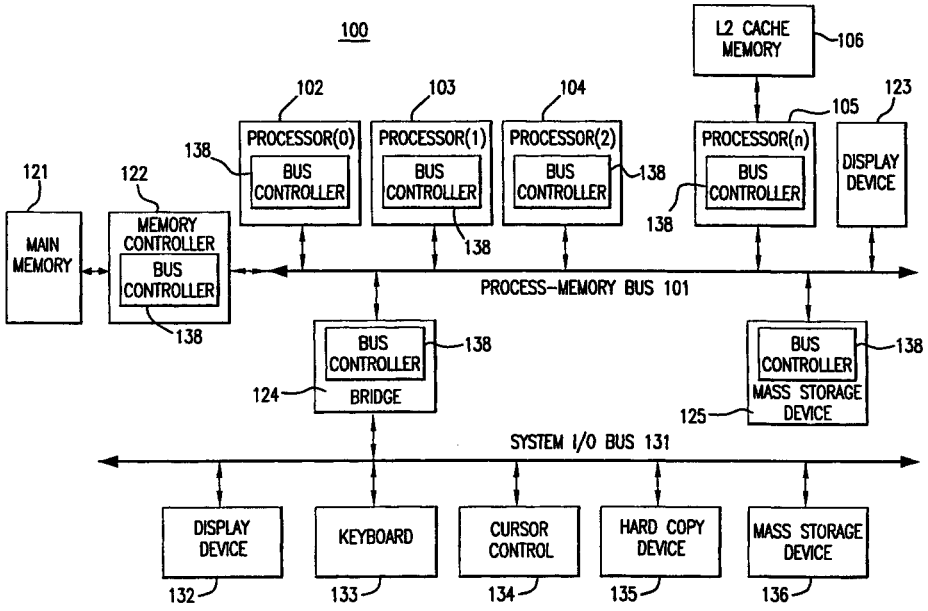

(57) Abstract: A method for ensuring proper strobe pre and post driving between a first data transfer and a second data transfer in a microprocessor system. The method includes generating a first strobe signal and a second strobe signal, pre-driving one of said first and second strobe signals before the first data transfer, post driving said pre-driven signal, determining which of said first and second strobe signals will be post driven, and pre-driving one of said first and second strobe signals before the second data transfer.

WO 01/50286 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.