

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 February 2005 (24.02.2005)

PCT

(10) International Publication Number
WO 2005/018052 A3

(51) International Patent Classification⁷: **H01R 13/648**

(21) International Application Number:

PCT/US2004/024691

(22) International Filing Date: 30 July 2004 (30.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/492,901 6 August 2003 (06.08.2003) US
10/842,397 10 May 2004 (10.05.2004) US

(71) Applicant (for BR, CA, MX only): **FCI AMERICAS TECHNOLOGY, INC.** [US/US]; One East First Street, Reno, NV 89501 (US).

(71) Applicant (for all designated States except BR, CA, MX, US): **FCI** [FR/FR]; 145/147, rue Yves Le Coz, F-78000 Versailles (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HULL, Gregory, A.** [US/US]; 2777 Olde Field Drive, York, PA 17404 (US). **STONER, Stuart, C.** [US/US]; 559 Fishing Creek Road, Lewisberry, PA 17339 (US). **MINICH, Steven, E.** [US/US]; 2605 Natalie Drive, York, PA 17402 (US). **RAISTRICK, Alan** [US/US]; 1061 Grand Oak Way, Rockville, Maryland 20852 (US).

(74) Agents: **DONOHUE, John, P.** et al.; Woodcock Washburn LLP, One Liberty Place - 46th Floor, Philadelphia, PA 19103 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: RETENTION MEMBER FOR CONNECTOR SYSTEM

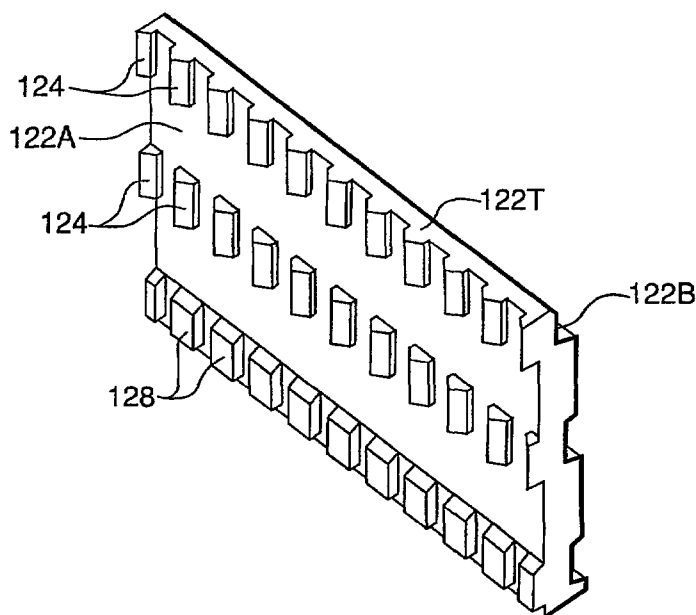

(57) Abstract: A retention member (120) aligns and stabilizes one or more insert molded lead assemblies (IMLAs) (102A, 102B) in an electrical connector. The retention member (120) provides for alignment and stability in the x-, y-, z-directions. Such a retention member (120) may be in connection with a right angle header connector (100). The retention member (120) provides stability by maintaining the true positioning of the terminal ends (110) of the contacts (104). The retention member (120) is expandable in length, and may be sized and shaped to fit a single header assembly (100) or multiple position configurations.

WO 2005/018052 A3



(88) Date of publication of the international search report:

9 September 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.