



- (51) International Patent Classification:
F28D 20/00 (2006.01) *B65G 5/00* (2006.01)
- (21) International Application Number:
PCT/SE2013/051281
- (22) International Filing Date:
1 November 2013 (01.11.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1251241-4 1 November 2012 (01.11.2012) SE
- (71) Applicant: **SKANSKA SVERIGE AB** [SE/SE];
Drottningtorget 14, S-205 33 Malmö (SE).
- (72) Inventors: **PILEBRO, Hans**; Oxelgränd 6, S-182 45 En-
ebyberg (SE). **STRAND, Tobias**; Beckasinvägen 7, S-123
52 Farsta (SE).
- (74) Agent: **AWAPATENT AB**; Box 5117, S-200 71 Malmö
(SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD FOR OPERATING AN ARRANGEMENT FOR STORING THERMAL ENERGY

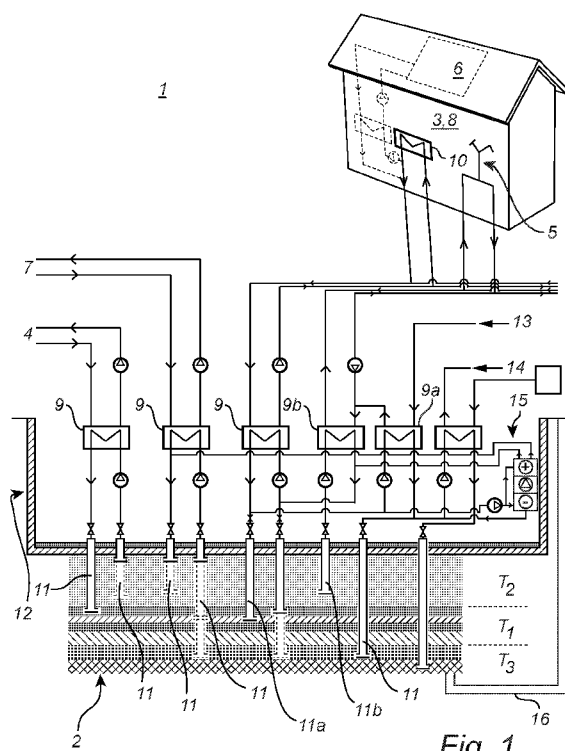


Fig. 1

(57) Abstract: The invention relates to a method for operating an arrangement (1) for storing thermal energy. The arrangement (1) comprises an energy storage (2) having a temperature gradient. The method comprises retrieving energy of a first temperature (T_1) from the energy storage (2) for use in a first heat-absorbing system (3), such that free space is created in the energy storage (2) for energy of a second temperature (T_2). The second temperature (T_2) is higher than the first temperature (T_1).



Published:

— *with international search report (Art. 21(3))*