



- (51) **International Patent Classification:**
B65D 17/00 (2006.01)
- (21) **International Application Number:**
PCT/EP2013/058228
- (22) **International Filing Date:**
19 April 2013 (19.04.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
1206989.4 20 April 2012 (20.04.2012) GB
- (71) **Applicant (for all designated States except LS):** **CROWN PACKAGING TECHNOLOGY, INC.** [US/US]; 11535 S Central Avenue, Alsip, Illinois 60803-2599 (US).
- (71) **Applicant (for LS only):** **CROWN PACKAGING UK PLC** [GB/GB]; Downsview Road, Wantage Oxfordshire OX12 9BP (GB).
- (72) **Inventors:** **RAMSEY, Christopher,Paul**; Braeside, Manor Road, Wantage Oxfordshire OX12 8DP (GB). **CAUNTER, Nicholas,James**; 95 Springfield Road, Wantage Oxfordshire OX12 8EZ (GB). **WINSTANLEY, Lucy**; Redcote, The Avenue, Bussage, Stroud Gloucestershire GL6 8AT (GB).
- (74) **Agent:** **SMITH, Debra**; Downsview Road, Wantage Oxfordshire OX12 9BP (GB).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) **Title:** CAN END

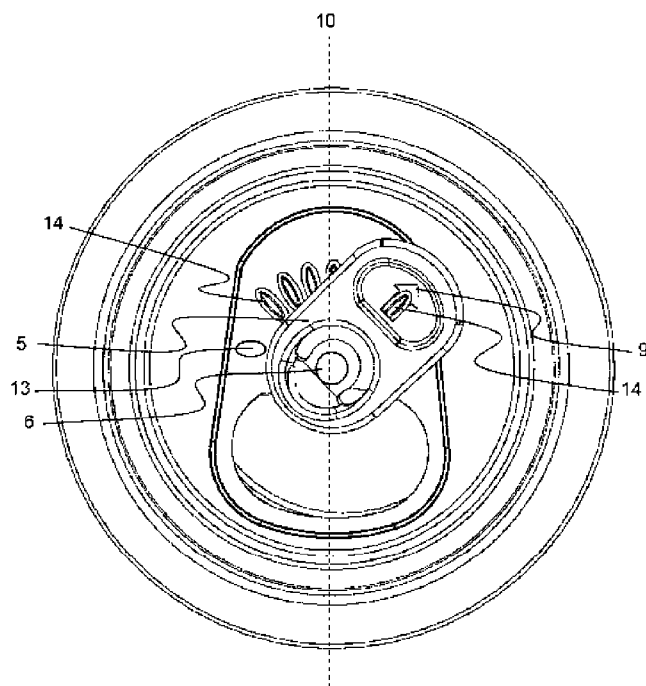


Figure 4

(57) **Abstract:** A can end (2) for a drinks can (1). The can end (2) is provided with a tab (5) attached to the can end (2) with a rivet (6). The tab (5) is initially flush against the can end (2), causing rotation to be restricted by friction between the tab (5) and the can end (2). However, once the drinks can (1) has been opened, the tab (5) is raised from the can end (2) and is easily rotatable about the rivet (5) to form a rotatable pointer. Additionally, the can end (2) includes two raised portions (13) disposed on either side of the tab (5), each raised portion (13) being arranged to limit the degree of rotation of the tab (5) about the rivet (6)

WO 2013/156624 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*