(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
22 February 2001 (22.02.2001)

PCT

(10) International Publication Number
WO 01/12992 A2

(51) International Patent Classification[7]: F04D

(21) International Application Number: PCT/JP00/05387

(22) International Filing Date: 11 August 2000 (11.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/227540 11 August 1999 (11.08.1999) JP

(71) Applicant *(for all designated States except US)*: TOSHIBA CARRIER CORPORATION [JP/JP]; 1-1, Shibaura 1-chome, Minato-ku, Tokyo 105-8001 (JP).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: ONODA, Izumi [JP/JP]; 245-2, Miyajima, Fuji-shi, Shizuoka 416-0945 (JP). KAWABE, Isao [JP/JP]; 974-8, Hoshiyama, Fujinomiya-shi, Shizuoka 418-0035 (JP). KATO, Hisataka [JP/JP]; 305, Konforu-Fuji, 172, Urijima, Fuji-shi, Shizuoka 417-0025 (JP).

(74) Agents: SUZUYE, Takehiko et al.; Suzuye & Suzuye, 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 100-0013 (JP).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *Without international search report and to be republished upon receipt of that report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COMPRESSOR

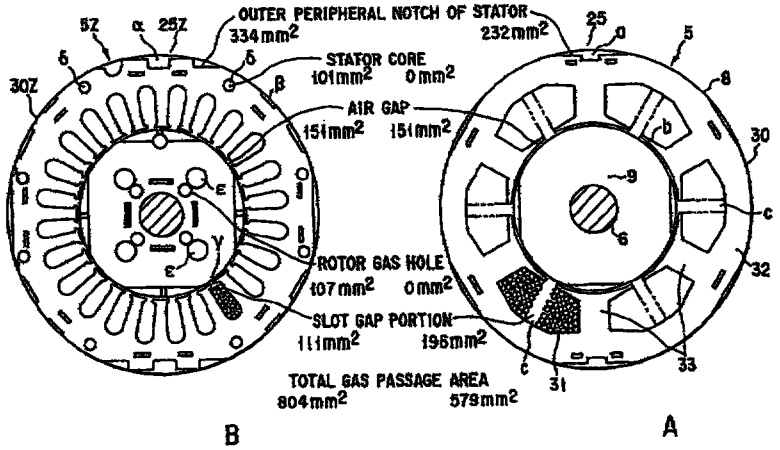

(57) Abstract: A compressor comprises a sealed case to which a suction pipe and a discharge pipe are connected, a compression mechanism unit provided within the sealed case, and a motor unit provided within the sealed case, the motor unit comprising a stator and a rotor for driving the compression mechanism unit, a gas passages for passing a gas discharged from the compression mechanism unit are formed in the motor unit, and a ratio of a total area of slot gap portions defined between slots of a stator core and coils in a stator of the motor unit to an entire area of the gas passages is set at 0.3 or more.

WO 01/12992 A2