



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: A62C 35/62 // 35/00	A1	(11) International Publication Number: WO 98/09684
		(43) International Publication Date: 12 March 1998 (12.03.98)

(21) International Application Number: PCT/FI97/00523

(22) International Filing Date: 5 September 1997 (05.09.97)

(30) Priority Data:


963486	5 September 1996 (05.09.96)	FI
963642	13 September 1996 (13.09.96)	FI
971118	17 March 1997 (17.03.97)	FI

(71)(72) Applicant and Inventor: SUNDHOLM, Göran [FI/FI];
Ilmari Kiannon kuja 3, FIN-04310 Tuusula (FI).(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box
148, FIN-00121 Helsinki (FI).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,
GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO,
NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR,
TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH,
KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ,
BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,
CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL,
PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: INSTALLATION FOR FIGHTING FIRE

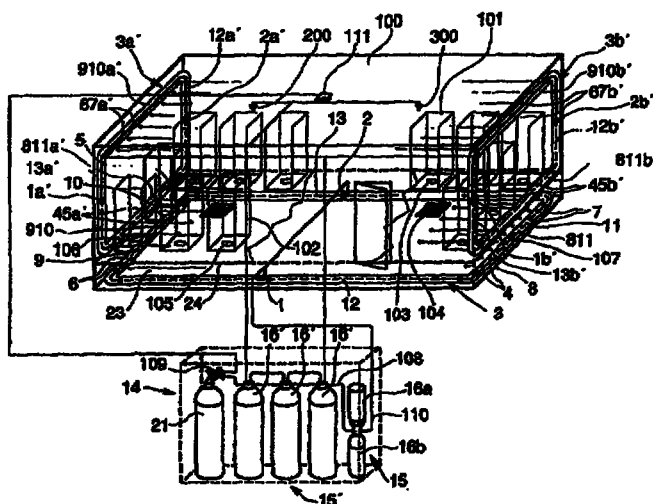

(57) Abstract

The present invention relates to an installation for fighting fire in a space, whereby the installation comprises a spray head (1a', 2a') of such a type that it is capable of producing extinguishing medium in the form of a finely divided liquid mist with a great penetrating ability and a simultaneous suction near the spray head. To obtain an installation which as regards its construction is simple and with which a fire in a space can be very efficiently extinguished so that the fumes are purified at the same time as the amount of water can be very small, the spray head (1a', 2a', 1b', 2b') is arranged in a pipe (3a', 3b') with a suction opening (67a', 67b') at a distance of 1 to 10 m from the floor level (24) of the room and a spray opening (45a', 45') near the floor level, whereby the spray head is arranged to spray in the direction from the suction opening to the spray opening to create a suction in the suction opening.